

SMD Power Inductor

CD43



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 4.8 × 4.3 × 3.5mm Max.
- Product weight :165mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.



Environmental Data

- Operating temperature range: -40°C~+100°C
(including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 12.9" diameter reel
- 1500pcs per reel



Applications

- Ideally used in Mobilephone, PDA, MP3, DSC/DVC, portable DVD etc. as DC-DC Converter inductors.


Dimension - [mm]

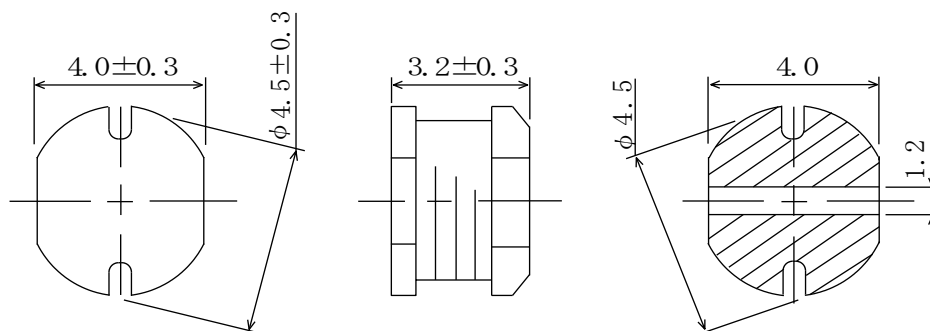

Land pattern and Schematics - [mm]

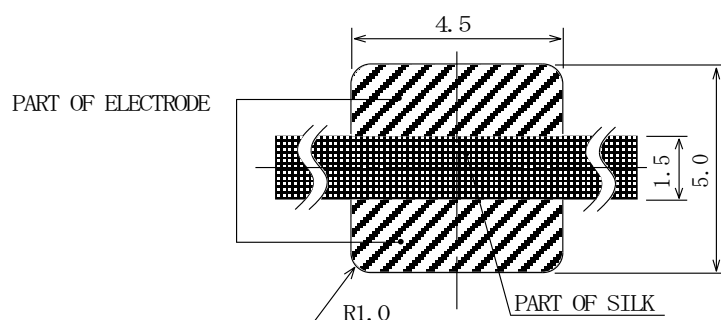

(1.0μH ~ 8.2μH)



(10μH ~ 68μH)

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CD43



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [Within]※1	D.C.R. (m Ω) [Max.] (20°C)	Rated Current (A) ※2
CD43NP-1R0MC	1R0	1.0 $\pm$ 20%	48.7	2.70
CD43NP-1R4MC	1R4	1.4 $\pm$ 20%	56.2	2.50
CD43NP-1R8MC	1R8	1.8 $\pm$ 20%	63.7	2.33
CD43NP-2R2MC	2R2	2.2 $\pm$ 20%	71.2	2.25
CD43NP-2R7MC	2R7	2.7 $\pm$ 20%	78.7	2.16
CD43NP-3R3MC	3R3	3.3 $\pm$ 20%	86.2	2.00
CD43NP-3R9MC	3R9	3.9 $\pm$ 20%	93.7	1.84
CD43NP-4R7MC	4R7	4.7 $\pm$ 20%	108.7	1.62
CD43NP-5R6MC	5R6	5.6 $\pm$ 20%	125.7	1.48
CD43NP-6R8MC	6R8	6.8 $\pm$ 20%	131.2	1.43
CD43NP-8R2MC	8R2	8.2 $\pm$ 20%	146.2	1.37
CD43NP-100MC	100	10 $\pm$ 20%	182	1.04
CD43NP-120MC	120	12 $\pm$ 20%	210	0.97
CD43NP-150MC	150	15 $\pm$ 20%	235	0.85
CD43NP-180MC	180	18 $\pm$ 20%	338	0.74
CD43NP-220MC	220	22 $\pm$ 20%	378	0.68
CD43NP-270MC	270	27 $\pm$ 20%	522	0.62
CD43NP-330KC	330	33 $\pm$ 10%	540	0.56
CD43NP-390KC	390	39 $\pm$ 10%	587	0.52
CD43NP-470KC	470	47 $\pm$ 10%	844	0.44
CD43NP-560KC	560	56 $\pm$ 10%	937	0.42
CD43NP-680KC	680	68 $\pm$ 10%	1117	0.37

※1 Inductance measuring frequency: 1.0 μ H $\sim$ 8.2 μ H; at 7.96 MHz.
10 μ H $\sim$ 68 μ H; at 2.52 MHz.

※2 Rated current: The DC current at which the inductance decreases to 90 % of it's initial value or when $\Delta t=40^{\circ}\text{C}$, whichever is lower ($T_a=20^{\circ}\text{C}$).

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


CD43




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


1. CD43NP-1R0MC

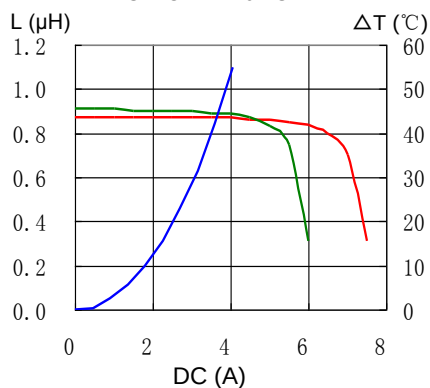


2. CD43NP-1R4MC

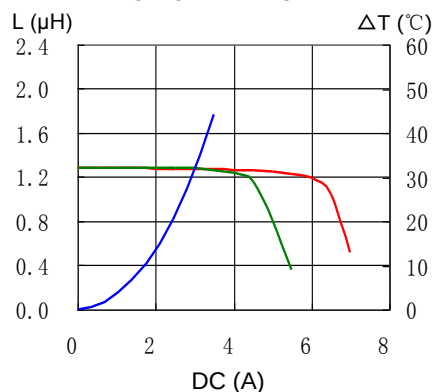


3. CD43NP-1R8MC

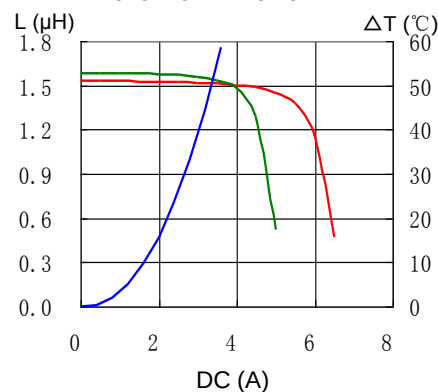


4. CD43NP-2R2MC

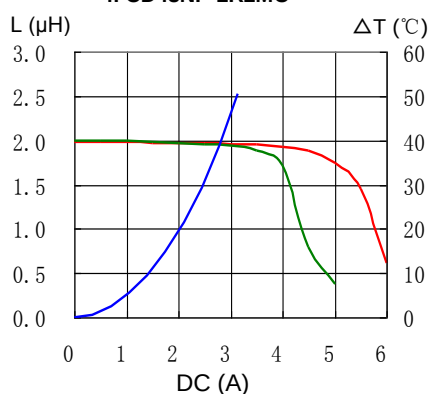


5. CD43NP-2R7MC

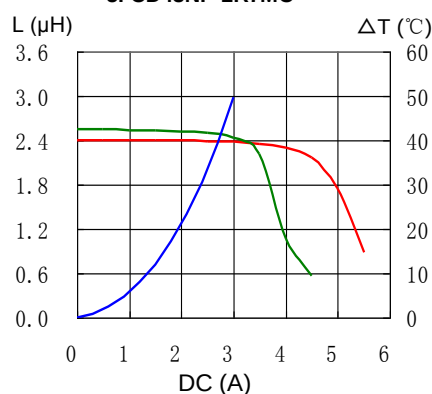


6. CD43NP-3R3MC

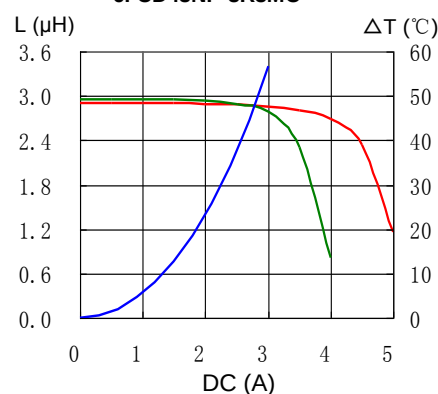


7. CD43NP-3R9MC

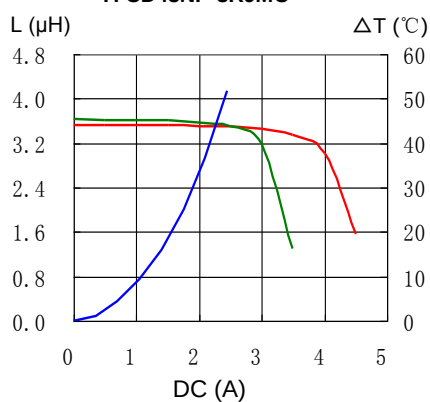

8. CD43NP-4R7MC

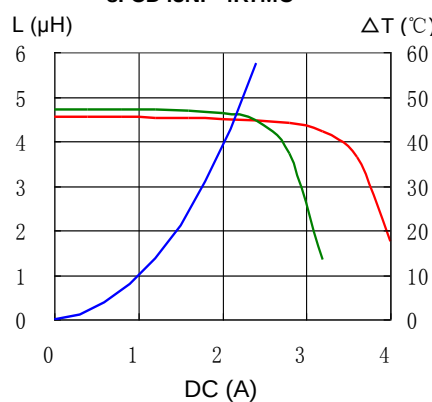

9. CD43NP-5R6MC

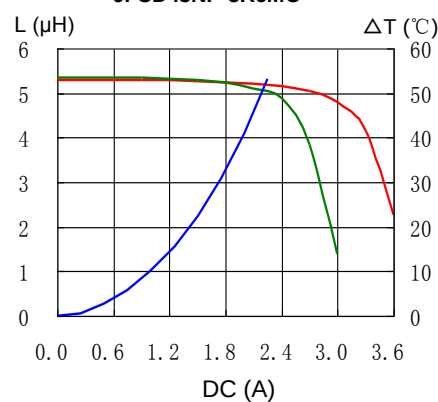

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.










SMD Power Inductor

CD43



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

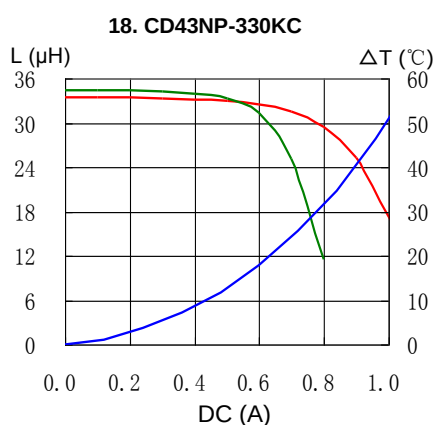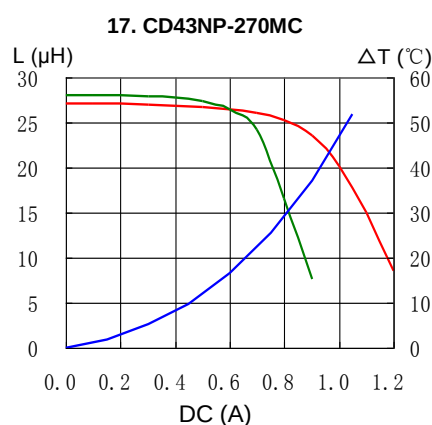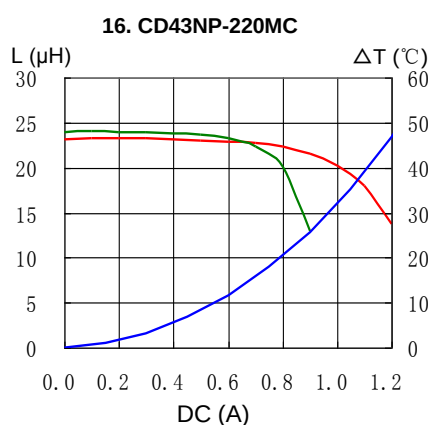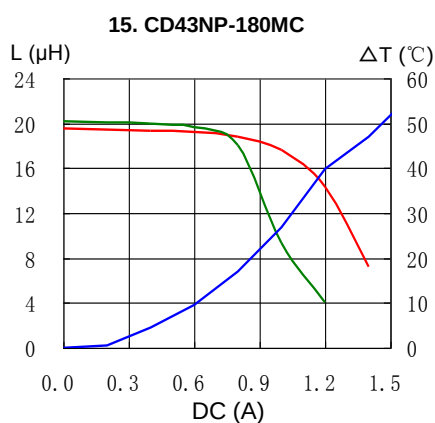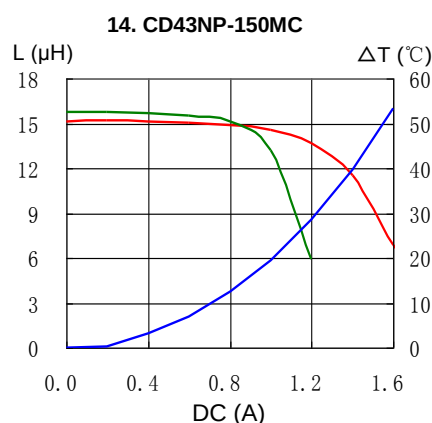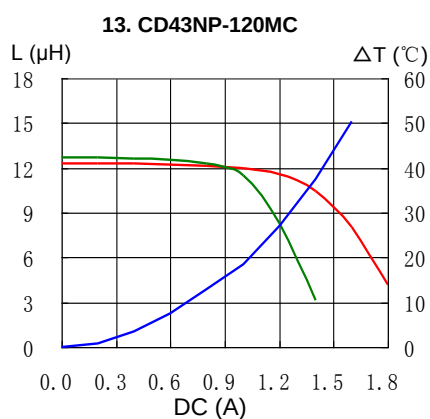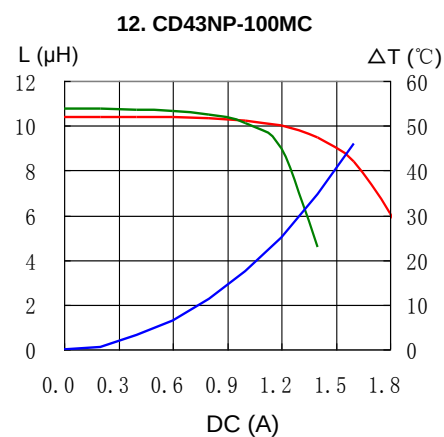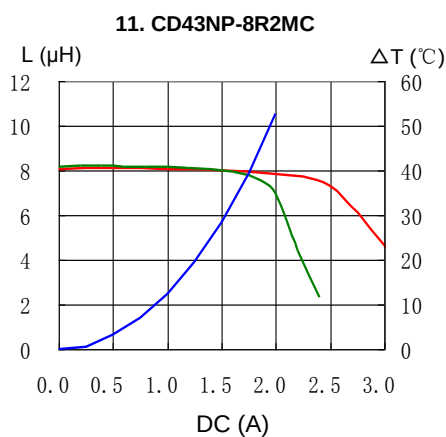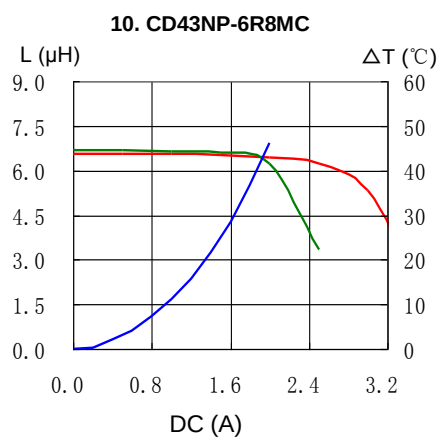

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


CD43




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


19. CD43NP-390KC

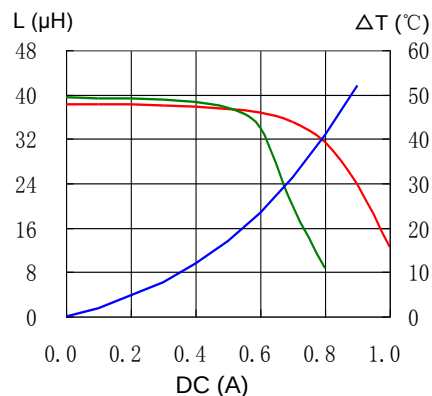


20. CD43NP-470KC

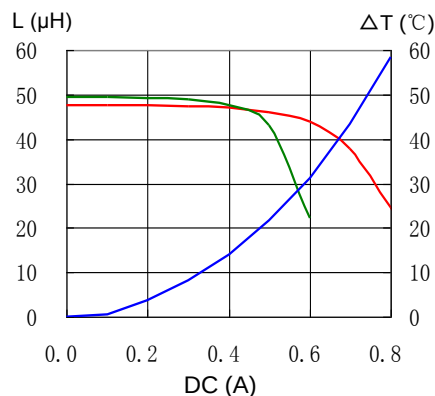

21. CD43NP-560KC

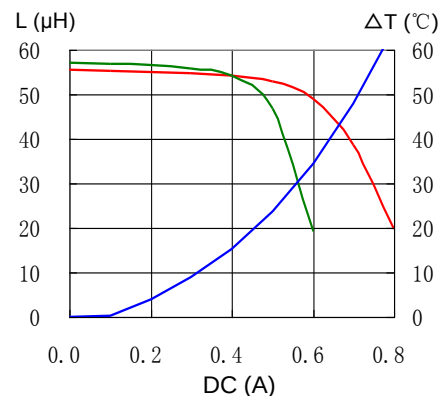

22. CD43NP-680KC

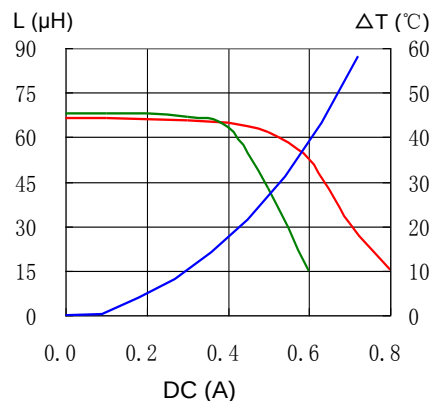



Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CD43



Solder Reflow Condition

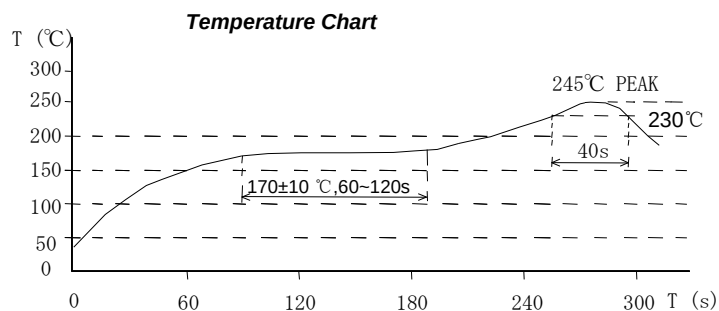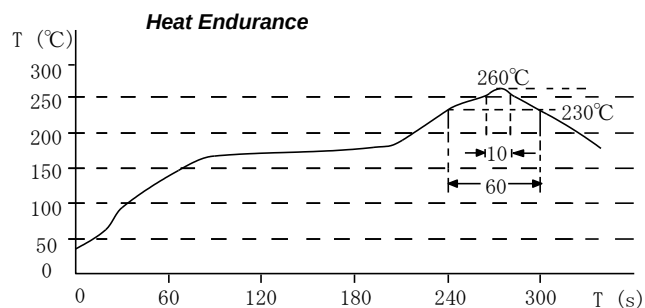

For sales office information, please [click here](#) to visit our website.

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sumida:](#)

[CD43NP-390KC](#) [CD43NP-1R4MC](#) [CD43NP-8R2MC](#) [CD43NP-2R7MC](#) [CD43NP-4R7MC](#) [CD43NP-150MC](#)
[CD43NP-270MC](#) [CD43NP-1R8MC](#) [CD43NP-3R3MC](#) [CD43NP-5R6MC](#) [CD43NP-330KC](#) [CD43NP-1R0MC](#) [CD43NP-](#)
[180MC](#) [CD43NP-2R2MC](#) [CD43NP-6R8MC](#) [CD43NP-560KC](#) [CD43NP-120MC](#)