

E. Battery Chargers



Rechargeable Alkaline Battery Charger - PS1

UK Plug/Continental Plug


- Dimensions:** 117 x 79 x 35 mm
- Battery Sizes:** AA and AAA Rechargeable Alkaline batteries only.
- Battery Quantity:** Any Combination of one to four AA and AAA can be charged at one time.
- LED Indicators:** Indicate battery inserted and charging properly.
- Approximate Charging Time:** 3-5 hours for AA and AAA. Batteries can be left in plugged-in charger for prolonged periods.
- Charging Current:** 200 mA-Maximum Average
- Electrical Input:** 220-240 Volts AC
50 Hertz
6 Watts
- Safety Listing:** IEC (CB Certificate) DE 2-000871
BEAB (UK) E5125
GS (Germany) S 9771000
Certified to comply with Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC

Warning:

Use only Rechargeable Alkaline Batteries. Any other type of battery may explode or leak, causing personal injury and property damage.

General Operation:

Load 1 to 4 Rechargeable Alkaline batteries into the PS1 Battery Charger. To load, first insert the positive (+) or nubbin end and then snap the negative (-) or flat end into place. Green LED lights next to each compartment will turn on indicating the battery is inserted properly and taking a charge. The Charger tests each battery before charging. If battery is properly placed in charger and the Green light does not come on, it may be a sign that the battery should be replaced. The Green lights will also go out to indicate charging is complete.

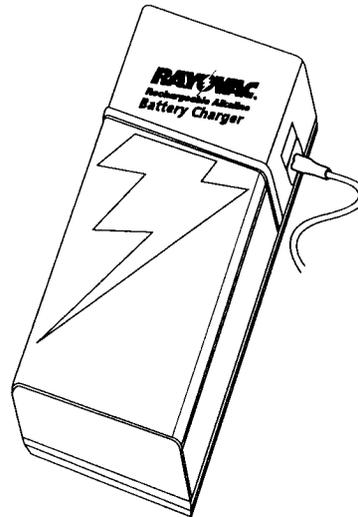

Rechargeable Alkaline Battery Charger - PS3

UK Cord & Plug/Continental Cord & Plug

- Dimensions:** 222 x 56 x 89 mm
- Battery Sizes:** D, C, AA and AAA Rechargeable Alkaline batteries only.
- Battery Quantity:** Any combination of one to eight AA, AAA, D and C can be charged at one time.
- LED Indicators:** Indicate battery inserted and charging properly.
- Approximate Charging Time:** 3-5 hours for AA and AAA. Overnight for C and D. Batteries can be left plugged in charger for prolonged periods.
- Charging Current:** 400 mA-Maximum Average
- Electrical Input:** 220-240 Volts AC
50 Hertz
10 Watts
- Safety Listing:** IEC (CB Certificate) DE2-001475
BEAB (UK) E8313
GS (Germany) S 9757968
Certified to comply with Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC

Warning:

Use only Rechargeable Alkaline Batteries. Any other type of battery may explode or leak, causing personal injury and property damage.

General Operation:

Load 1 to 8 Rechargeable Alkaline batteries into the PS3 Battery Charger. Use the negative (-) or flat end of the battery to slide back the metal bar and push down on the positive (+) or nubbin end of the battery until it is laying flat in the compartment. Green LED lights next to each compartment will turn on indicating the battery is inserted properly and taking a charge. The Charger tests each battery before charging. If battery is properly placed in charger and Green light does not come on, it may be a sign that the battery should be replaced. The Green lights will also go out to indicate charging is complete.