


Model 5051 Breakout: BNC (Female) To #8 Spade Lugs

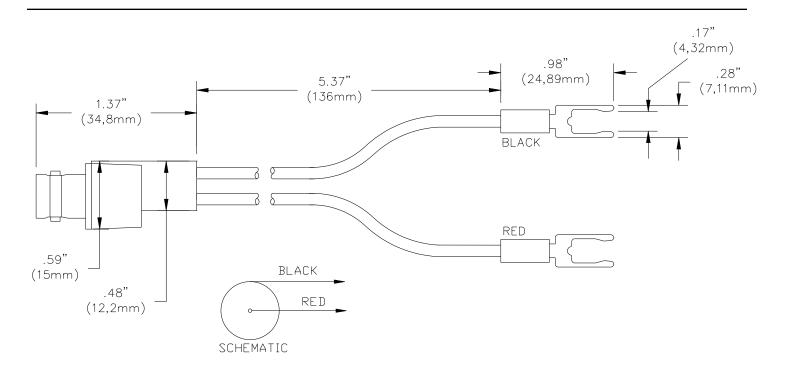

FEATURES:

- ✓ Converts BNC (male) cables / connectors to a #8 spade lug connector for terminal strip attachment.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC shell is tarnish resistant.
- ✓ BNC center contact is gold plated Beryllium Copper for excellent electrical connection.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE Wire: 20 AWG, PVC

#8 Spade Lug: Tin-plated copper alloy

Lug Insulation: Vinyl, color matches color of wire

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 500VRMS Max.

Operating Temperature: +131°F (+55°C) Max.

ORDERING INFORMATION: Model 5051

* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100 D1094267

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: 5051