

RG59B Coaxial Cable, BNC Male / Male, 25.0 ft

Features for this product

- 75 Ohm video signal transmission
- True 75 Ohm BNC eliminates interface impedance mismatch
- RG59B/U solid center conductor minimizes insertion loss
- Crimp style attachment and molded strain relief result in a highly durable assembly
- Available from stock in 19 lengths ranging from .5 to 200 feet



When you need a well built, durable RG59B/U cable assembly with true 75 Ohm BNC male connectors and you need it now we have your cable assembly in stock. We offer these highly popular 75 Ohm coaxial cable assemblies with molded strain reliefs for maximum durability. In addition our true 75 Ohm BNC connectors feature gold plated center contacts for minimal attenuation and nickel plated bodies for enhanced corrosion resistance. We typically stock these cables in a multiple of standard lengths from .5 ft to 200 ft. We are sure to have just the length you are looking for in stock ready for immediate delivery.

Details for this Coaxial product

L-com Item #	CC59B-25
Manufacturer	L-com
UPC #	822335006508
RoHS Status	RoHS Compliant 

Item #	Description																				
RG59A/U		- Center Conductor: 22 (7x30) AWG bare compacted copper - Shielding: Bare copper braid (96% coverage) - Insulation: Foam polyethylene - Jacket: Black PVC - Operating Temperature: -40°C - +80°C																			
		<table border="1"> <thead> <tr> <th colspan="3">NOMINAL ATTENUATION</th> </tr> <tr> <th>MHz</th><th>db/100 ft</th><th>db/100m</th></tr> </thead> <tbody> <tr> <td>50</td><td>2.1</td><td>6.9</td></tr> <tr> <td>100</td><td>3.0</td><td>9.8</td></tr> <tr> <td>200</td><td>4.5</td><td>14.8</td></tr> <tr> <td>400</td><td>6.6</td><td>21.7</td></tr> <tr> <td>1000</td><td>10.9</td><td>35.8</td></tr> </tbody> </table>	NOMINAL ATTENUATION			MHz	db/100 ft	db/100m	50	2.1	6.9	100	3.0	9.8	200	4.5	14.8	400	6.6	21.7	1000
NOMINAL ATTENUATION																					
MHz	db/100 ft	db/100m																			
50	2.1	6.9																			
100	3.0	9.8																			
200	4.5	14.8																			
400	6.6	21.7																			
1000	10.9	35.8																			

RG59A/U - 75 Ohm Coaxial Cables with Inline BNC to Type F Plug

CC59A-BF-1	RG59A Cable, BNC Male / Type F Male, 1.0 ft
CC59A-BF-3	RG59A Cable, BNC Male / Type F Male, 3.0 ft
CC59A-BF-6	RG59A Cable, BNC Male / Type F Male, 6.0 ft
CC59A-BF-9	RG59A Cable, BNC Male / Type F Male, 9.0 ft
CC59A-BF-12	RG59A Cable, BNC Male / Type F Male, 12.0 ft

RG59A/U - 75 Ohm Coaxial Cables with Two Type F Plugs

CCF59-1	RG59A Cable, Type F Male / Male, 1.0 ft
CCF59-3	RG59A Cable, Type F Male / Male, 3.0 ft
CCF59-6	RG59A Cable, Type F Male / Male, 6.0 ft
CCF59-9	RG59A Cable, Type F Male / Male, 9.0 ft
CCF59-12	RG59A Cable, Type F Male / Male, 12.0 ft
CCF59-25	RG59A Cable, Type F Male / Male, 25.0 ft
CCF59-50	RG59A Cable, Type F Male / Male, 50.0 ft
CCF59-100	RG59A Cable, Type F Male / Male, 100.0 ft

RG59A/U - 75 Ohm Coaxial Cables with One Inline Type F Plug and One Type F Bulkhead Jack

CCF59-MF-1	RG59A Cable, Type F Male / Female, 1.0 ft
CCF59-MF-6	RG59A Cable, Type F Male / Female, 6.0 ft
CCF59-MF-12	RG59A Cable, Type F Male / Female, 12.0 ft
CCF59-MF-25	RG59A Cable, Type F Male / Female, 25.0 ft
CCF59-MF-50	RG59A Cable, Type F Male / Female, 50.0 ft

RG59A/U - 75 Ohm Coaxial Cables with Two Inline RCA Plugs

CC59A-RR-1	RG59A Cable, RCA Male / Male, 1.0 ft
CC59A-RR-3	RG59A Cable, RCA Male / Male, 3.0 ft
CC59A-RR-6	RG59A Cable, RCA Male / Male, 6.0 ft
CC59A-RR-9	RG59A Cable, RCA Male / Male, 9.0 ft
CC59A-RR-12	RG59A Cable, RCA Male / Male, 12.0 ft

RG59A/U - 75 Ohm Coaxial Cables with Inline RCA to Inline BNC Plug

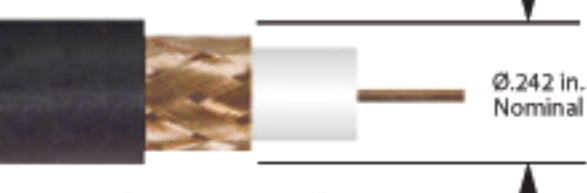
CC59A-RB-1	RG59A Cable, RCA Male / BNC Male, 1.0 ft
CC59A-RB-3	RG59A Cable, RCA Male / BNC Male, 3.0 ft
CC59A-RB-6	RG59A Cable, RCA Male / BNC Male, 6.0 ft
CC59A-RB-9	RG59A Cable, RCA Male / BNC Male, 9.0 ft
CC59A-RB-12	RG59A Cable, RCA Male / BNC Male, 12.0 ft

RG59A/U - 75 Ohm Coaxial Cables with Inline RCA to Type F Plug

CC59A-RF-1	RG59A Cable, RCA Male / Type F Male, 1.0 ft
CC59A-RF-3	RG59A Cable, RCA Male / Type F Male, 3.0 ft
CC59A-RF-6	RG59A Cable, RCA Male / Type F Male, 6.0 ft
CC59A-RF-9	RG59A Cable, RCA Male / Type F Male, 9.0 ft
CC59A-RF-12	RG59A Cable, RCA Male / Type F Male, 12.0 ft

RG59B/U - 75 Ohm Coaxial Cables with Molded BNC Plugs

L-com offers a wide variety of RG59B/U cable assemblies utilizing BNC and Type F connectors. RG59B/U cable is one of the most commonly used 75 Ohm cables. In addition to inline configurations L-com offers right angle and female bulkheads. All connectors feature a molded strain relief while the Type F connector features a captivated gold plated center pin for enhanced performance. The solid center conductor of the RG59B/U cable provides optimum insertion loss performance.

RG59B/U		- Center Conductor: 22 AWG solid bare copper covered steel - Shielding: Bare copper braid (95% coverage) - Insulation: Polyethylene - Jacket: Black PVC - Operating Temperature: -40°C - +80°C																			
		<table border="1"> <thead> <tr> <th colspan="3">NOMINAL ATTENUATION</th> </tr> <tr> <th>MHz</th><th>db/100 ft</th><th>db/100m</th></tr> </thead> <tbody> <tr> <td>50</td><td>2.4</td><td>7.9</td></tr> <tr> <td>100</td><td>3.4</td><td>11.1</td></tr> <tr> <td>200</td><td>4.9</td><td>16.1</td></tr> <tr> <td>400</td><td>7.0</td><td>23.0</td></tr> <tr> <td>1000</td><td>12.0</td><td>39.3</td></tr> </tbody> </table>	NOMINAL ATTENUATION			MHz	db/100 ft	db/100m	50	2.4	7.9	100	3.4	11.1	200	4.9	16.1	400	7.0	23.0	1000
NOMINAL ATTENUATION																					
MHz	db/100 ft	db/100m																			
50	2.4	7.9																			
100	3.4	11.1																			
200	4.9	16.1																			
400	7.0	23.0																			
1000	12.0	39.3																			

RG59B/U - 75 Ohm Coaxial Cables with Two Inline BNC Plugs

CC59B-05	RG59B Cable, BNC Male / Male, 0.5 ft
CC59B-1	RG59B Cable, BNC Male / Male, 1.0 ft
CC59B-1.5	RG59B Cable, BNC Male / Male, 1.5 ft
CC59B-2	RG59B Cable, BNC Male / Male, 2.0 ft
CC59B-2.5	RG59B Cable, BNC Male / Male, 2.5 ft
CC59B-3	RG59B Cable, BNC Male / Male, 3.0 ft
CC59B-4	RG59B Cable, BNC Male / Male, 4.0 ft
CC59B-5	RG59B Cable, BNC Male / Male, 5.0 ft
CC59B-6	RG59B Cable, BNC Male / Male, 6.0 ft
CC59B-7.5	RG59B Cable, BNC Male / Male, 7.5 ft
CC59B-10	RG59B Cable, BNC Male / Male, 10.0 ft
CC59B-12	RG59B Cable, BNC Male / Male, 12.0 ft
CC59B-15	RG59B Cable, BNC Male / Male, 15.0 ft
CC59B-25	RG59B Cable, BNC Male / Male, 25.0 ft
CC59B-50	RG59B Cable, BNC Male / Male, 50.0 ft
CC59B-75	RG59B Cable, BNC Male / Male, 75.0 ft
CC59B-100	RG59B Cable, BNC Male / Male, 100.0 ft
CC59B-150	RG59B Cable, BNC Male / Male, 150.0 ft
CC59B-200	RG59B Cable, BNC Male / Male, 200.0 ft

