

UN6211/6212/6213/6214/6215/6216/6217/6218/ 6219/6210/621D/621E/621F/621K/621L

Silicon NPN epitaxial planer transistor


For digital circuits

Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- MT-1 type package, allowing supply with the radial taping.

Resistance by Part Number

	(R ₁)	(R ₂)
• UN6211	10kΩ	10kΩ
• UN6212	22kΩ	22kΩ
• UN6213	47kΩ	47kΩ
• UN6214	10kΩ	47kΩ
• UN6215	10kΩ	—
• UN6216	4.7kΩ	—
• UN6217	22kΩ	—
• UN6218	0.51kΩ	5.1kΩ
• UN6219	1kΩ	10kΩ
• UN6210	47kΩ	—
• UN621D	47kΩ	10kΩ
• UN621E	47kΩ	22kΩ
• UN621F	4.7kΩ	10kΩ
• UN621K	10kΩ	4.7kΩ
• UN621L	4.7kΩ	4.7kΩ

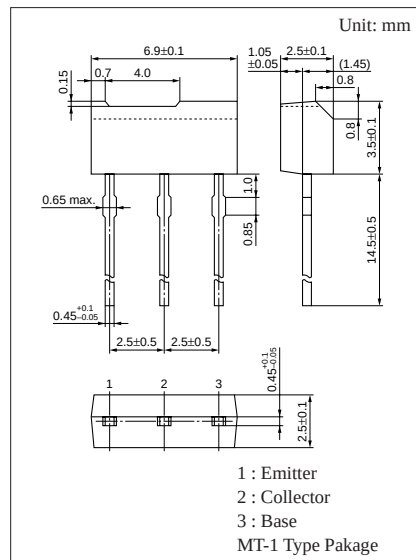

Internal Connection

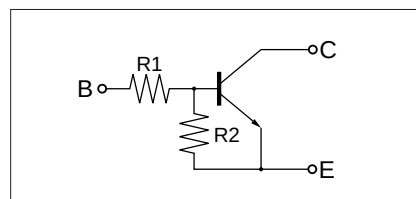

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V _{CBO}	50	V
Collector to emitter voltage	V _{CEO}	50	V
Collector current	I _C	100	mA
Total power dissipation	P _T	400	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

UN6211/6212/6213/6214/6215/6216/6217/6218/
Transistors with built-in Resistor 6219/6210/621D/621E/621F/621K/621L


■ Electrical Characteristics (Ta=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Collector cutoff current		I _{CBO}	V _{CB} = 50V, I _E = 0			0.1	μA
		I _{CEO}	V _{CE} = 50V, I _B = 0			0.5	μA
Emitter cutoff current	UN6211	I _{EBO}	V _{EB} = 6V, I _C = 0			0.5	mA
	UN6212/6214/621E/621D					0.2	
	UN6213					0.1	
	UN6215/6216/6217/6210					0.01	
	UN621F/621K					1.0	
	UN6219					1.5	
	UN6218/621L					2.0	
Collector to base voltage		V _{CBO}	I _C = 10μA, I _E = 0	50			V
Collector to emitter voltage		V _{CEO}	I _C = 2mA, I _B = 0	50			V
Forward current transfer ratio	UN6211	h _{FE}	V _{CE} = 10V, I _C = 5mA	35			
	UN6212/621E			60			
	UN6213/6214			80			
	UN6215*/6216*/6217*/6210*			160		460	
	UN621F/621D/6219			30			
	UN6218/621K/621L			20			
Collector to emitter saturation voltage		V _{CE(sat)}	I _C = 10mA, I _B = 0.3mA			0.25	V
Output voltage high level		V _{OH}	V _{CC} = 5V, V _B = 0.5V, R _L = 1kΩ	4.9			V
Output voltage low level		V _{OL}	V _{CC} = 5V, V _B = 2.5V, R _L = 1kΩ			0.2	V
			V _{OC} = 5V, V _B = 3.5V, R ₁ = 1kΩ			0.2	
			V _{CC} = 5V, V _B = 10V, R ₁ = 1kΩ			0.2	
			V _{CC} = 5V, V _B = 6V, R _L = 1kΩ			0.2	
Transition frequency		f _T	V _{CB} = 10V, I _E = -2mA, f = 200MHz		150		MHz
Input resistance	UN6211/6214/6215/621K	R ₁		(-30%)	10	(+30%)	kΩ
	UN6212/6217				22		
	UN6213/621D/621E/6210				47		
	UN6216/621F/621L				4.7		
	UN6218				0.51		
	UN6219				1		
Resistance ratio	UN6211/6212/6213/621L	R ₁ /R ₂		0.8	1.0	1.2	
	UN6214			0.17	0.21	0.25	
	UN6218/6219			0.08	0.1	0.12	
	UN621D			3.7	4.7	5.7	
	UN621E			1.7	2.14	2.6	
	UN621F			0.37	0.47	0.57	
	UN621K			1.7	2.13	2.6	







* h_{FE} rank classification (UN6215/6216/6217/6210)

Rank	Q	R	S
h_{FE}	160 to 260	210 to 340	290 to 460


Common characteristics chart

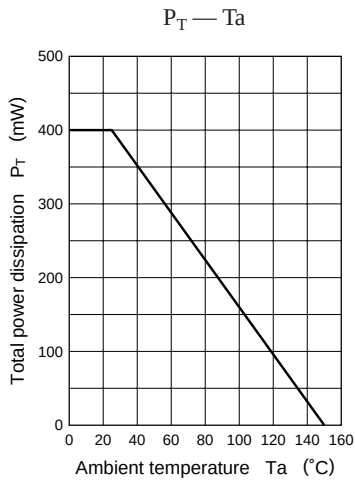


Characteristics charts of UN6211

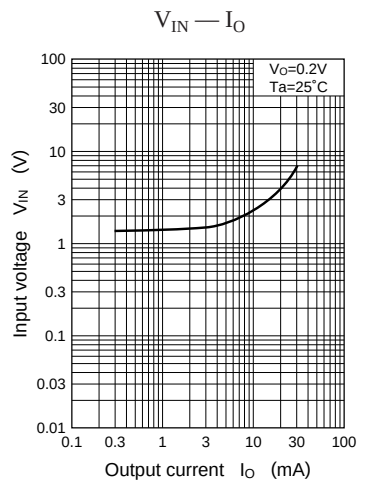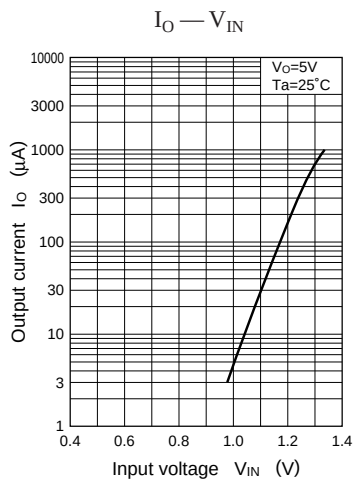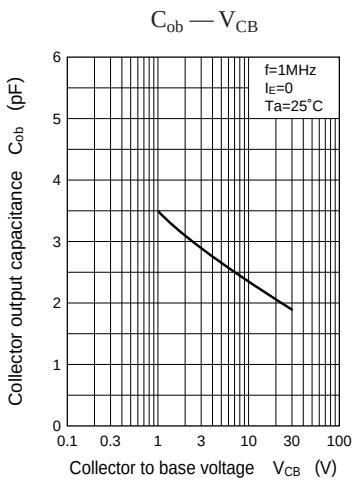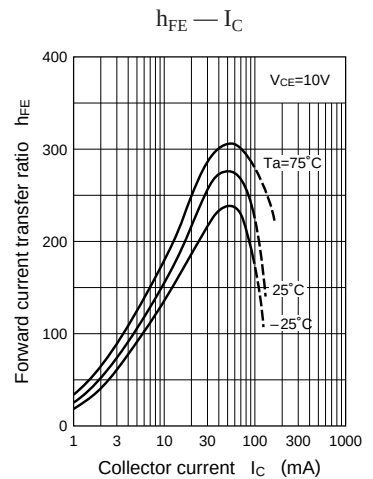
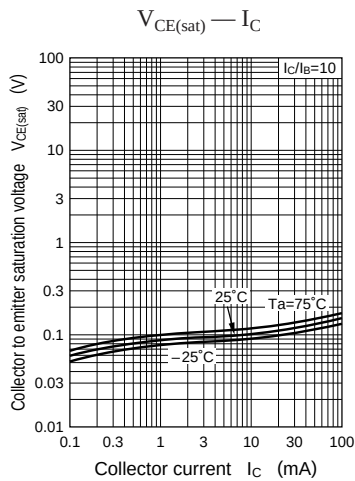
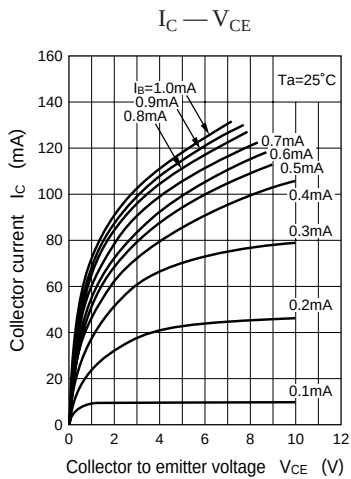


Characteristics charts of UN6212






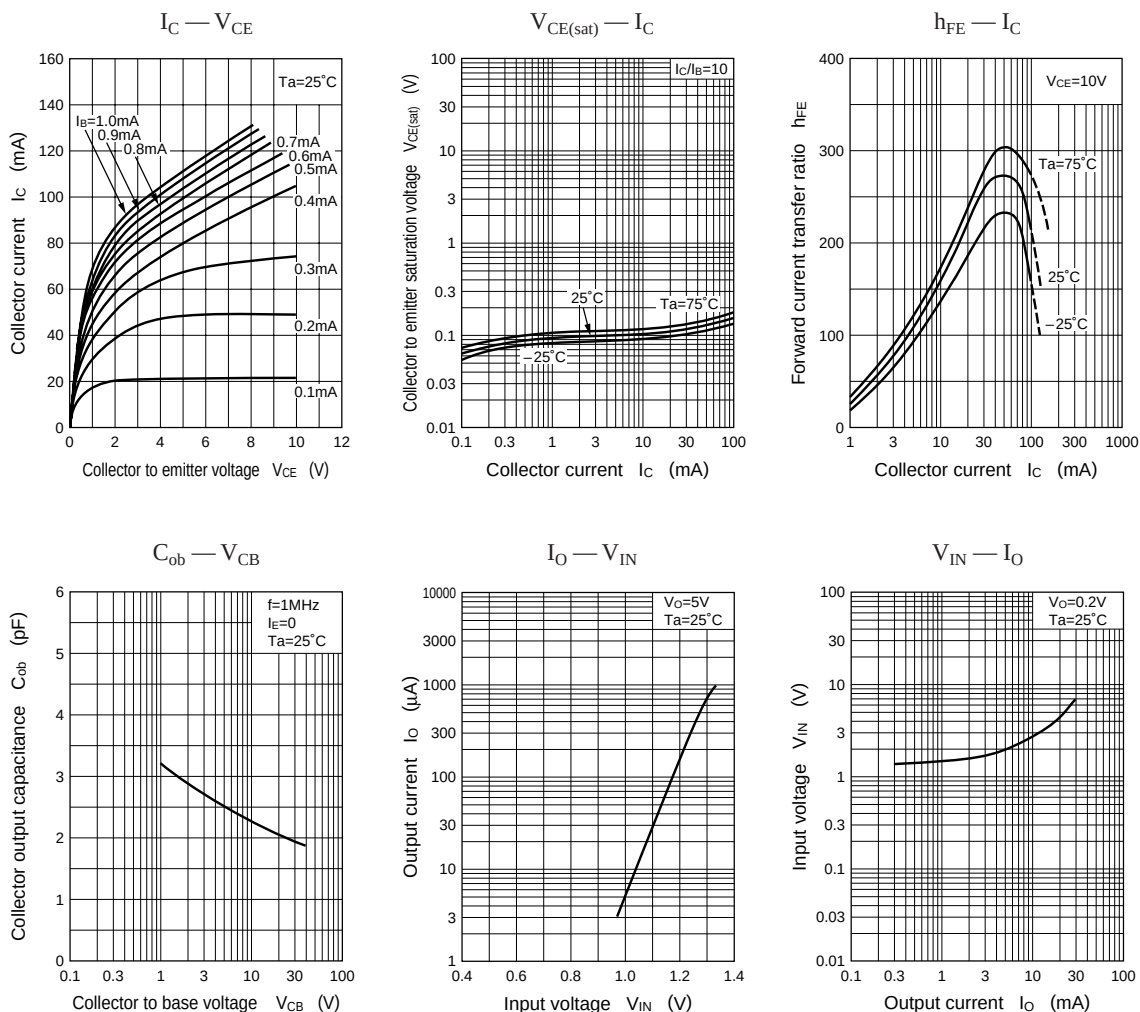


Characteristics charts of UN6213

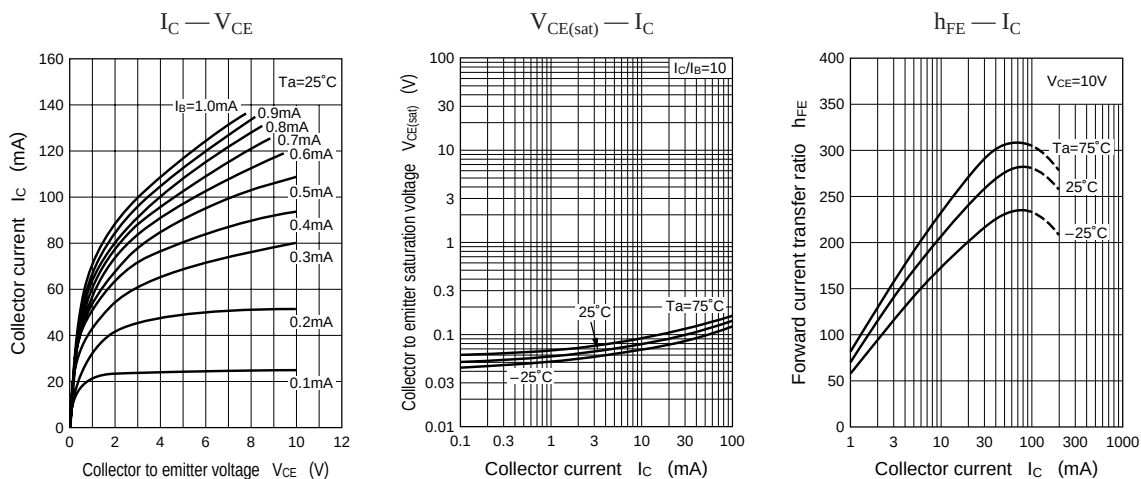


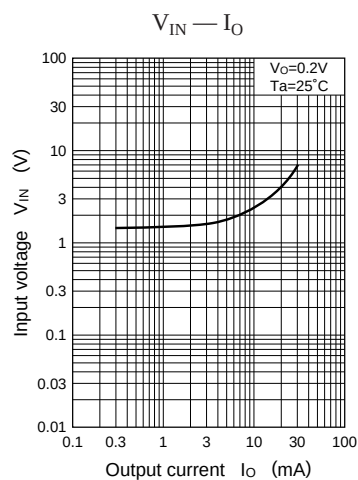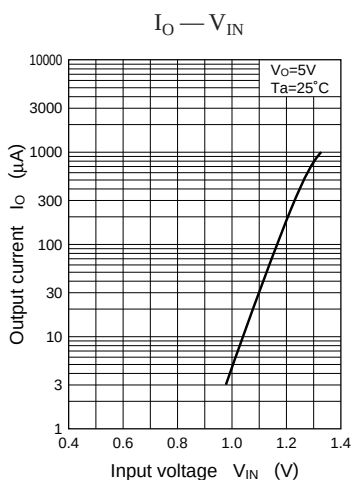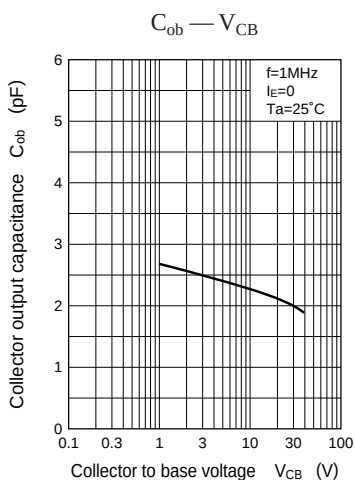


Characteristics charts of UN6214

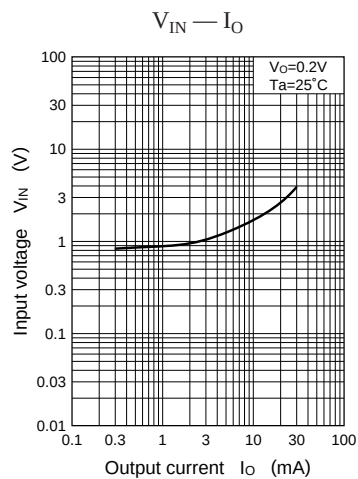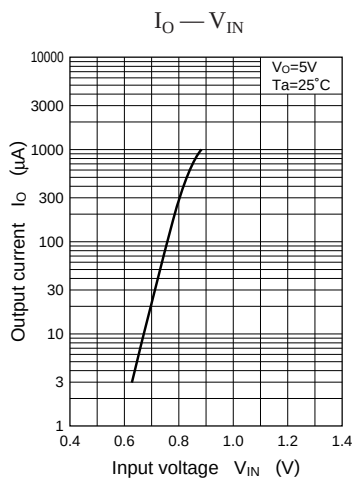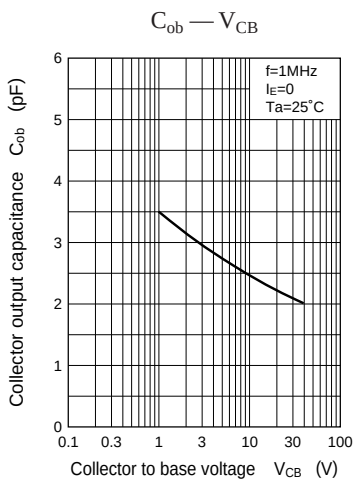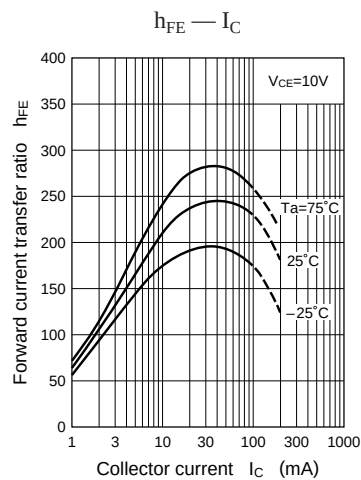
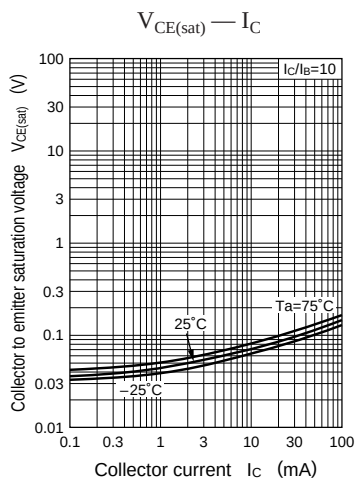
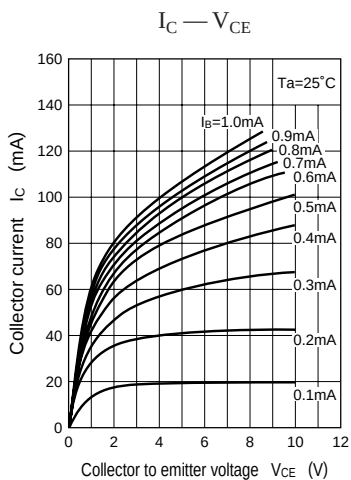


Characteristics charts of UN6215






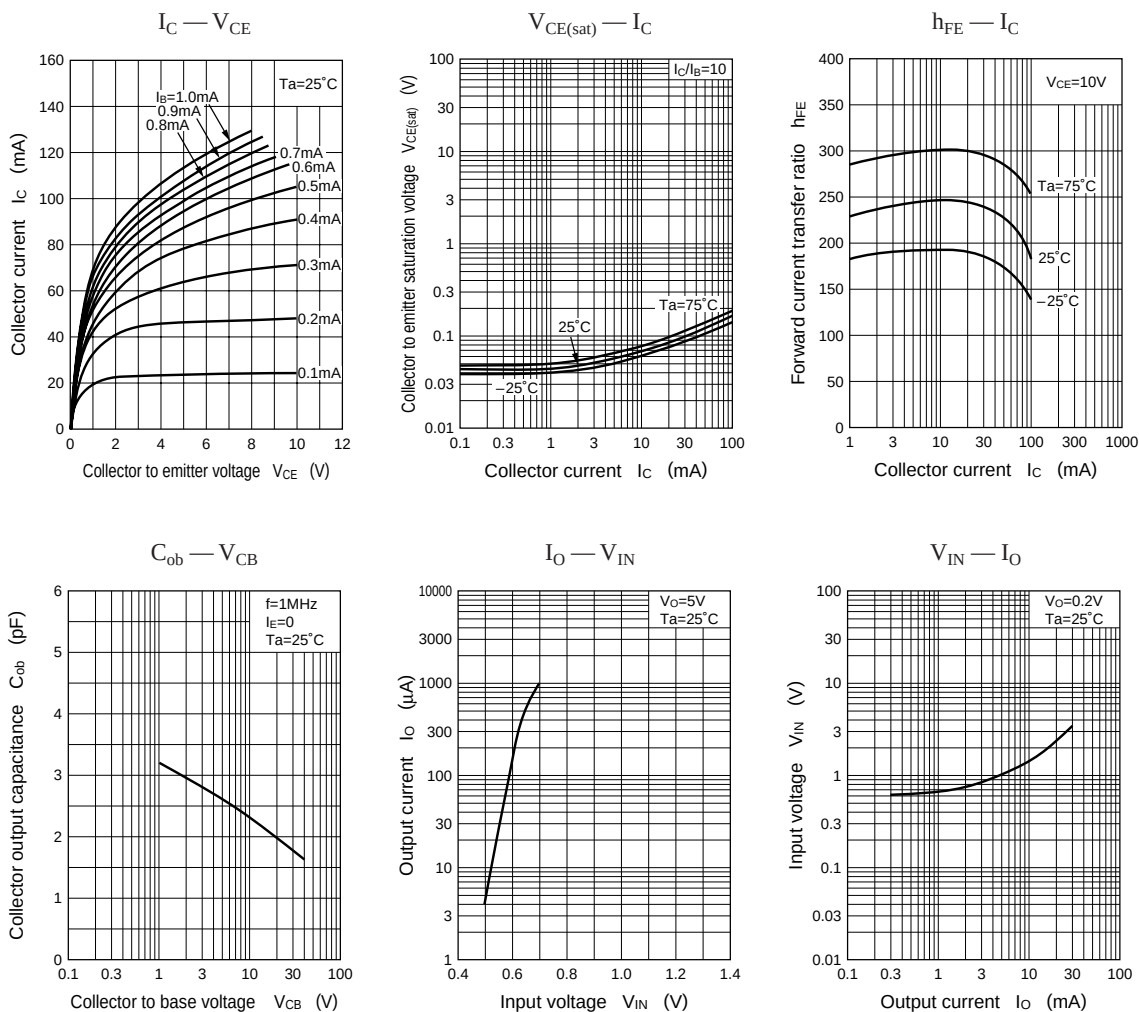


Characteristics charts of UN6216

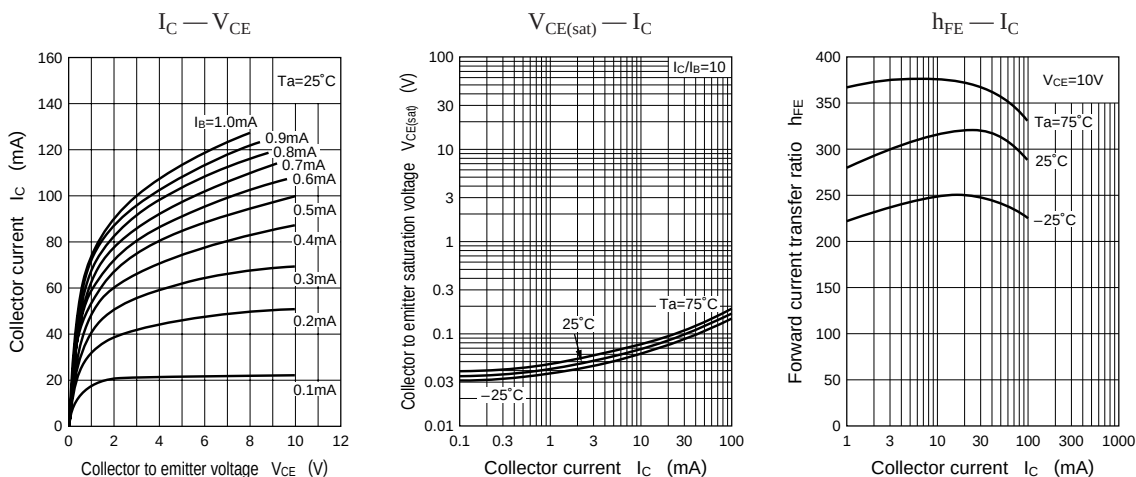


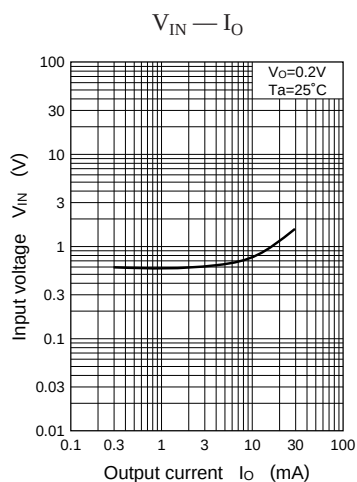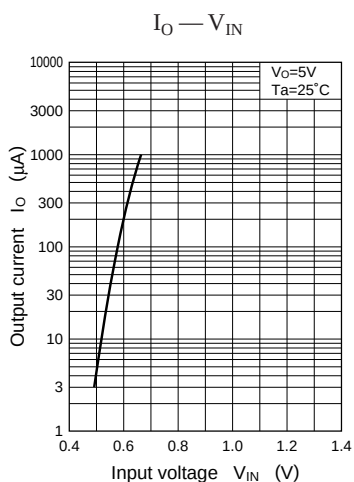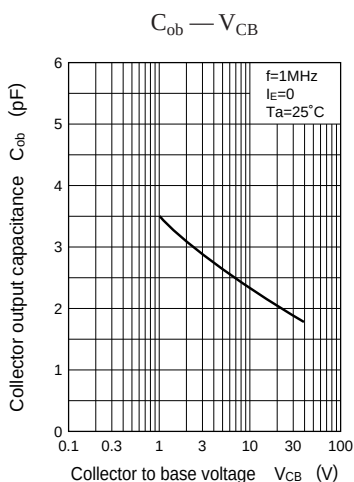


Characteristics charts of UN6217

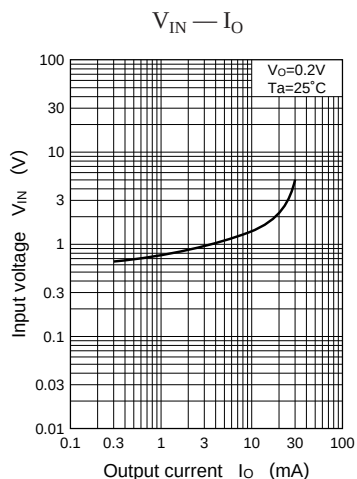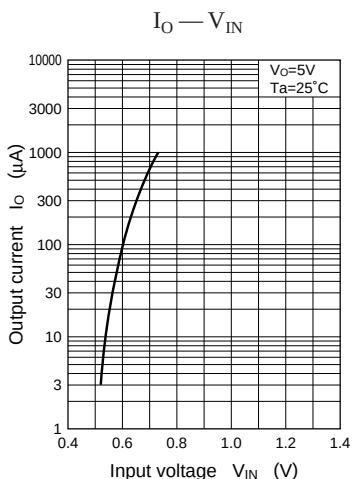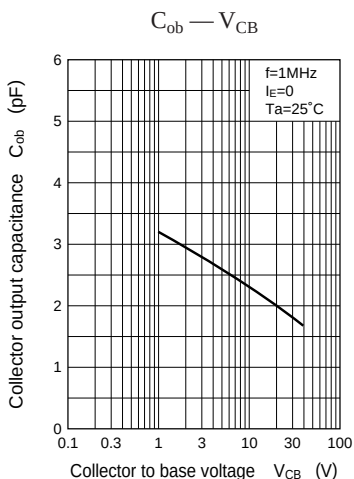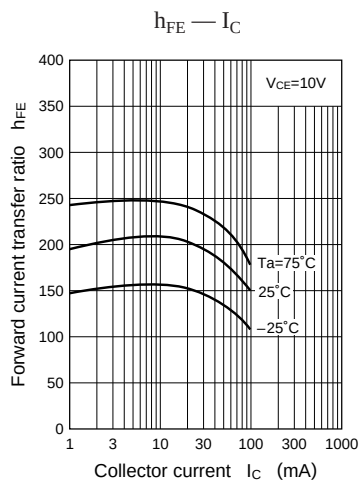
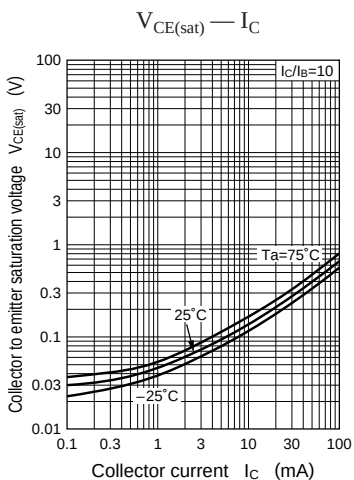
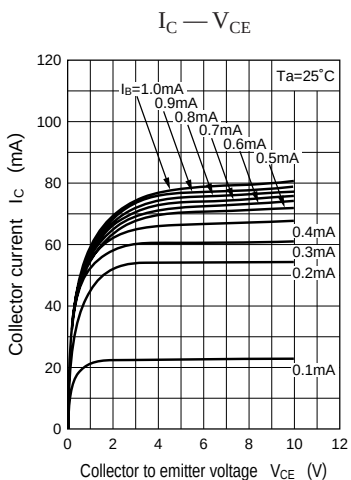


Characteristics charts of UN6218






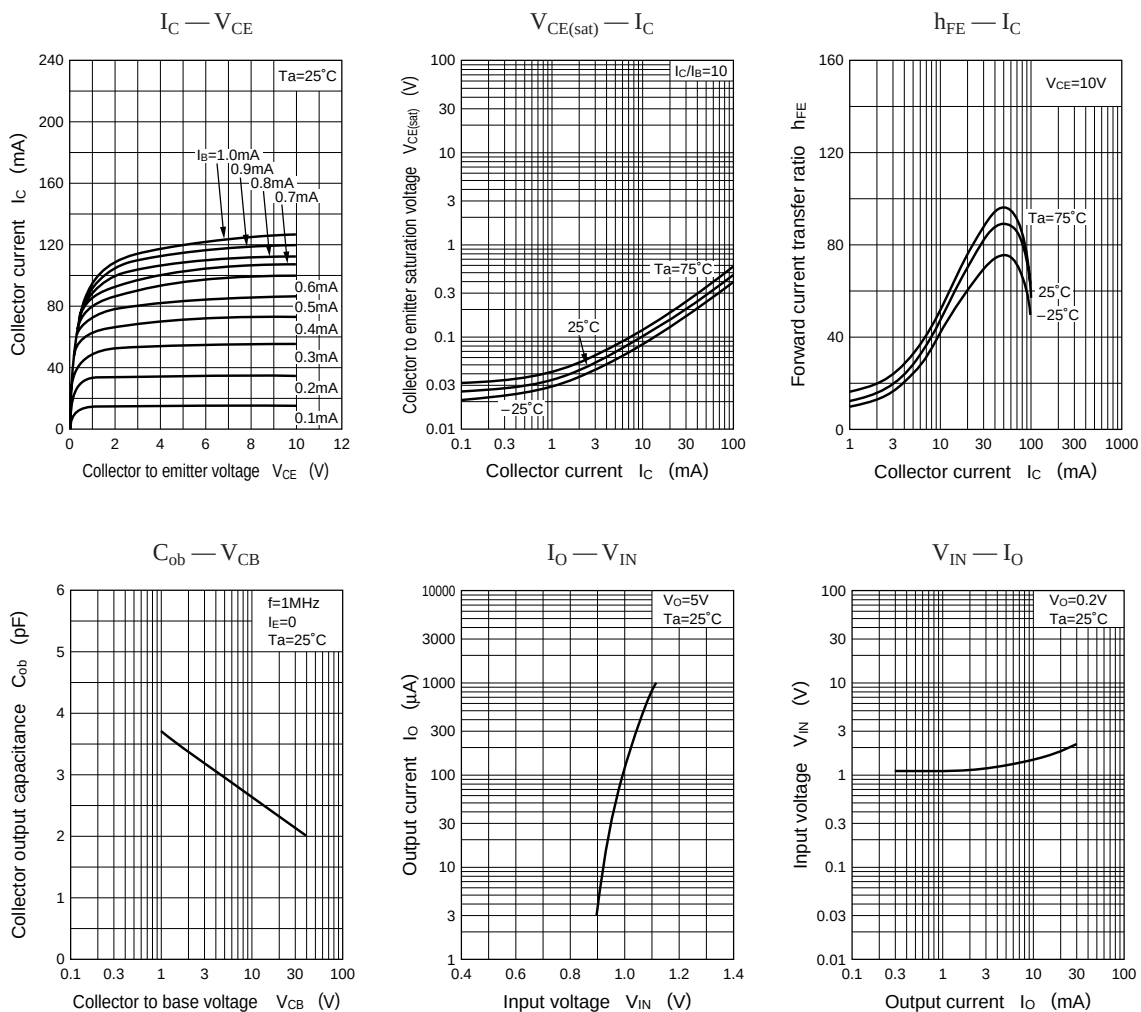


Characteristics charts of UN6219






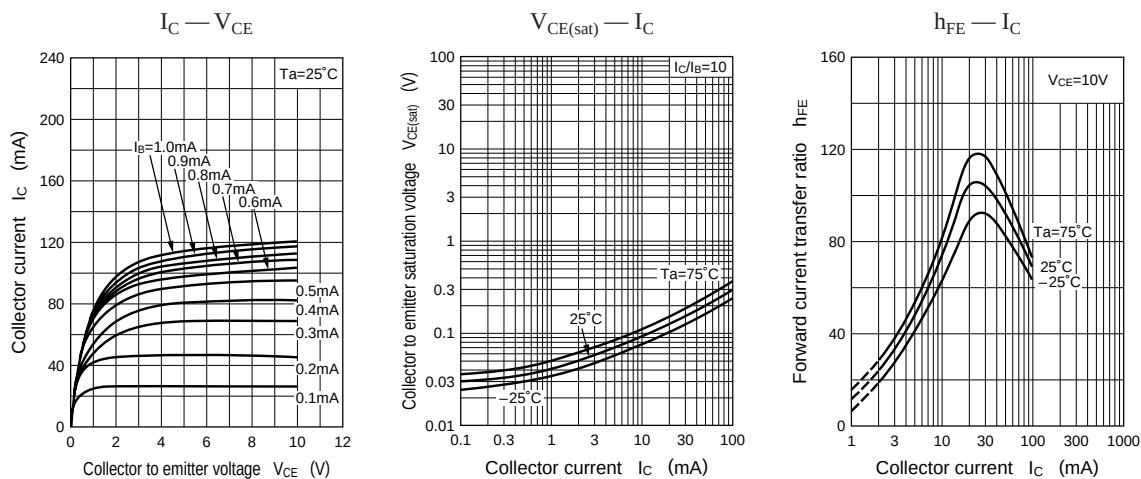


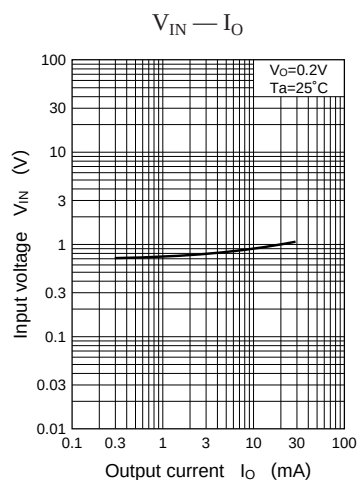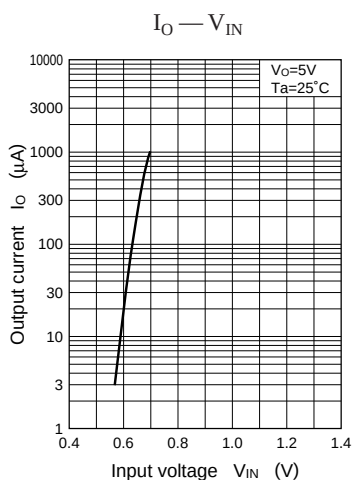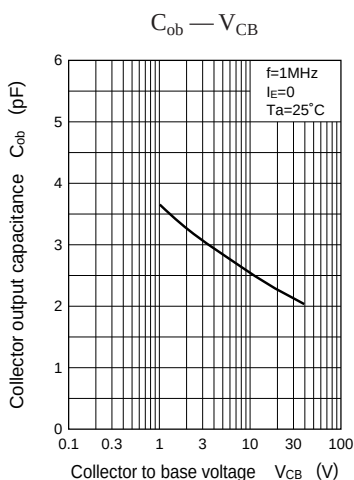




Characteristics charts of UN6210

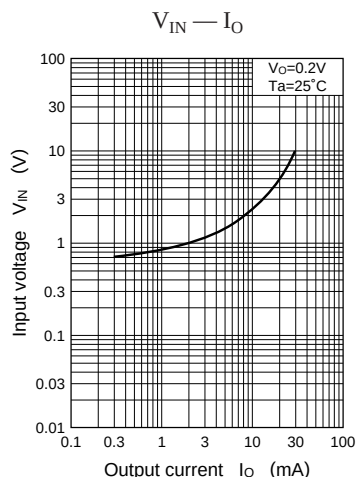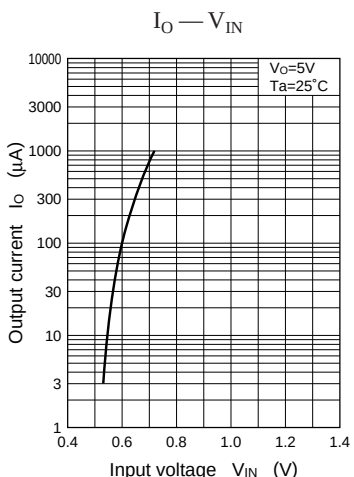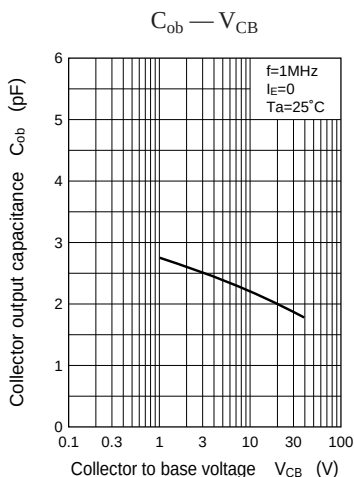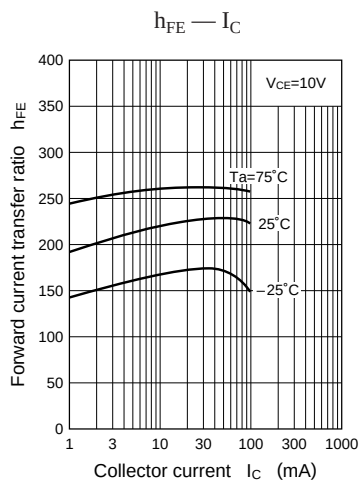
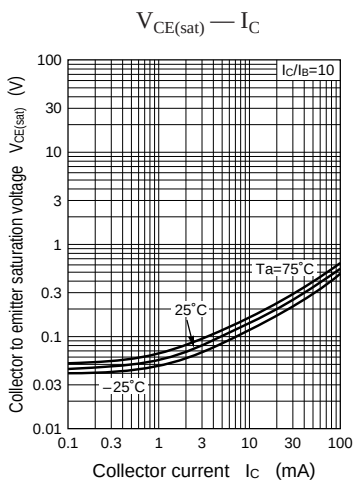
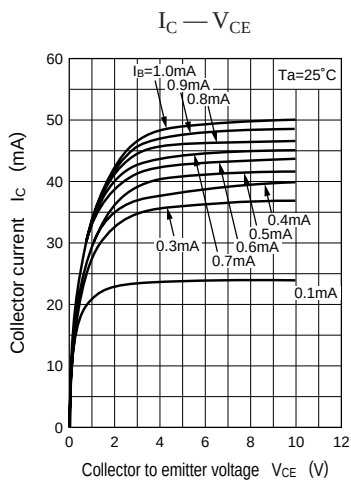


Characteristics charts of UN621D

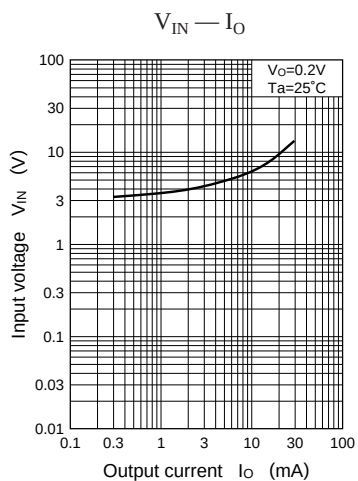
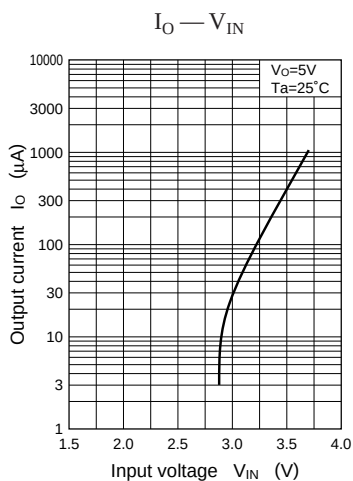
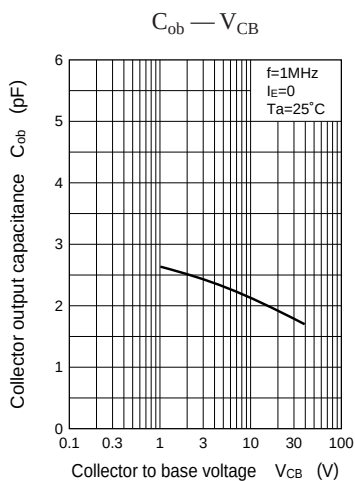
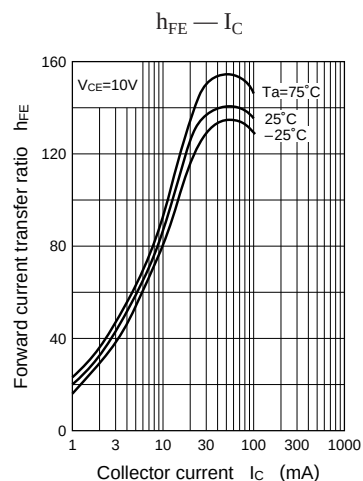
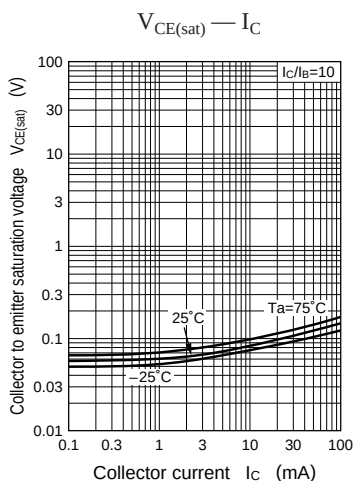
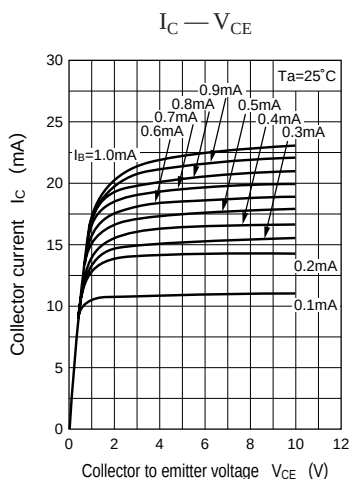


Characteristics charts of UN621E

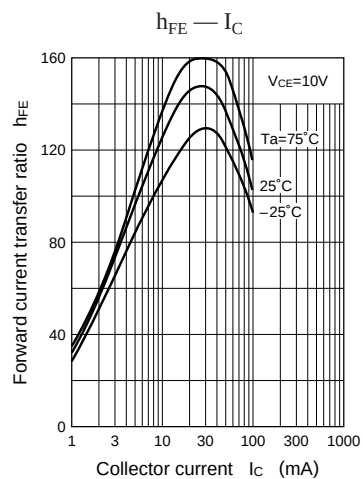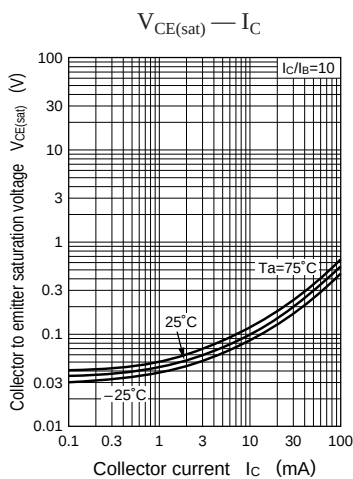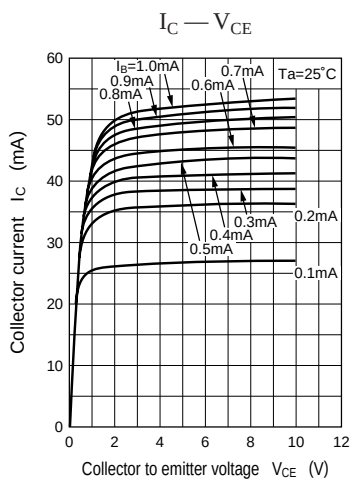


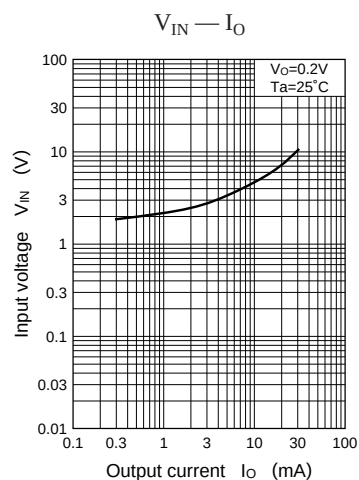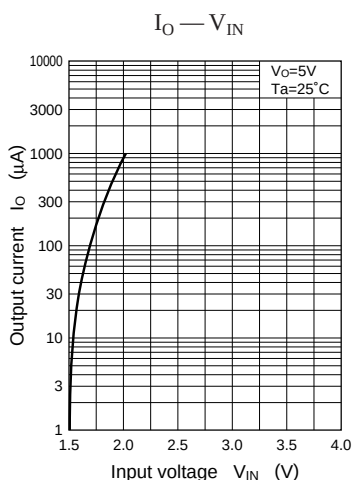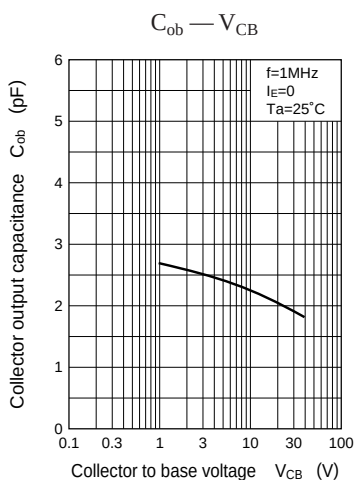

Characteristics charts of UN621F

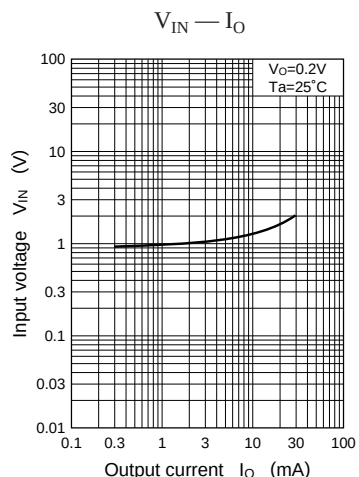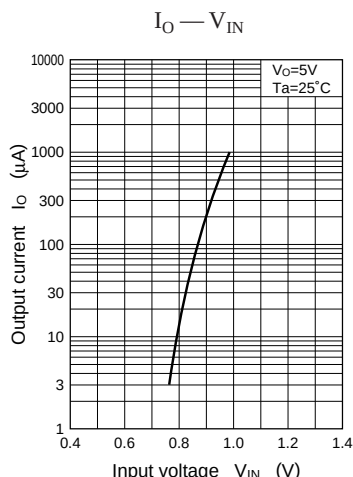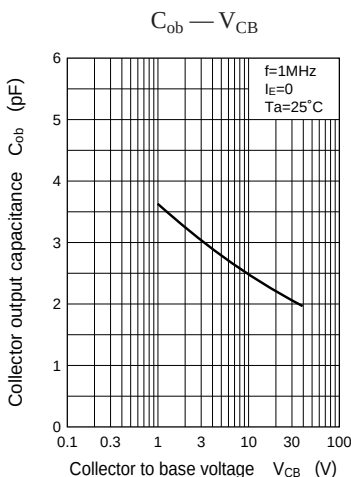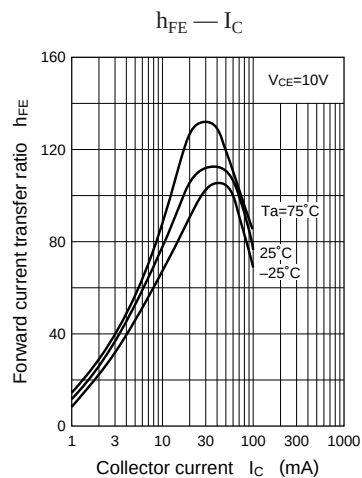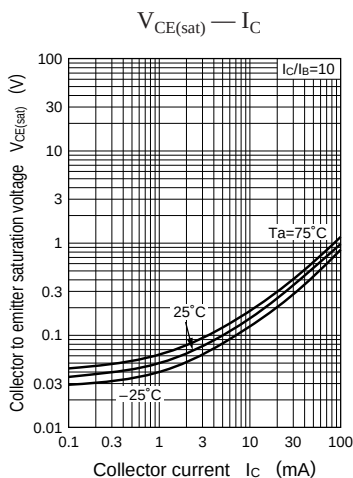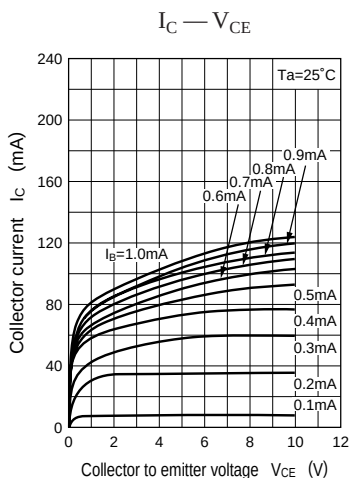

Characteristics charts of UN621K

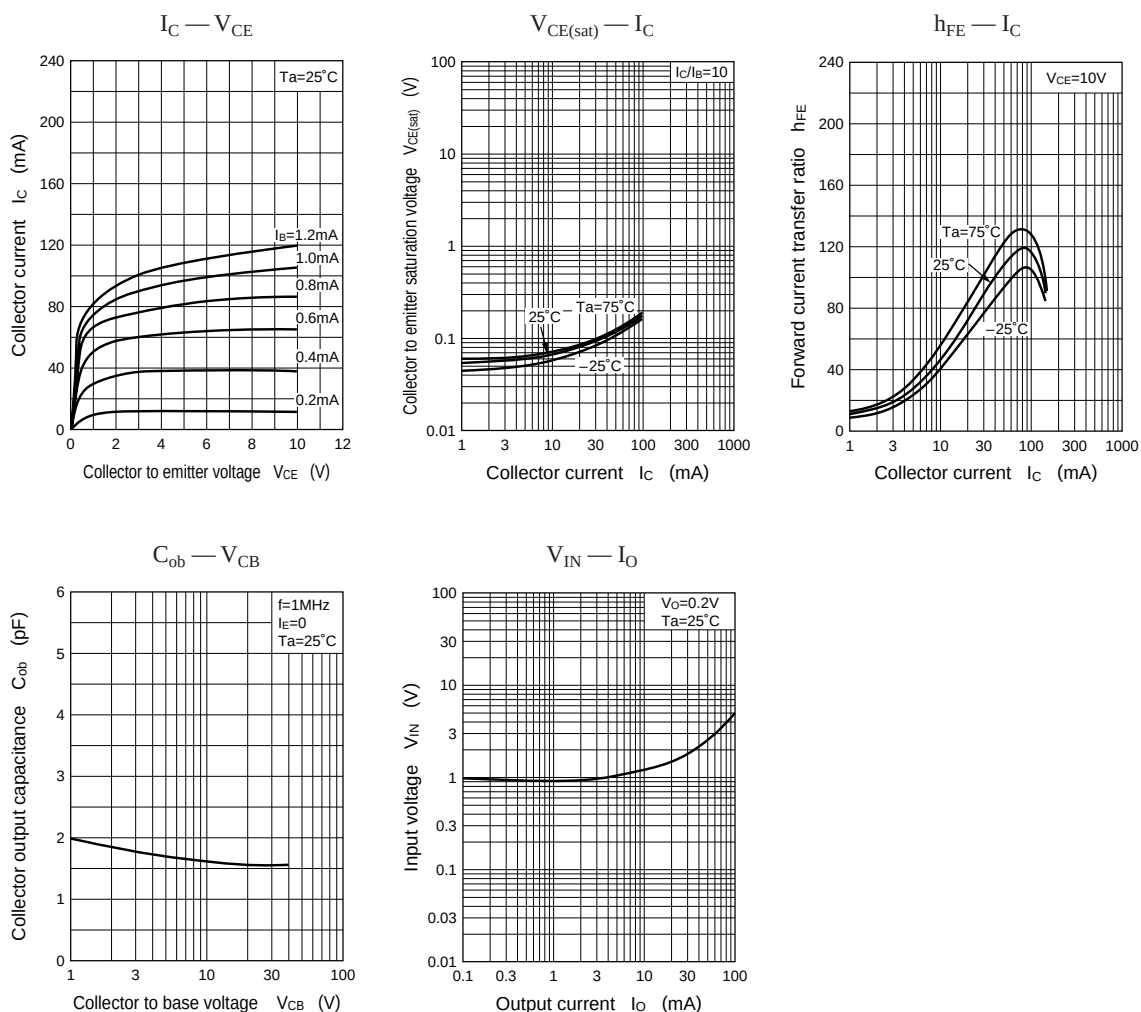

Characteristics charts of UN621L

