
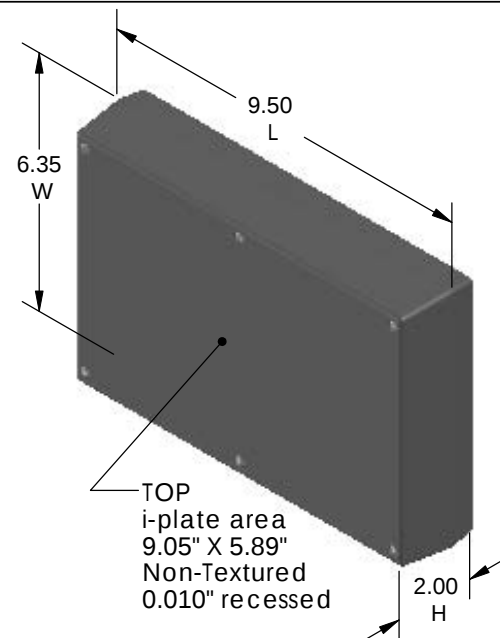


# SERPAC 192Ri (3D exploded)


Electronic Enclosures

-Click on image to show toolbar. Use  to Play/Pause Animation.  
-Left click and drag on image to move 3D model.

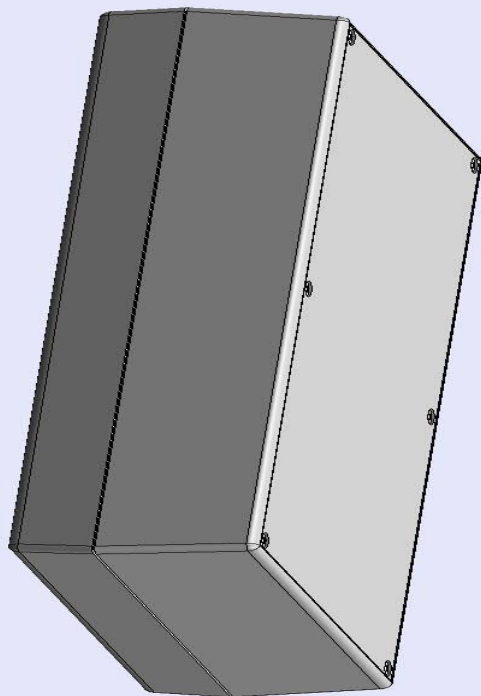

Threaded inserts only  
have to be assembled  
the first time.

Sealing gasket  
optional.  
note #2

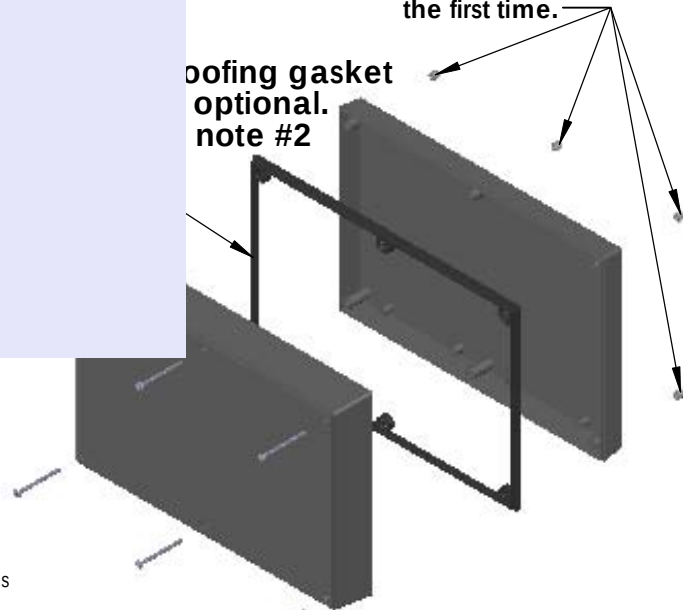

- a) Zoom in & out with center wheel.
- b) Pause at any moment to view and or print views.
- c) Change the views to ortho and section views if needed from the Views pull down menu.
- d) Explore options included in the tool bar like: Views, Transparency of model, Lighting type, etc.






| PART NO. | DESCRIPTION (Included) | ACCESSORIES (Optional) |                |
|----------|------------------------|------------------------|----------------|
| 9-2Ri    | TOP                    | PART NO.               | DESCRIPTION    |
| 19       | BOTTOM                 | PS19                   | Perimeter Seal |
| 6018     | 4-40 SCREW (6)         |                        |                |
| 6102     | THREADED INSERTS (6)   |                        |                |

Notes: Enclosure weight .69 lbs / 315 gm  
1) Enclosure meets or exceeds IP40 and NEMA 1  
2) When used with PS19 the enclosure meets or exceeds IP 66 and NEMA 4X, 12 and 13 MIL-STD-810G 506.5  
3) Circuit Board drawings can be download at:  
<http://www.serpac.com/Accessories/CircuitBoard/drawings/19X-CB.pdf>  
4) All components are RoHS Compliant.

ALL DIMENSIONS ARE  $\pm .010"$  7/29/10 (1 of 2)  
2009 Wright Ave. La Verne, CA 91750  
Ph. (626) 331-0517 Fx. (626) 331-8584 [serpac.com](http://serpac.com)

# SERPAC 192Ri (user print)

Electronic Enclosures

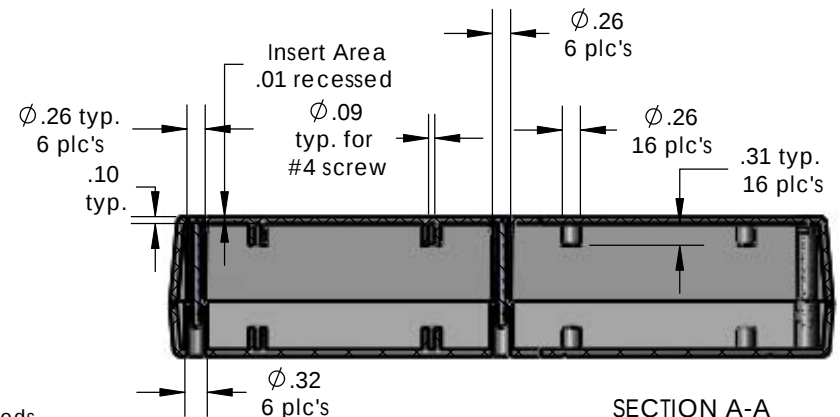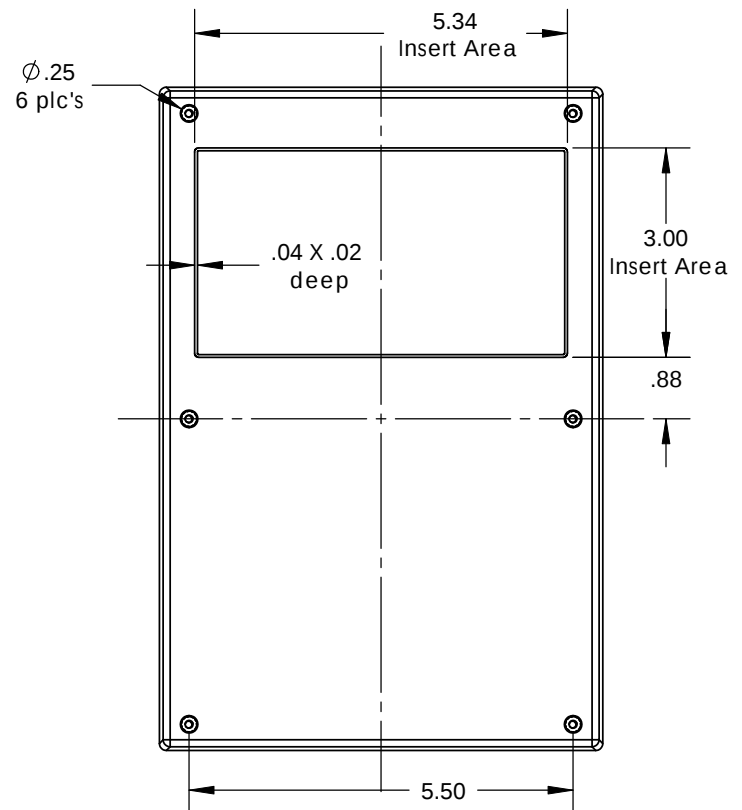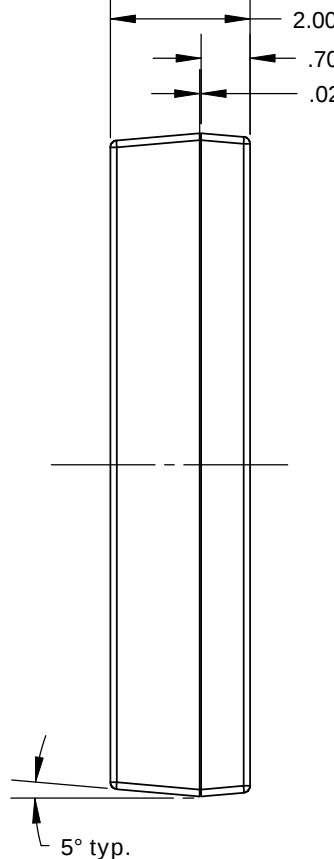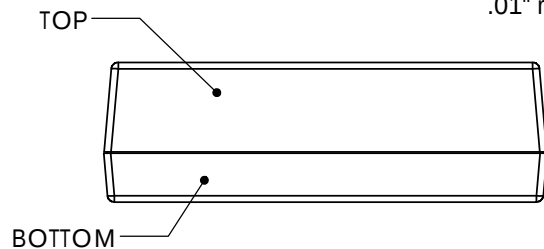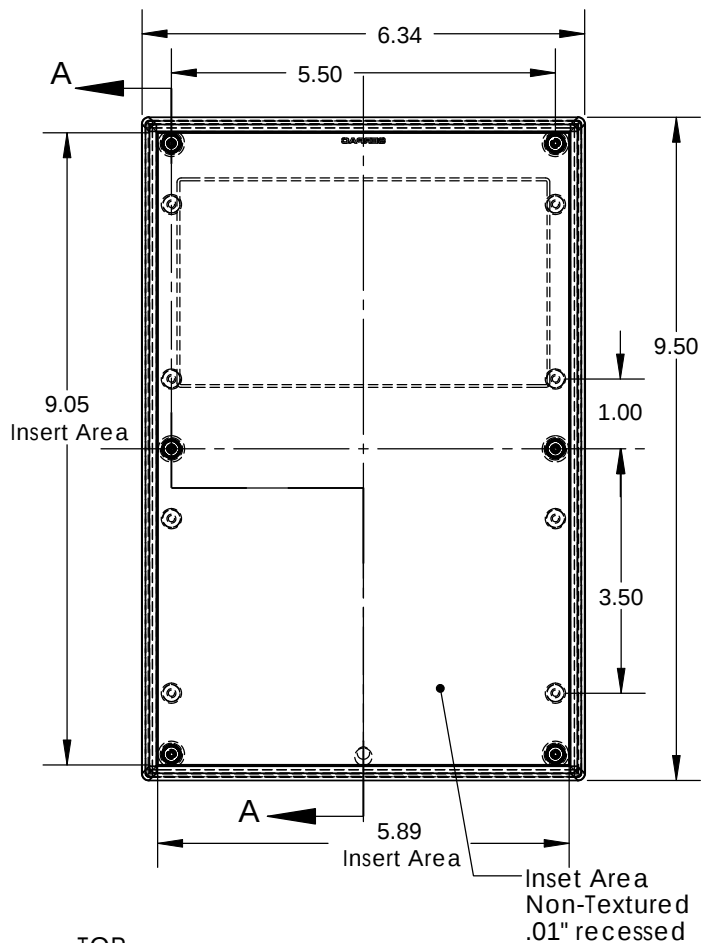

SECTION A-A  
SCALE 1 : 2.75

| PART NO. | DESCRIPTION (Included) | ACCESSORIES (Optional) |                |
|----------|------------------------|------------------------|----------------|
| 9-2Ri    | TOP                    | PART NO.               | DESCRIPTION    |
| 19       | BOTTOM                 | PS19                   | Perimeter Seal |
| 6018     | 4-40 SCREW (6)         |                        |                |
| 6102     | THREADED INSERTS (6)   |                        |                |

Notes: Enclosure weight .69 lbs / 315 gm  
 1) Enclosure meets or exceeds IP40 and NEMA 1  
 2) When used with PS19 the enclosure meets or exceeds IP 67 and NEMA 4X, 12 and 13 MIL-STD-810G 506.5  
 3) Circuit Board drawings can be download at:  
[http://www.serpac.com/Accessories/CircuitBoard/drawings/19X\\_CB.pdf](http://www.serpac.com/Accessories/CircuitBoard/drawings/19X_CB.pdf)  
 4) All components are RoHS Compliant.

ALL DIMENSIONS ARE ±.010" 7/29/10 (2 of 2)  
 2009 Wright Ave. La Verne, CA 91750  
 Ph. (626) 331-0517 Fx. (626) 331-8584 www.serpac.com