
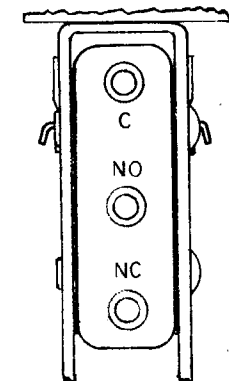


MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY - PUSHBUTTON SWITCH

CATALOG LISTING
17PB4-T

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

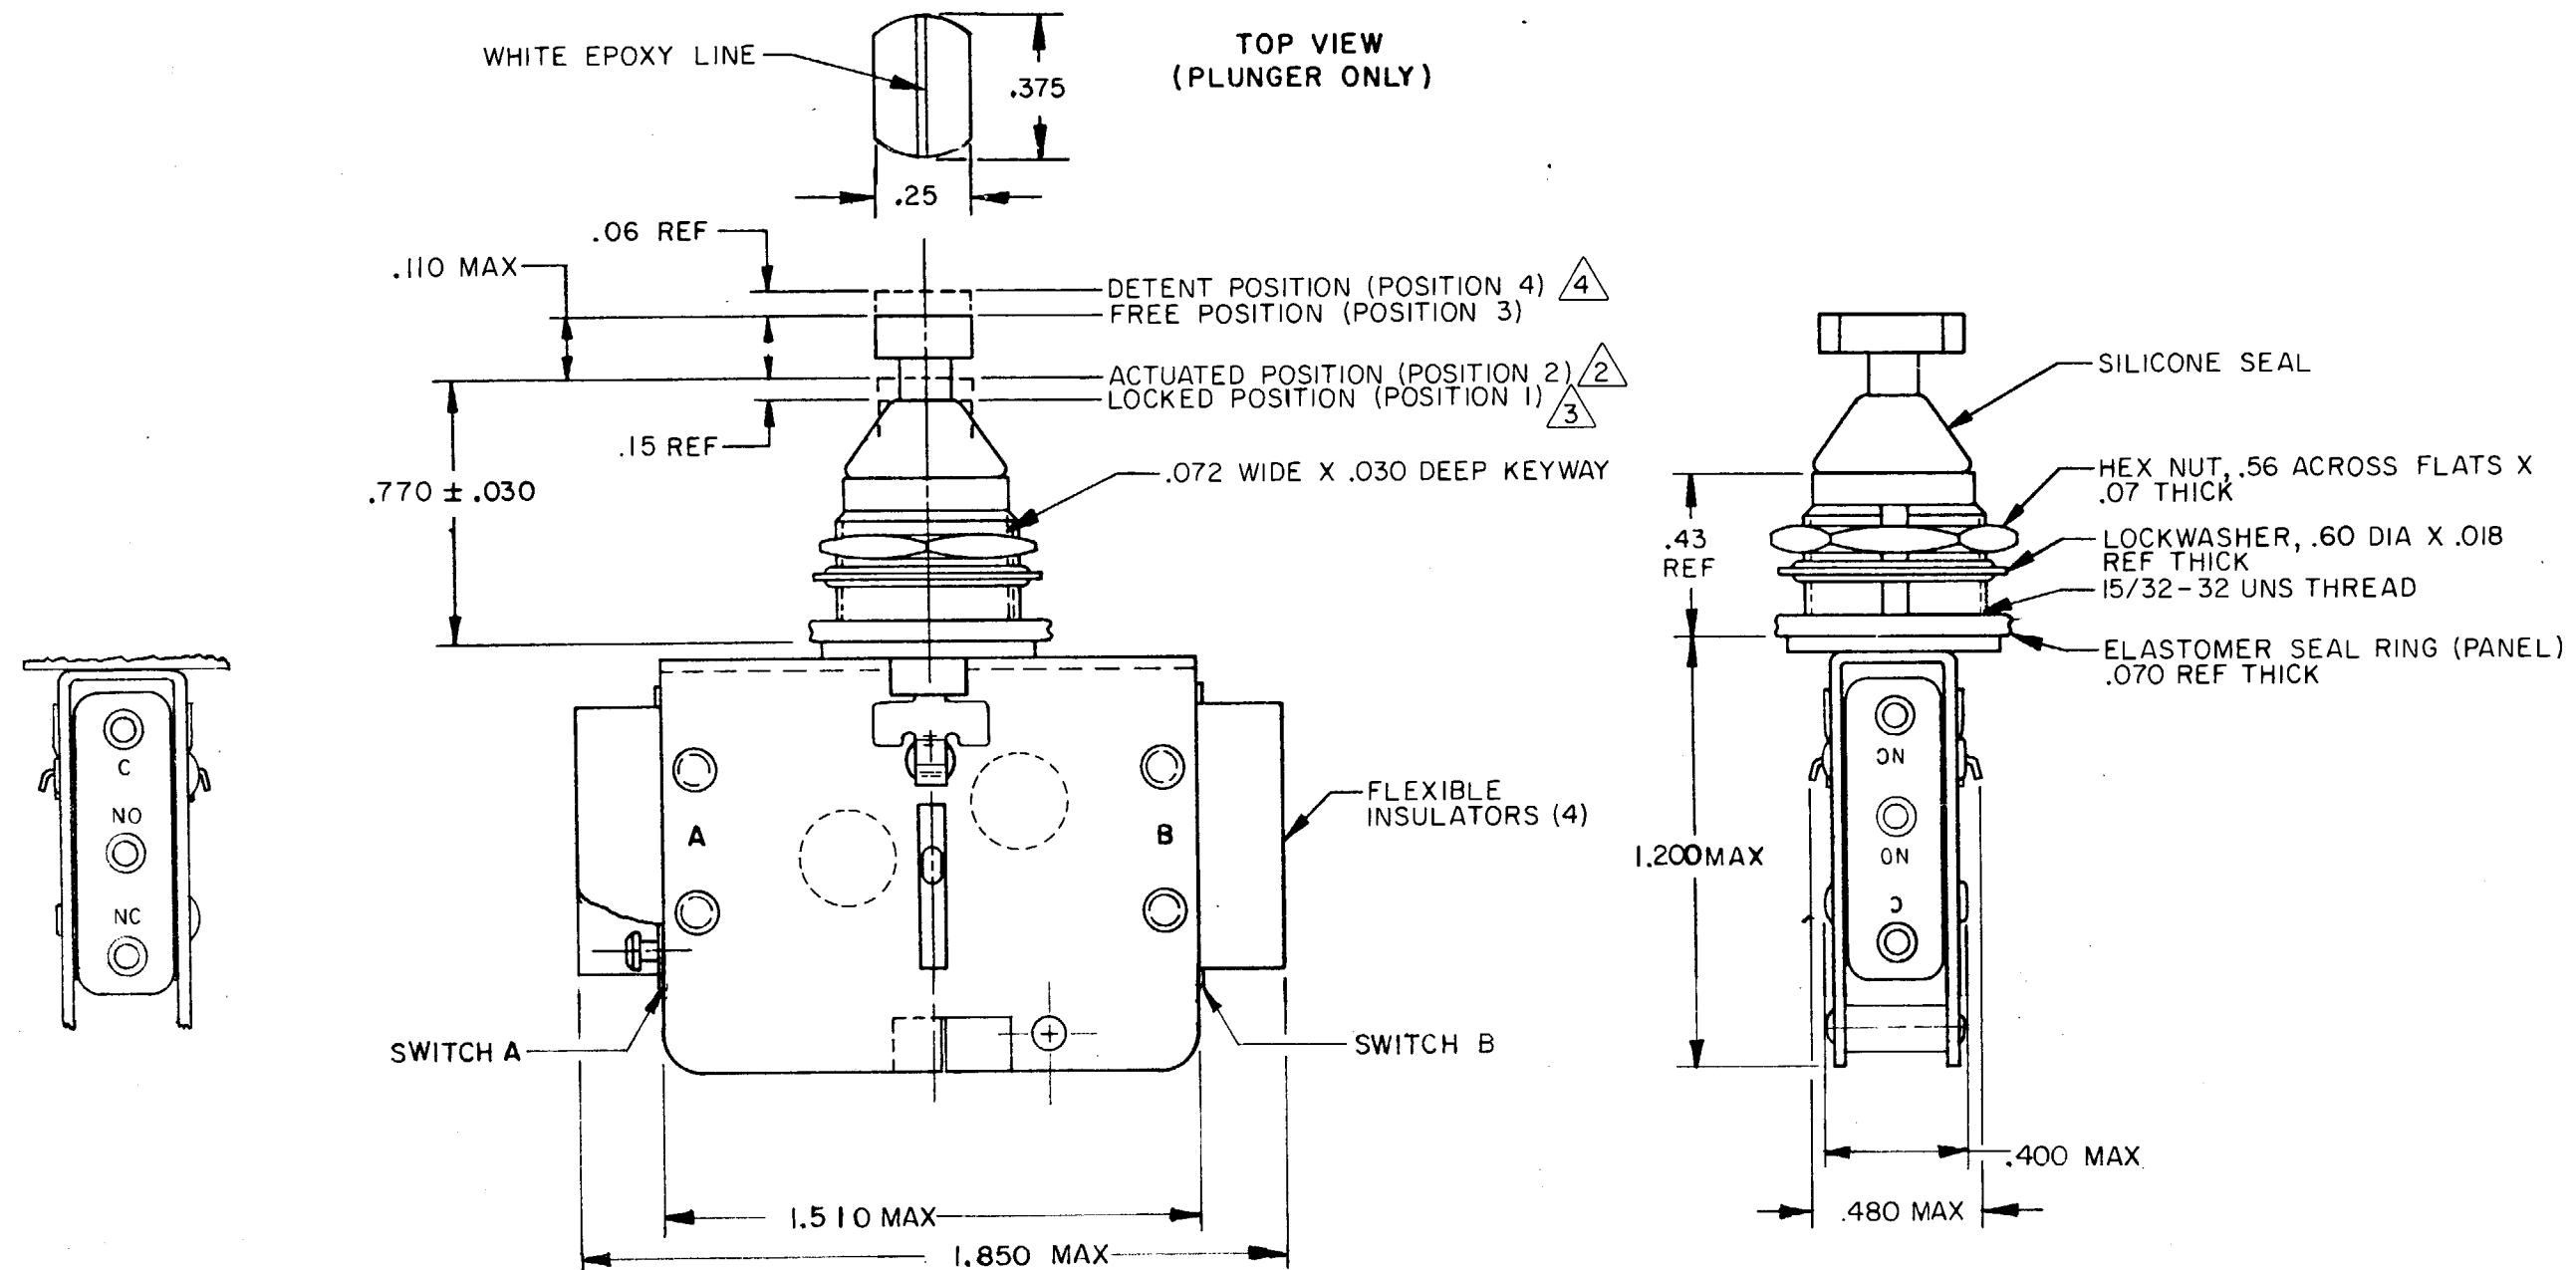

SWITCH POSITION AND CIRCUIT		CIRCUIT MADE	
POSITION	FUNCTION	SWITCH A	SWITCH B
4	PULL UP & LOCK	NC TO COM	NO TO COM
3	NORMAL OFF HOOK	NC TO COM	NC TO COM
2	NORMAL ON HOOK	NO TO COM	NC TO COM
1	DEPRESS & LOCK	NO TO COM	NC TO COM

- NOTES
- 1 - GOLD CONTACT - SM SWITCH (2)
 - 2 - OPERATE FORCE IN ACTUATED POSITION - 6 TO 10 OZ
 - 3 - TURN TO LOCK - 30° APPROX
 - 4 - OPERATING TORQUE IS 2-8 IN. OZ.
 - 4 - PULL TO DETENT FORCE - .5 TO 6 LBS

THIRD ANGLE PROJECTION

SCALE 2:1

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

DESIGN	TOL.	DESIGN	TOL.
NO PLACES	± .001	NO PLACES	± .001
ONE PLACE	± .002	ONE PLACE	± .002
TWO PLACES	± .005	TWO PLACES	± .005
THREE PLACES	± .010	THREE PLACES	± .010

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT 1.2 OZ APPROX

17PB4-T

M

DRAWING NUMBER

2

3

ISSUE

2

3

REVISIONS

A	ORDER	28 JUN 79
B	PR-10837-T	16 FEB 82
C	CO53691	16 AUG 83
D	CO53858	26 SEPT 83
E	CO67856	21 JUN 90

FO-52854-C

DRAWN

T M M 28 JUN 79

CHECK

19 JULY 79

REPLACES

RELEASE NO. PR-10837-T

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[17PB4-T](#)