





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

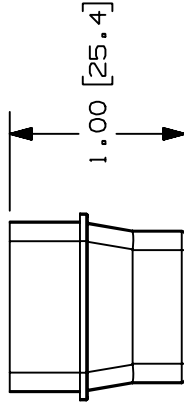

PANDUIT P/N	WEIGHT
RFX53-X	.061 LB/10 PCS. (27.5 G/10 PCS.)

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. FOR USE IN POWER CABLING APPLICATIONS UP TO 600V OR FOR CATEGORY 5, FIBER OPTIC AND OTHER LOW VOLTAGE APPLICATIONS REQUIRING TAMPER-RESISTANCE.
3. REDUCER FITTING IS USED TO REDUCE PANDUIT'S LD5 PROFILE FITTINGS TO PANDUIT'S LD3 PROFILE RACEWAYS.
4. DIMENSIONS IN PARENTHESIS ARE IN METRIC.

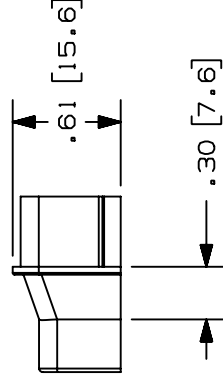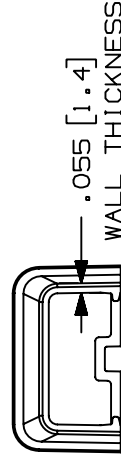

CAD FILENAME/LAYERS										D35541DB_RFX53_C_00A.PRT									
PANDUIT										CORP. TINLEY PARK, ILLINOIS									
REDUCER FITTING (RFX53-X)										CUSTOMER DRAWING									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XX) + (.XXX) ±.005(.3) (.XX) ±.010(.8) ANGLES ±										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.									
DRAWN BY										MAT'L:									
RABO										ABS/PC									
DATE										07-23-97									
CHK'D										HIW									
REV										DATE									
BY										CHK									
DESCRIPTION										ECN - R CUST SUP									
A. INCORRECT DRAWING NUMBER WAS CHANGED FROM 35541-54 TO 35541-68										35541-68 HIW HIW									
RELEASED TO PRODUCTION										35541-54 HIW HIW									
R 07-23-97 RABO HIW										R 07-23-97 RABO HIW									
A										35541-68									
Dwg										35541-68									
SIZE										A									