


SERIES 71 J and L Multi-Deck, Standard & Anti-Static

LOCK FEATURES

- Economical
- Standard or Anti-Static Style
- 5-Plates, 1-Sided Key


SWITCH FEATURES

- Economical
- 36° or 30° Throws
- Up to 16 Poles Per Switch
- 250 mA for 15,000 Cycles

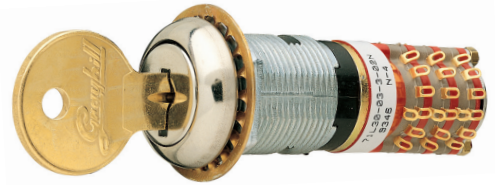



DIMENSIONS in inches (and millimeters)

Key slot shown in position 1.
Key to be inserted with cut
side down.

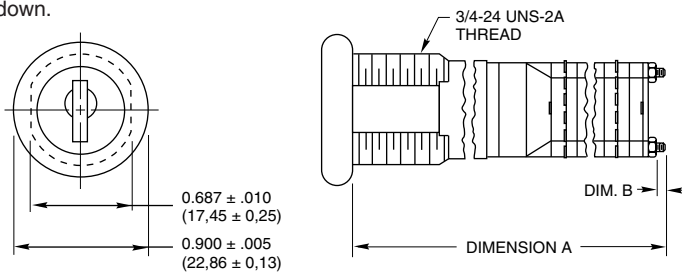

30°

36°




Note: Switch/key positions are not aligned with terminal positions.

Number of decks	1	2	3	4	5	6	7	8	9	10	11	12
Dim. A, Style J (In.)	2.441	2.659	2.877	3.095	3.313	3.811	4.029	4.247	4.465	4.683	4.901	5.119
Dim. A, Style L (In.)	1.811	2.029	2.247	2.465	2.683	3.181	3.399	3.617	3.835	4.053	4.271	4.489
Dim. B Style J & L (In.)	.031	.031	.031	.031	.031	.312	.312	.312	.312	.312	.312	.312
Dim. A, Style J (mm)	62,00	67,54	73,08	78,61	84,15	96,80	102,34	107,87	113,41	118,95	124,49	130,02
Dim. A, Style L (mm)	46,00	51,54	57,07	62,61	68,15	80,80	86,33	91,87	97,41	102,95	108,48	114,02
Dim. B Style J & L (mm)	0,79	0,79	0,79	0,79	0,79	7,92	7,92	7,92	7,92	7,92	7,92	7,92


For switch specifications and additional dimensions, see Standard Switch Pages.

Grayhill part number and date code marked on label.
Customer part number marked on request.

LOCK DETAIL

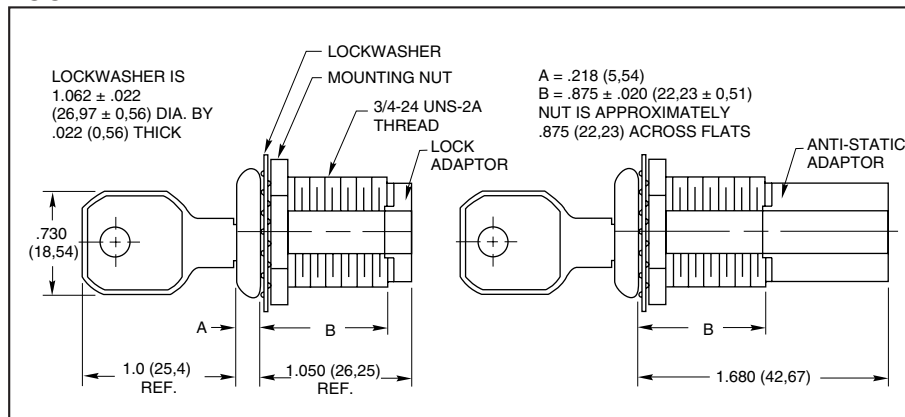

RECOMMENDED PANEL CUT

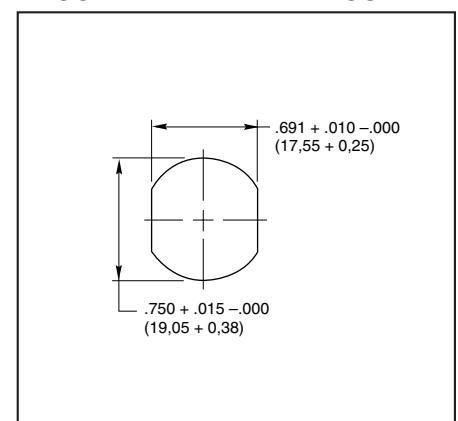

CHOICES

Style	Description	Angle of Throw	No. Of Decks	Poles/ Deck	Positions Per Pole	Shorting or Non-Shrtg.
Series 71 Switches						
L J	Standard, Solder Lugs Anti-static, Solder Lugs	30°	01 to 12	1	02 to 12*	N or S
			01 to 08	2	02 to 06	N or S
			01 to 05	3	02 to 03	N or S
			01 to 04	4	02 to 03	N or S
			01 to 03	5	02	N or S
			01 or 02	6	02	N or S
		36°	01 to 12	1	02 to 10*	N or S
			01 to 08	2	02 to 05	N or S

*For single pole switches with maximum positions, specify continuous rotation or fixed stop when ordering.

LOCK SPECIFICATIONS

Mounting: By bushing, nut and lockwasher

Static Voltages: Anti-static style withstands 15,000 Vdc

Keying: All locks have identical keys unless specially ordered otherwise

Key Removal

30° Throw: Position 1 and 180°

Special key removal: Every 90°

36° Throw: All positions

Special key removal: Position 1 only

Orientation of Keylock Switch: Bushing flats are on both sides of the mounting thread with the key upright in the first position with cut side down.

LOCK MATERIALS & FINISHES


Keys: Brass; 2 supplied

Lock Bezel: Stainless steel

Lock Barrel & Plug: Zinc treated with chromate

Lock Adaptor/Extension: Thermoplastic

ORDERING INFORMATION

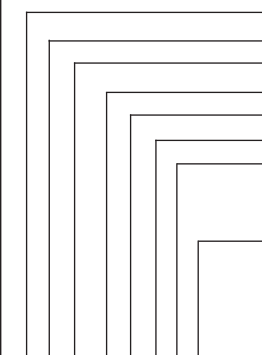	Series Style Letter: L for standard; J for anti-static Angle of Throw: 30 or 36 Number of Decks: 01 thru 12 (per Choices chart) Poles per Deck: 1 thru 6 (per Choices chart) Positions per Pole: 02 thru 12 (per Choices chart) Type of Contacts: N = Non-shorting S = Shorting Stop Arrangement Suffix: (needed only for 1-pole switches with maximum positions) F = Fixed stop between last and first positions *Leave blank for continuous rotation
71 L 30-03-1-12N-F	

STANDARD SWITCH PAGES

For additional switch dimensions, ratings, circuitry, and specifications, see Series 71 datasheet.

Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Grayhill:

[71J1103](#) [71L36-02-2-03N](#) [71L36-02A10N](#) [71L30-04-4-02N](#) [71L36-11-1-02N](#) [71L30-03-2-02N](#) [71L30-01-6-02N](#)
[71L30-03-2-06N](#) [71L36-02-1-09N](#) [71L36-03B10S](#) [71L30-01-1-11N](#) [71L36-03-1-08N](#) [71L36-05-1-03N](#) [71L36-01-1-08N](#) [71J36-01-1-03N](#) [71J36-04-1-02N](#) [71L30-01-3-02N](#) [71L30-06-1-04N](#) [71J30-03-1-05N](#) [71L30-08-2-02N](#) [71L30-03-1-02N](#) [71L36-03-2-03N](#) [71L30-01-1-08N](#) [71L30-03-2-05N](#) [71L30-02-4-02N](#) [71L30-01-2-04N](#) [71J36-03-2-02N](#)
[71L36-02-1-03S](#) [71L36-06-1-02N](#) [71J30-06-2-06N](#) [71J30-08-2-06N](#) [71J36-01-2-04N](#) [71L30-01-1-05N](#) [71L36-01-1-02N](#) [71L36-01-1-05N](#) [71J36-02-2-02S](#) [71L36-01-2-05S](#) [71L36-03-1-05N](#) [71J36-08-2-03N](#) [71L36-03-1-06N](#) [71L36-01-2-03S](#) [71J30-01-4-03S](#) [71L30-01-1-02N](#) [71J36-04-2-03N](#) [71L30-03-5-02N](#) [71L36-02-2-05S](#) [71L30-02-1-04N](#) [71J36-02-2-04N](#) [71L30-01-4-02N](#) [71L30-01-1-10N](#) [71J36-03-2-05N](#) [71L36-02-2-02S](#) [71J30-01-4-02N](#) [71L30-01-1-04N](#) [71L36-01-1-07N](#) [71L36-02-2-04N](#) [71L36-03-1-04N](#) [71L30-03-1-08N](#) [71L36-02-1-08N](#) [71L36-04-1-02N](#) [71L36-01-2-05N](#) [71J30-02-6-02N](#) [71L36-02B10S](#) [71L30-01-2-03S](#) [71L30-02-2-03N](#) [71L36-01-2-03N](#) [71J36-01-1-06N](#) [71J36-01-2-03S](#) [71L30-02-2-04N](#) [71L30-04-1-06N](#) [71L30-03-4-03N](#) [71L36-05-1-02N](#) [71L30-02-2-06S](#) [71L30-02-6-02N](#) [71L36-03-2-02S](#) [71L30-05-2-05N](#) [71L30-01-3-03N](#) [71L36-01B10S](#) [71J36-03-1-05N](#) [71L30-12-1-02N](#) [71L30-04-3-03N](#) [71J36-01-1-02S](#) [71L30-01-5-02N](#) [71L36-03-1-07S](#) [71J36-02-2-02N](#) [71L30-02-1-03N](#) [71L36-05-1-05N](#) [71L36-02-1-03N](#) [71J36-02-2-03S](#) [71J30-04-3-02N](#) [71J30-01-1-02N](#) [71L36-01-1-04N](#) [71J36-01-1-05S](#) [71J36-04-2-02N](#) [71L30-03B12N](#) [71L36-02-1-06N](#) [71L36-01B10N](#) [71L30-01-2-06N](#) [71L30-04-1-04N](#) [71L36-03-2-05N](#)