



- **New compact design incorporating our latest RCD technology**
- **Robustly constructed to withstand arduous conditions**
- **Added protection against the risk of electrocution.**
- **Suitable for use with portable appliances and electrical household equipment.**
- **Unit trips on power supply failure, so preventing unexpected start up of dangerous equipment.**
- **Easy to operate and test.**
- **Double pole, simply wires as a standard three pin plug.**
- **Easy to wire, with same length cables.**
- **Fits a standard 13amp BS1363 socket outlet.**
- **Available in black and grey.**

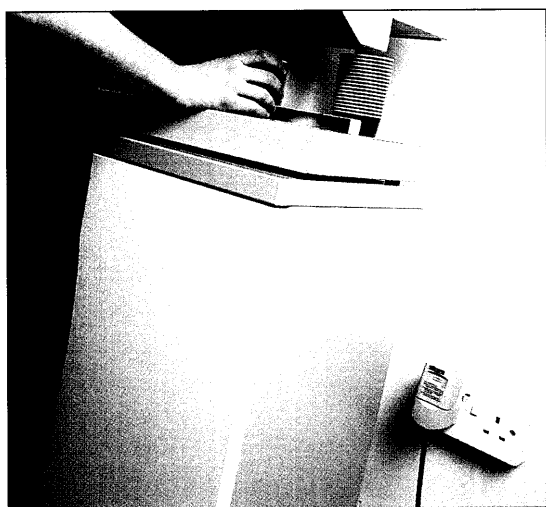

Provides added protection, particularly where electricity and water are present.

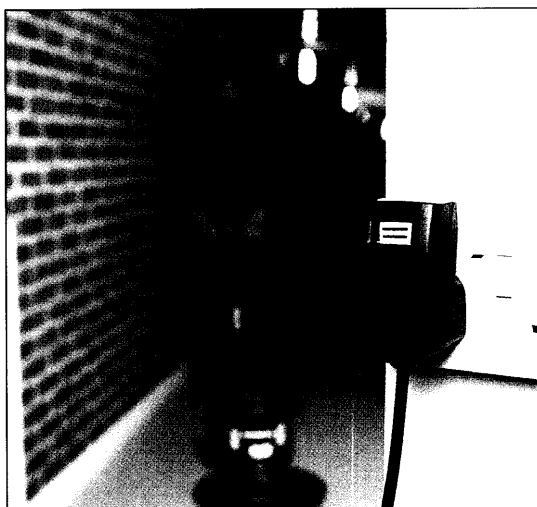


For use in commercial and industrial applications, where Health & Safety requirements must be met.

TECHNICAL INFORMATION

Voltage	230V-240V, 50Hz
Current rating	13A (Max)
Rated trip current	30mA
Fuse (fitted)	13A
Trip speed	40ms (11ms typical)
RCD contact break	Double pole
Electrically latched	
Automatic dropout on loss of supply voltage	
Single test and reset button	
Suitable for both 3 and 2 wire appliances	
Cable capacity	3 x 1.5mm ²
Cable sheath diameter	10mm (Max)
Weight	140g
CE approval	

DIMENSIONS

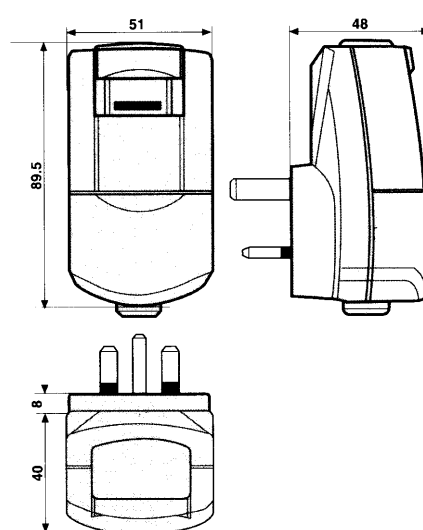

PowerBreaker

FEATURES

698283

BENEFITS

Large single test/reset button located on top of the unit

Easily accessible and simple to operate

Large, clear indicator window

Clear identification of 'status' of device – even at distance

Clear user instructions on front of device

Instructions are always readily available

Integral grommet

Ease of wiring

Fuse accessible from rear

No need to remove cover to replace fuse

Independently tested

Increased security of reliability

Fast tripping time

Reduces risk

HOW RCDs WORK

A PowerBreaker RCD works by monitoring the current in the live and neutral wires feeding your appliance. An imbalance such as that caused by a leakage to earth or by someone touching a live part, which could cause electrocution, will cause the unit to cut off the power within a fraction of a second (before human life is threatened).



**For further
information on
our full range
of RCD products
and your nearest
stockist, call our
Customer Service
Centre on:
01279 641 800**

PowerBreaker™



Templefields, South Road,
Harlow, Essex CM20 2BG
Tel: (01279) 641 800
Fax: (01279) 635 285