


Negative Regulator



Description

This 3-terminal regulator is available with fixed output voltages of -15V. The TO-220 power package and is capable of supplying 1.5A of output current.


This regulator employs internal current limiting safe area protection and thermal shutdown for protection against virtually all overload conditions.

Specifications:

Primary Input Voltage	: -20V
Output Voltage Fixed	: -15V
No. of Pins	: 3
No. of Output	: 1
Output Current	: 40mA
Operating Temperature	: 0°C to +70°C
Current Rating	: 0.1A

Connection Diagram

TO-220 Package

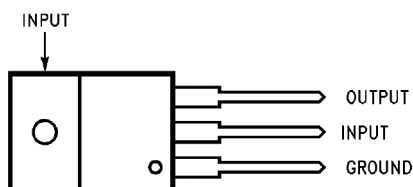

Front View

Part Number Table

Description	Part Number
IC, Negative Volt Regulator, -15V, TO-220	79L15

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.