

Phytion™

Device Programmers and Development Tools for Microcontrollers

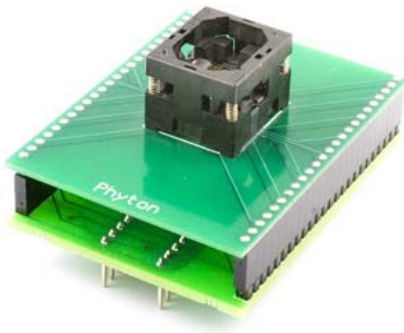
[Home](#)[Products](#)[E-Shop](#)[Support](#)[Contact](#)[News](#)[Site Map](#)

Quick Links
[Help Desk](#)
[Downloads](#)
[All Programmers](#)
[Device Search](#)
[Tools Catalogs](#)

Shopping Cart
Items: 0
Total: \$0.00

[Your Account](#)

Products
[Development Tools](#)
[ARM](#)
[8051](#)
[Other](#)
[Device programmers](#)
[All Models](#)
[Universal](#)
[In-System](#)
[Gang](#)
[Adapters](#)
[Custom made tools](#)
[OEM tools](#)

AE-B88-NM1
DIP40/BGA88 specialized adapter for FLASH memory.


Description:
DIP40/BGA88 specialized adapter for FLASH memory. Device package dimensions: 11.0 x 8.0 x 1.2(1.0) mm, 0.8 mm pitch.

Supported Devices:
Click the device programmer model below to get an appropriate list of the devices supported by this programmer with this adapter:

- [ChipProg-48](#)
- [ChipProg-G4](#)
- [ChipProg-40](#)
- [ChipProg+](#)

[Adapter wiring diagram](#)

Adapter Connection Table:

DIP -40	BGA-64	U1, 74AHC573	U2, 74AHC573	C1, 150pF	C2, 0.1uF
1	L3,K7,J8				
2	G8				
3		11	11	1	
4	F4				
5	D3				
6					
7	F5				
8	G7				
9	D4				
10	E2				
11	F2				
12	C1				
13	B1				
14	D1				
15	E1				
16	F1				
17	G1				
18					
19	H8				
20	L1,L2,L5,L6,L7,L8,B4,C4,E5,C6	1, 10	1, 10	2	2
21	K1				
22	J2				
23	H2	2			
24	G2		2		
25	H3	3			
26	J3		3		
27	G3	4			
28	G4		4		
29	H4	5			
30	J4		5		

	31	J5	6		
	32	H5		6	
	33	G5	7		
	34	G6		7	
	35	J6	8		
	36	H6		8	
	37	H7	9		
	38	J7		9	
	39				
	40	L4,B5,B6,K6,E4	20	20	1
		C3		12	
		C7		13	
		E8	12		
		F7	13		
		D8	14		
		C8	15		
		B8	16		
		E7	17		
		D7	18		
		F6	19		
		B3		16	
		E6		15	
		B7		14	
		B2		17	
		D2		18	
		F8		19	