

1

2

3

4

5

6

7

8

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 507)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: PHOSPHOR BRONZE(SIGNAL CONTACT)

BRASS (POWERS CONTACT)

-ACCESSORIES: BRASS

-SHELLS: STEEL

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A (SIGNAL CONTACT)

30A or 40A (POWER CONTACT)

-CONTACT RESISTANCE: <=7.3 m Ohms(SIGNAL and POWER)

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/21

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 21 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum

- Female screw : 0.5 N.m minimum

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in GS-22-008.

- The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board. See application notes/procedures if they are available.

- Termination plating spec:

- Signal contacts: Ni + Gold

- Power contacts: Ni 1.27µm+Sn 2.5 to 7.5µ,pure bright

- Active area plating spec:

- Signal and power contacts: Ni + Gold

- Shell plating :2 to 4µm Cu + nickel + 3 to 10µmm Sn,pure bright

- Accessories: Sn pure bright + nickel

- Packaging spec: See GS-14-920

Series

Shell size: E A B C D (see sheet 3)

Front accessory definition (see sheet 2)

blank:without accessory

L :threaded insert M3

O :threaded insert UNC 4-40

V :female screw UNC 4-40

Layout of contacts (see sheet 3)

Contacts

S :Socket

Termination type

5 Right angle/Europe standard

Plating

00 200 matings/unmatings

43 500 matings/unmatings

PCB accessories definition(see sheet 2)

A :without accessory

H :Metal brackets+harpoons for PCB 2.40mm

G :Metal brackets+harpoons for PCB 1.60mm

M :Metal brackets

Power contacts

00 :Not fitted with power contact (signal contacts always fitted)

30 :Fitted with power contacts 30 Amp.

40 :Fitted with power contacts 40 Amp.

DBL13W3S500G30LF

See note RoHS

TABLE 1:PCB HOLE DIAMETERS

POWER CONTACTS			ACCESSORIES	SIGNAL CONTACT
30 A	2.00	Ø2.40	Ø3.10	Ø0.9 min
40 A	2.80	Ø3.10		
Max current power	ØA ^{+0.1} ₀	PCB HOLE ±0.1	PCB HOLE ±0.1	PCB HOLE

Dr M PESSON 2005-10-11

Eng P LEGARE 2005-10-11

Chr

Appr

rev	ecn no	dr	date
A	LS05-0101	MPE	2005-10-11
B	LS06-0208	LGO	2006-12-12
C	LS07-0273	MPE	2007/10/31
D	F09-0092	LSA	2009/09/16
E	F10-0060	LSA	2010/06/01
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 - ✓

tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection

mm

ANGULAR

LINEAR

0° ±2°

0.X ±0.3

0.XX ±0.1

0.XXX ±0.05

size A2

Scale 2:1

ECN F10-0060

Product family

- Spec ref

FCI

title SUB FEMALE DMW EUROPE

mixed power right angled solder

catalog no

dwg no C01-8639-2300

Rev. E


sheet 1 of 7

13W3 FOR EXAMPLE

Ø A

Copyright FCI.

PDM: Rev:E STATUSReleased Printed: Oct 01, 2010

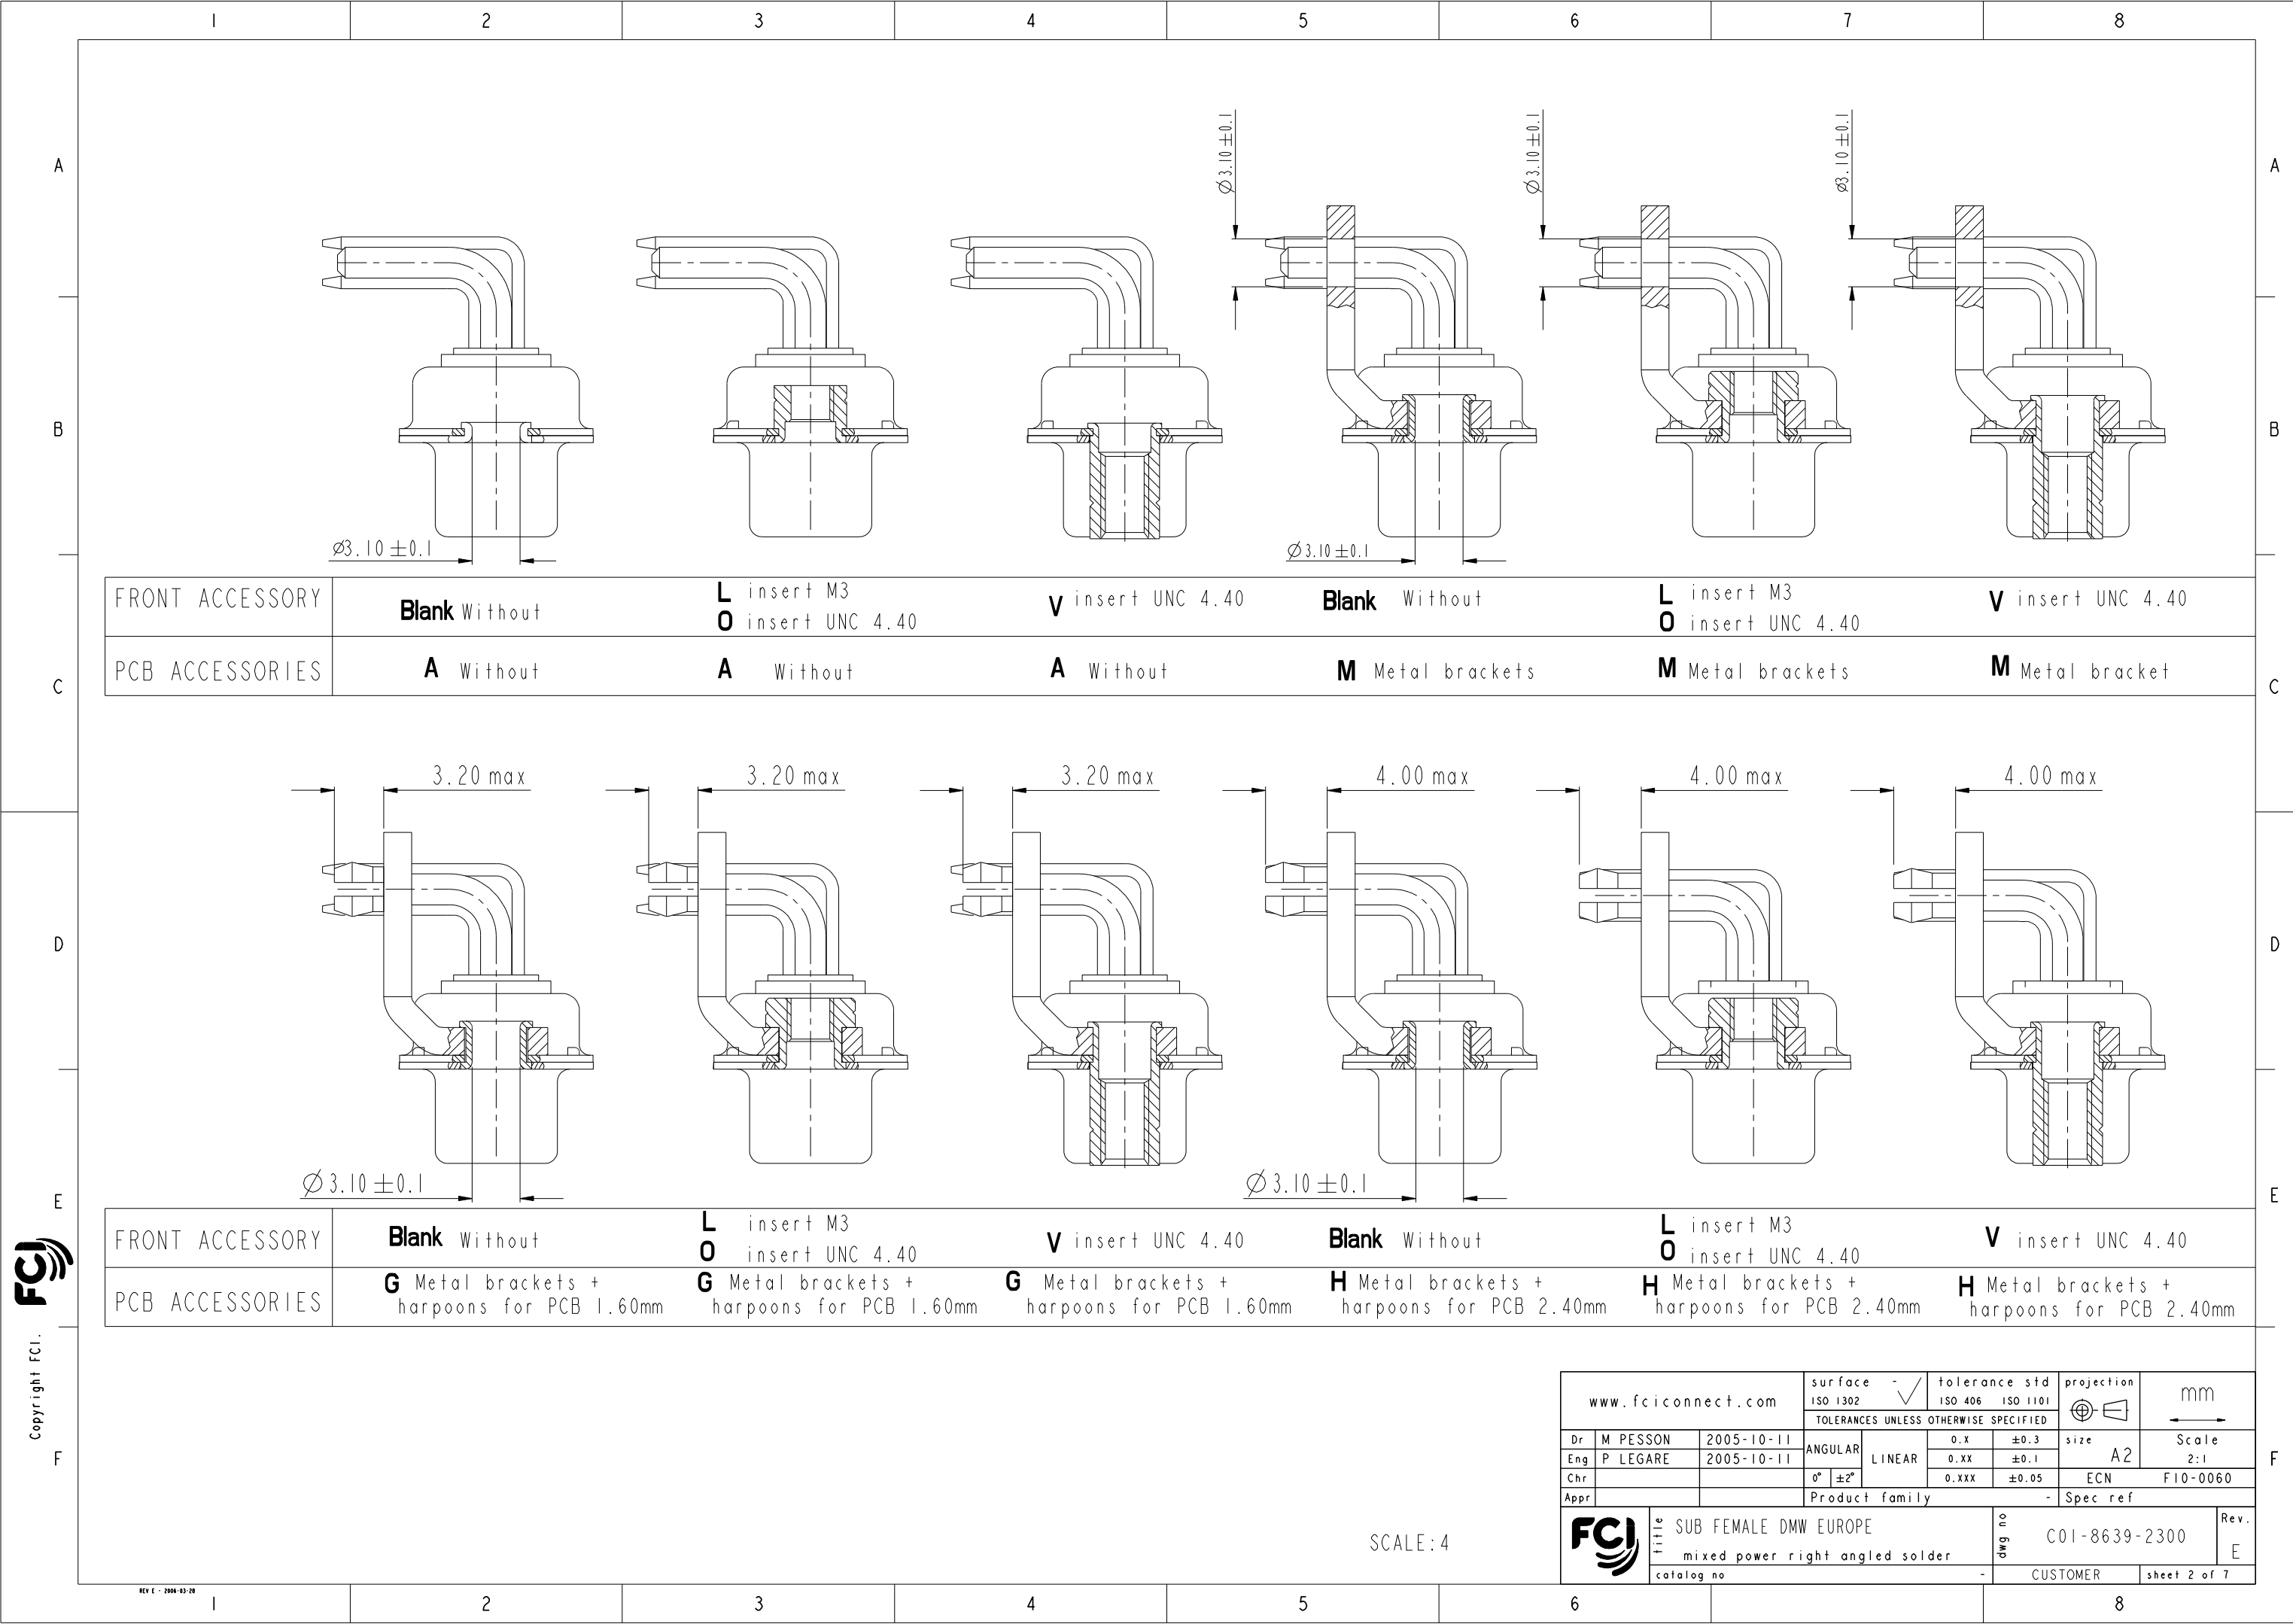

FRONT ACCESSORY	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40
PCB ACCESSORIES	A Without	A Without	A Without	M Metal brackets	M Metal brackets	M Metal bracket

FRONT ACCESSORY	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40
PCB ACCESSORIES	G Metal brackets + harpoons for PCB 1.60mm	G Metal brackets + harpoons for PCB 1.60mm	G Metal brackets + harpoons for PCB 1.60mm	H Metal brackets + harpoons for PCB 2.40mm	H Metal brackets + harpoons for PCB 2.40mm	H Metal brackets + harpoons for PCB 2.40mm

www.fciconnect.com			surface - ✓ ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1			
Eng	P LEGARE	2005-10-11			0.XX	±0.1					
Chr					0.XXX	±0.05					
Appr			Product family					ECN		F10-0060	
								- Spec ref			
			title			SUB FEMALE DMW EUROPE			Rev.		
			mixed power right angled solder			dwg no			C01-8639-2300		
			catalog no			-			CUSTOMER		
									sheet 2 of 7		

FCI
Copyright FCI.

REV E - 2006-03-28

SCALE: 4

I		2		3		4		5		6		7		8																																																																																								
A	<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS500A30LF</td><td>30</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A30LF</td><td>30</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A30LF	30	200	without	without	D*LxWxS500A30LF	30	200	insert M3	without	D*OxWxS500A30LF	30	200	insert UNC 4.40	without	D*VxWxS500A30LF	30	200	female screw UNC 4.40	without	D*xWxS500H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm	B	<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS500G30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS500G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M30LF	30	200	without	metal bracket	D*LxWxS500M30LF	30	200	insert M3	metal bracket	D*OxWxS500M30LF	30	200	insert UNC 4.40	metal bracket	D*VxWxS500M30LF	30	200	female screw UNC 4.40	metal bracket	C
	PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																	
	D*xWxS500A30LF	30	200	without	without																																																																																																	
	D*LxWxS500A30LF	30	200	insert M3	without																																																																																																	
	D*OxWxS500A30LF	30	200	insert UNC 4.40	without																																																																																																	
	D*VxWxS500A30LF	30	200	female screw UNC 4.40	without																																																																																																	
	D*xWxS500H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																	
	D*LxWxS500H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																	
	D*OxWxS500H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																	
	D*VxWxS500H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																	
D*xWxS500G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS500G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS500G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS500G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS500M30LF	30	200	without	metal bracket																																																																																																		
D*LxWxS500M30LF	30	200	insert M3	metal bracket																																																																																																		
D*OxWxS500M30LF	30	200	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS500M30LF	30	200	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS500A40LF</td><td>40</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A40LF</td><td>40</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A40LF	40	200	without	without	D*LxWxS500A40LF	40	200	insert M3	without	D*OxWxS500A40LF	40	200	insert UNC 4.40	without	D*VxWxS500A40LF	40	200	female screw UNC 4.40	without	D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm	D																																															
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*xWxS500A40LF	40	200	without	without																																																																																																		
D*LxWxS500A40LF	40	200	insert M3	without																																																																																																		
D*OxWxS500A40LF	40	200	insert UNC 4.40	without																																																																																																		
D*VxWxS500A40LF	40	200	female screw UNC 4.40	without																																																																																																		
D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS500G40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M40LF	40	200	without	metal bracket	D*LxWxS500M40LF	40	200	insert M3	metal bracket	D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket	D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket																																																										
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS500M40LF	40	200	without	metal bracket																																																																																																		
D*LxWxS500M40LF	40	200	insert M3	metal bracket																																																																																																		
D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS543A30LF</td><td>30</td><td>500</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS543A30LF</td><td>30</td><td>500</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS543A30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS543A30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS543H30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS543H30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS543H30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS543H30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS543G30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS543A30LF	30	500	without	without	D*LxWxS543A30LF	30	500	insert M3	without	D*OxWxS543A30LF	30	500	insert UNC 4.40	without	D*VxWxS543A30LF	30	500	female screw UNC 4.40	without	D*xWxS543H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS543H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS543H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS543H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS543G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm	E																																															
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*xWxS543A30LF	30	500	without	without																																																																																																		
D*LxWxS543A30LF	30	500	insert M3	without																																																																																																		
D*OxWxS543A30LF	30	500	insert UNC 4.40	without																																																																																																		
D*VxWxS543A30LF	30	500	female screw UNC 4.40	without																																																																																																		
D*xWxS543H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*LxWxS543H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*OxWxS543H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*VxWxS543H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*xWxS543G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS543G30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS543G30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS543G30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS543M30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS543M30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS543M30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS543M30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS543G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS543G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS543G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS543M30LF	30	500	without	metal bracket	D*LxWxS543M30LF	30	500	insert M3	metal bracket	D*OxWxS543M30LF	30	500	insert UNC 4.40	metal bracket	D*VxWxS543M30LF	30	500	female screw UNC 4.40	metal bracket																																																										
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS543G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS543G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS543G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS543M30LF	30	500	without	metal bracket																																																																																																		
D*LxWxS543M30LF	30	500	insert M3	metal bracket																																																																																																		
D*OxWxS543M30LF	30	500	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS543M30LF	30	500	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS543A40LF</td><td>40</td><td>500</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS543A40LF</td><td>40</td><td>500</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS543A40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS543A40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS543H40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS543H40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS543H40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS543H40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS543G40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS543A40LF	40	500	without	without	D*LxWxS543A40LF	40	500	insert M3	without	D*OxWxS543A40LF	40	500	insert UNC 4.40	without	D*VxWxS543A40LF	40	500	female screw UNC 4.40	without	D*xWxS543H40LF	40	500	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS543H40LF	40	500	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS543H40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS543H40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS543G40LF	40	500	without	metal bracket+harpoon PCB 1.60mm	F																																															
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*xWxS543A40LF	40	500	without	without																																																																																																		
D*LxWxS543A40LF	40	500	insert M3	without																																																																																																		
D*OxWxS543A40LF	40	500	insert UNC 4.40	without																																																																																																		
D*VxWxS543A40LF	40	500	female screw UNC 4.40	without																																																																																																		
D*xWxS543H40LF	40	500	without	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*LxWxS543H40LF	40	500	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*OxWxS543H40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*VxWxS543H40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*xWxS543G40LF	40	500	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS543G40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS543G40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS543G40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS543M40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS543M40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS543M40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS543M40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS543G40LF	40	500	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS543G40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS543G40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS543M40LF	40	500	without	metal bracket	D*LxWxS543M40LF	40	500	insert M3	metal bracket	D*OxWxS543M40LF	40	500	insert UNC 4.40	metal bracket	D*VxWxS543M40LF	40	500	female screw UNC 4.40	metal bracket																																																										
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS543G40LF	40	500	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS543G40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS543G40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS543M40LF	40	500	without	metal bracket																																																																																																		
D*LxWxS543M40LF	40	500	insert M3	metal bracket																																																																																																		
D*OxWxS543M40LF	40	500	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS543M40LF	40	500	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th colspan="4">www.fciconnect.com</th><th>surface ISO 1302</th><th>tolerance std ISO 406 ISO 1101</th><th>projection </th><th>mm </th></tr><tr><th>Dr</th><th>M</th><th>PESSON</th><th>2005-10-11</th><th rowspan="3">ANGULAR LINEAR</th><th colspan="2">TOLERANCES UNLESS OTHERWISE SPECIFIED</th><th rowspan="3">size A2</th><th rowspan="3">Scale 2:1</th></tr><tr><th>Eng</th><th>P</th><th>LEGARE</th><th>2005-10-11</th><th>0.X</th><th>±0.3</th></tr><tr><th>Chr</th><th></th><th></th><th></th><th>0.XX</th><th>±0.1</th></tr><tr><th>Appr</th><th></th><th></th><th></th><th>0° ±2°</th><th>0.XXX</th><th>±0.05</th><th>ECN</th><th>F10-0060</th></tr><tr><th colspan="4">Product family</th><th colspan="5">- Spec ref</th></tr><tr><th colspan="4">FCI</th><th colspan="4">SUB FEMALE DMW EUROPE</th><th colspan="2">Rev. E</th></tr><tr><th colspan="4">mixed power right angled solder</th><th colspan="4">catalog no</th><th colspan="2">CUSTOMER</th></tr><tr><th colspan="4">- sheet 3 of 7</th></tr></table>					www.fciconnect.com				surface ISO 1302	tolerance std ISO 406 ISO 1101	projection 	mm 	Dr	M	PESSON	2005-10-11	ANGULAR LINEAR	TOLERANCES UNLESS OTHERWISE SPECIFIED		size A2	Scale 2:1	Eng	P	LEGARE	2005-10-11	0.X	±0.3	Chr				0.XX	±0.1	Appr				0° ±2°	0.XXX	±0.05	ECN	F10-0060	Product family				- Spec ref					FCI				SUB FEMALE DMW EUROPE				Rev. E		mixed power right angled solder				catalog no				CUSTOMER		- sheet 3 of 7																														
www.fciconnect.com				surface ISO 1302	tolerance std ISO 406 ISO 1101	projection 	mm 																																																																																															
Dr	M	PESSON	2005-10-11	ANGULAR LINEAR	TOLERANCES UNLESS OTHERWISE SPECIFIED		size A2	Scale 2:1																																																																																														
Eng	P	LEGARE	2005-10-11		0.X	±0.3																																																																																																
Chr					0.XX	±0.1																																																																																																
Appr				0° ±2°	0.XXX	±0.05	ECN	F10-0060																																																																																														
Product family				- Spec ref																																																																																																		
FCI				SUB FEMALE DMW EUROPE				Rev. E																																																																																														
mixed power right angled solder				catalog no				CUSTOMER																																																																																														
- sheet 3 of 7																																																																																																						
REV E - 2006-03-28		I		2		3		4		5		6		7		8																																																																																						





FCI
Copyright FCI.

shell size *
E
A
A
B
B
B
B
C
C
C
D

LAYOUTS
xWx
5W1
11W1
7W2
21W1
17W2
13W3
9W4
25W3
21WA4
27W2
24W7





www.fciconnect.com			surface - 		tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1			
Eng	P LEGARE	2005-10-11			0.XX	±0.1					
Chr			0°	±2°	0.XXX	±0.05	ECN		F10-0060		
Appr			Product family				-	Spec ref			
			title SUB FEMALE DMW EUROPE mixed power right angled solder				dwg no C01-8639-2300			Rev. E	
catalog no				-			CUSTOMER			sheet 3 of 7	

5W1

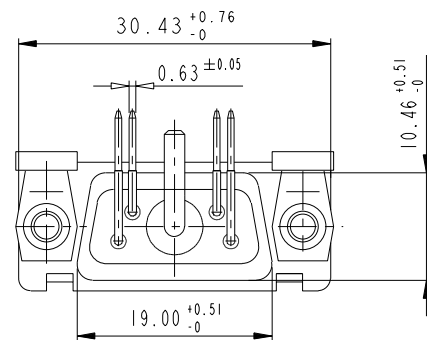
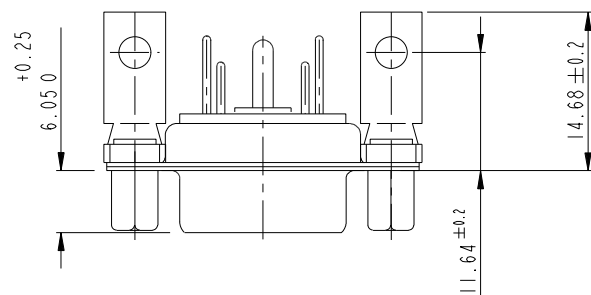
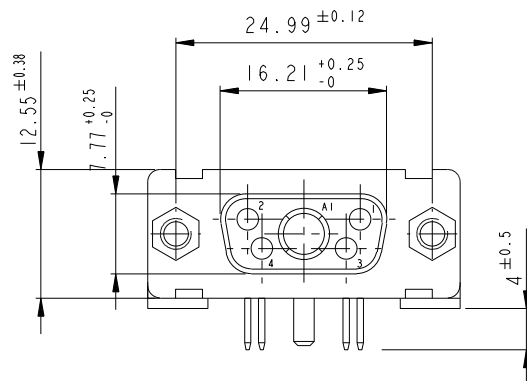
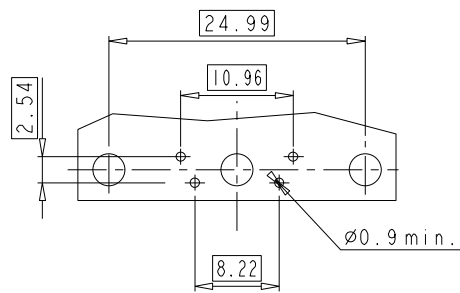
LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

Floating signal contacts


11W1

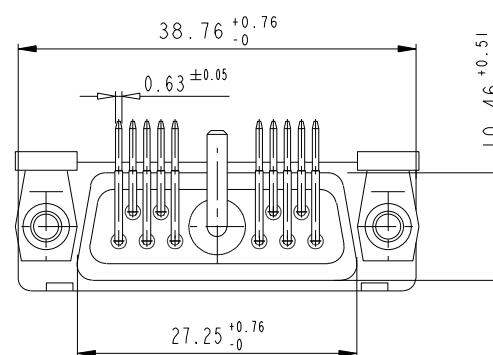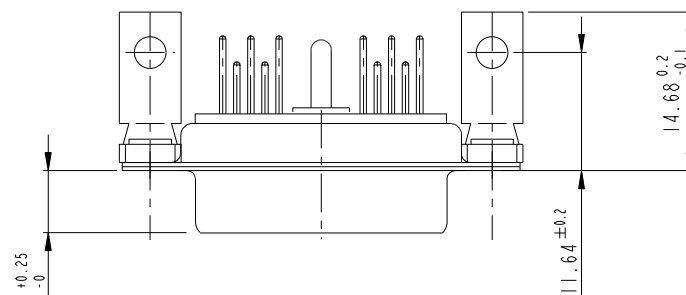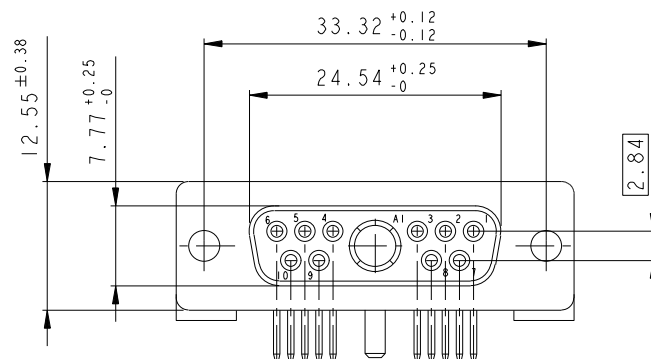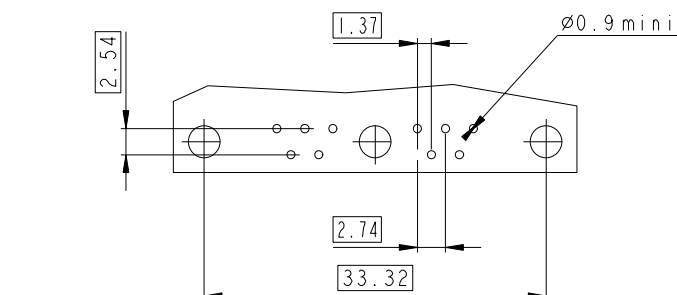LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I


7W2

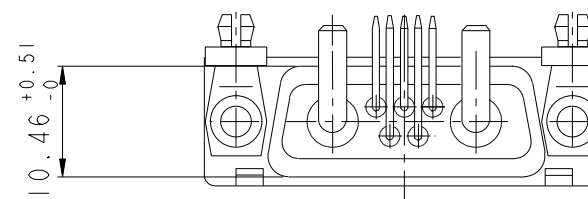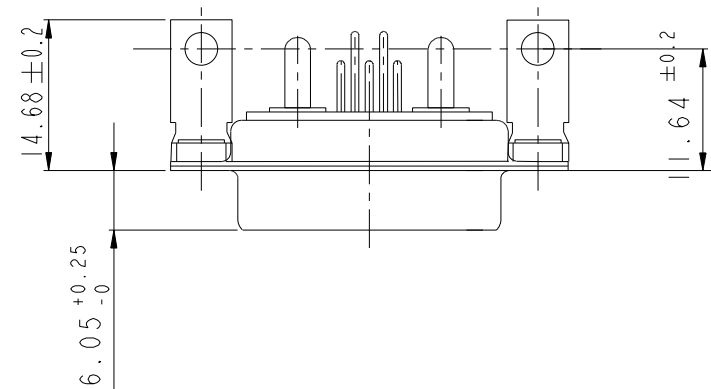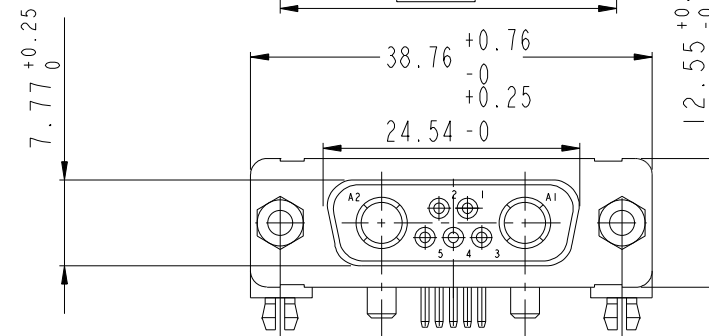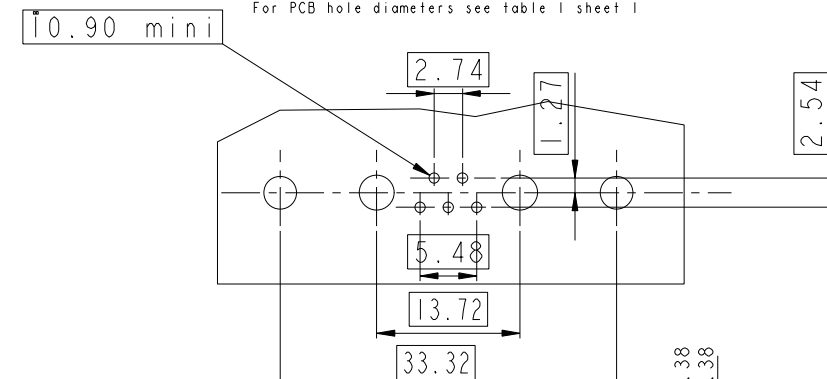LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet ISIDE VIEW FOR ALL LAYOUTS
(except size D)

VIEW WITHOUT POWERS CONTACTS

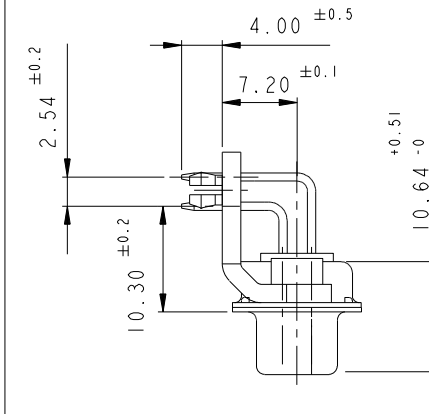

VIEW WITH POWERS CONTACTS




Copyright FCI.

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1			
Eng	P LEGARE	2005-10-11			0.XX	±0.1					
Chr					0° ±2°	0.XXX					±0.05
Appr			Product family			-	Spec ref				
			title SUB FEMALE DMW EUROPE mixed power right angled solder			dwg no C01-8639-2300			Rev E		
			catalog no			-	CUSTOMER		sheet 4 of 7		

I 2 3 4 5 6 7 8


13W3

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

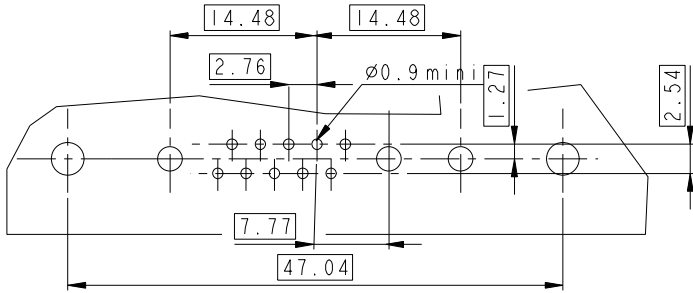


9W4

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

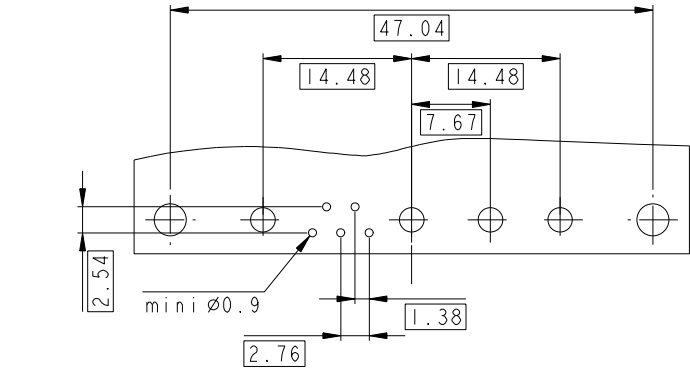

17W2

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

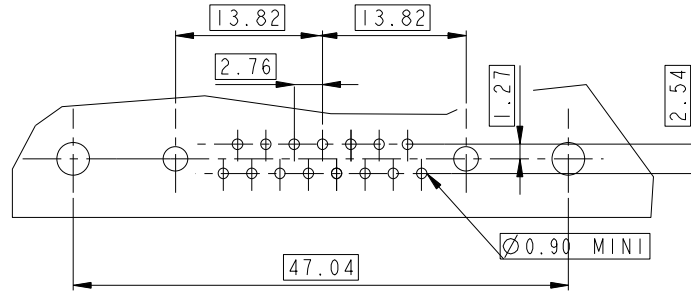

A

B

C

D

E

F

A










B

C

D

E

F

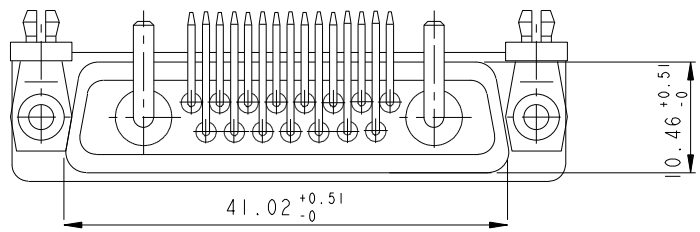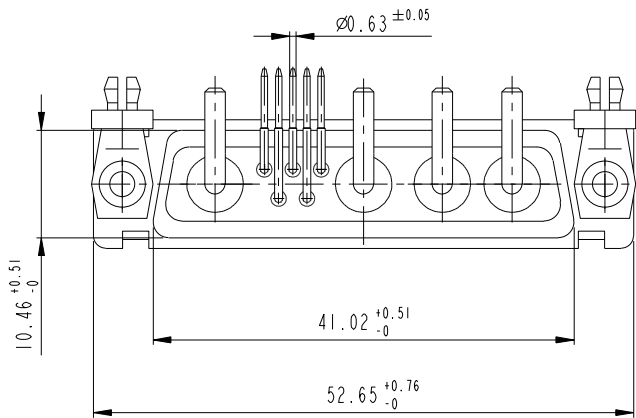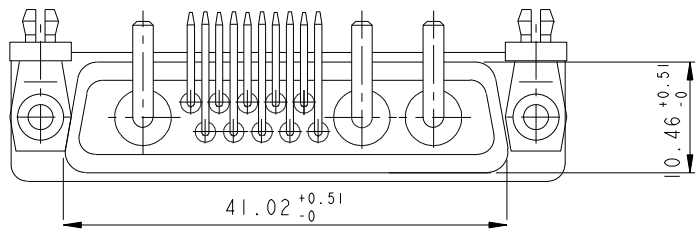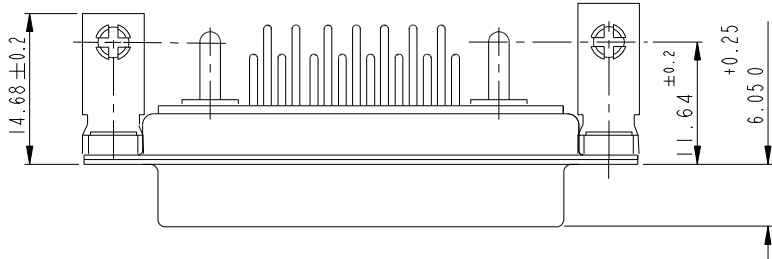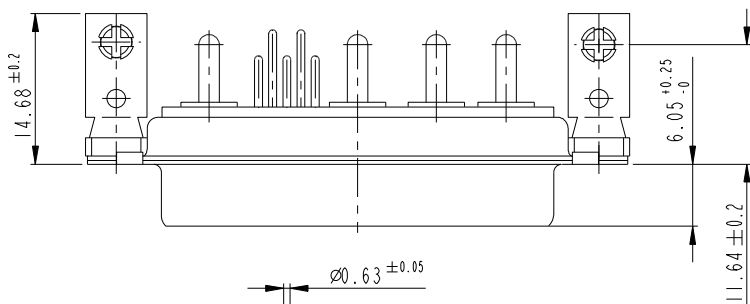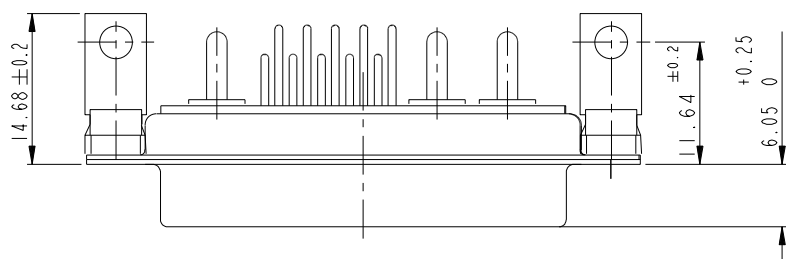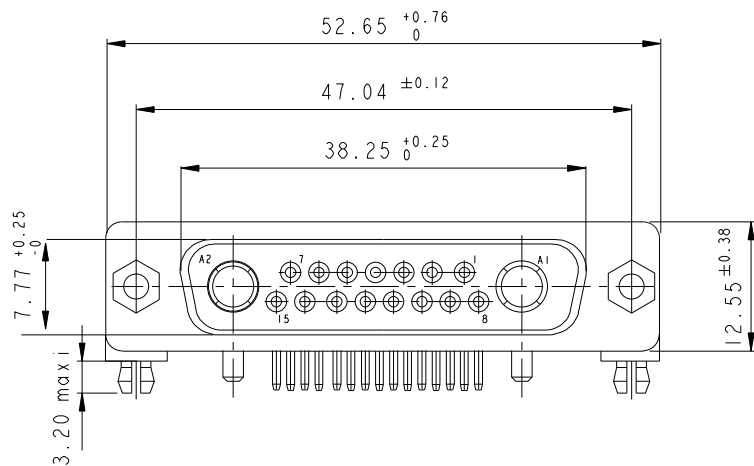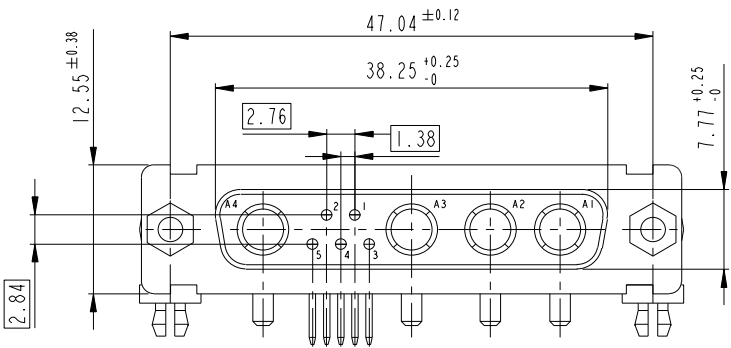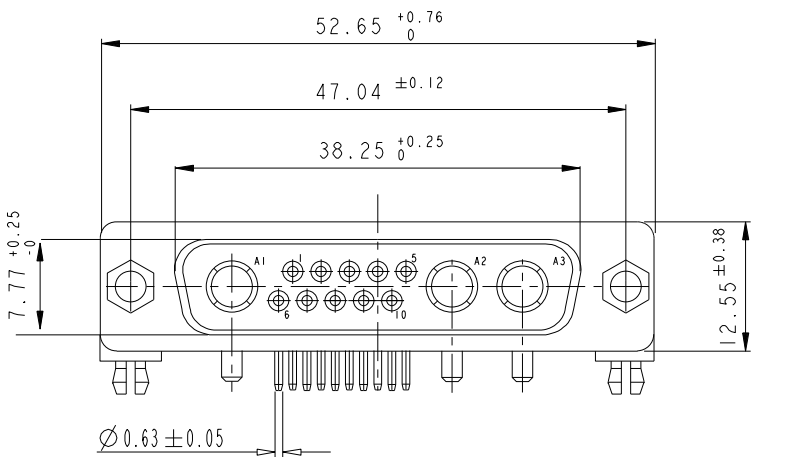

Floating signal contacts


www.fciconnect.com			surface - 		tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 			
			TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X ±0.3		size A2	Scale 2:1				
Eng	P LEGARE	2005-10-11			0.XX ±0.1							
Chr					0.XXX ±0.05				ECN F10-0060			
Appr			Product family					-		Spec ref		
			title SUB FEMALE DMW EUROPE mixed power right angled solder					dwg no C01-8639-2300			Rev. E	
			catalog no -					CUSTOMER			sheet 5 of 7	



Copyright FCI.

REV E - 2006-03-28

I 2 3 4 5 6 7 8

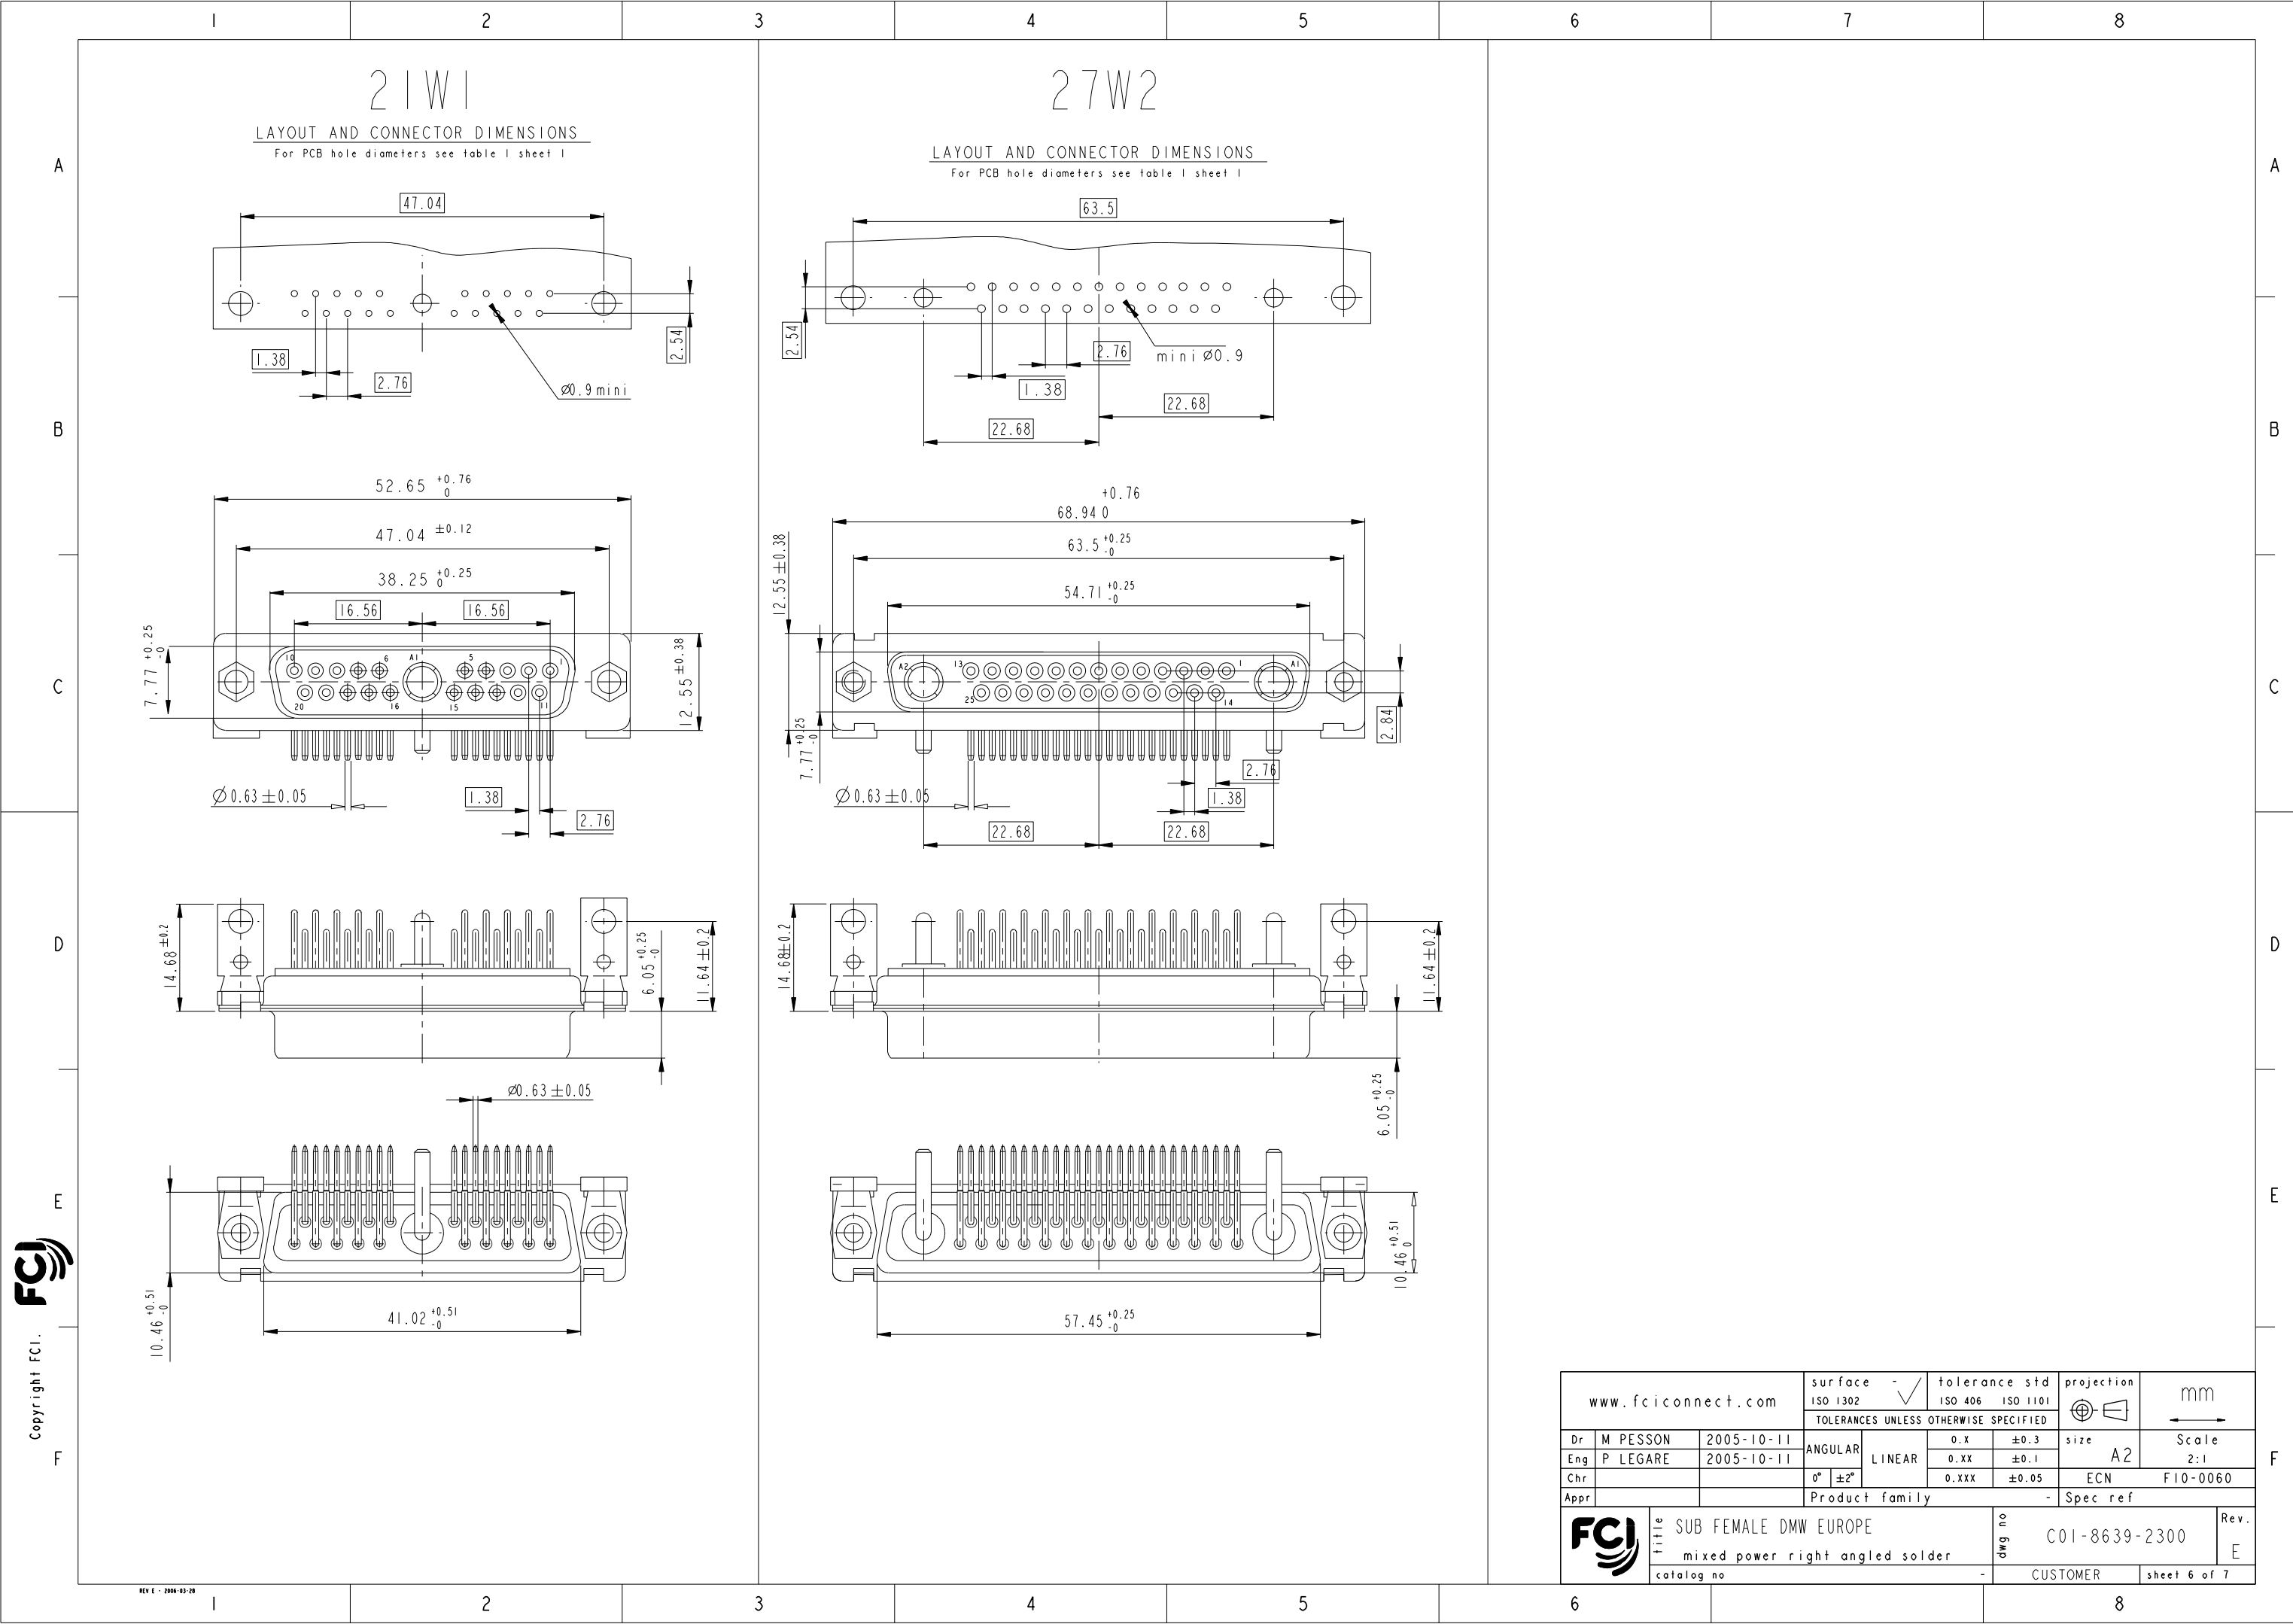


FCI
Copyright FCI.

www.fciconnect.com		surface	-	tolerance std	ISO 1302	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M PESSON	2005-10-11	ANGULAR	0.X	±0.3	size	A2	Scale	2:1
Eng	P LEGARE	2005-10-11	LINEAR	0.XX	±0.1	ECN	F10-0060	Rev.	E
Chr			0° ±2°	0.XXX	±0.05	Product family	-	Spec ref	
Appr									
FCI		SUB FEMALE DMW EUROPE			dwg no		C01-8639-2300		
		mixed power right angled solder			catalog no		CUSTOMER		
							sheet 6 of 7		

21W A4

LAYOUT AND CONNECTOR DIMENSIONS


For PCB hole diameters see table 1 sheet 1

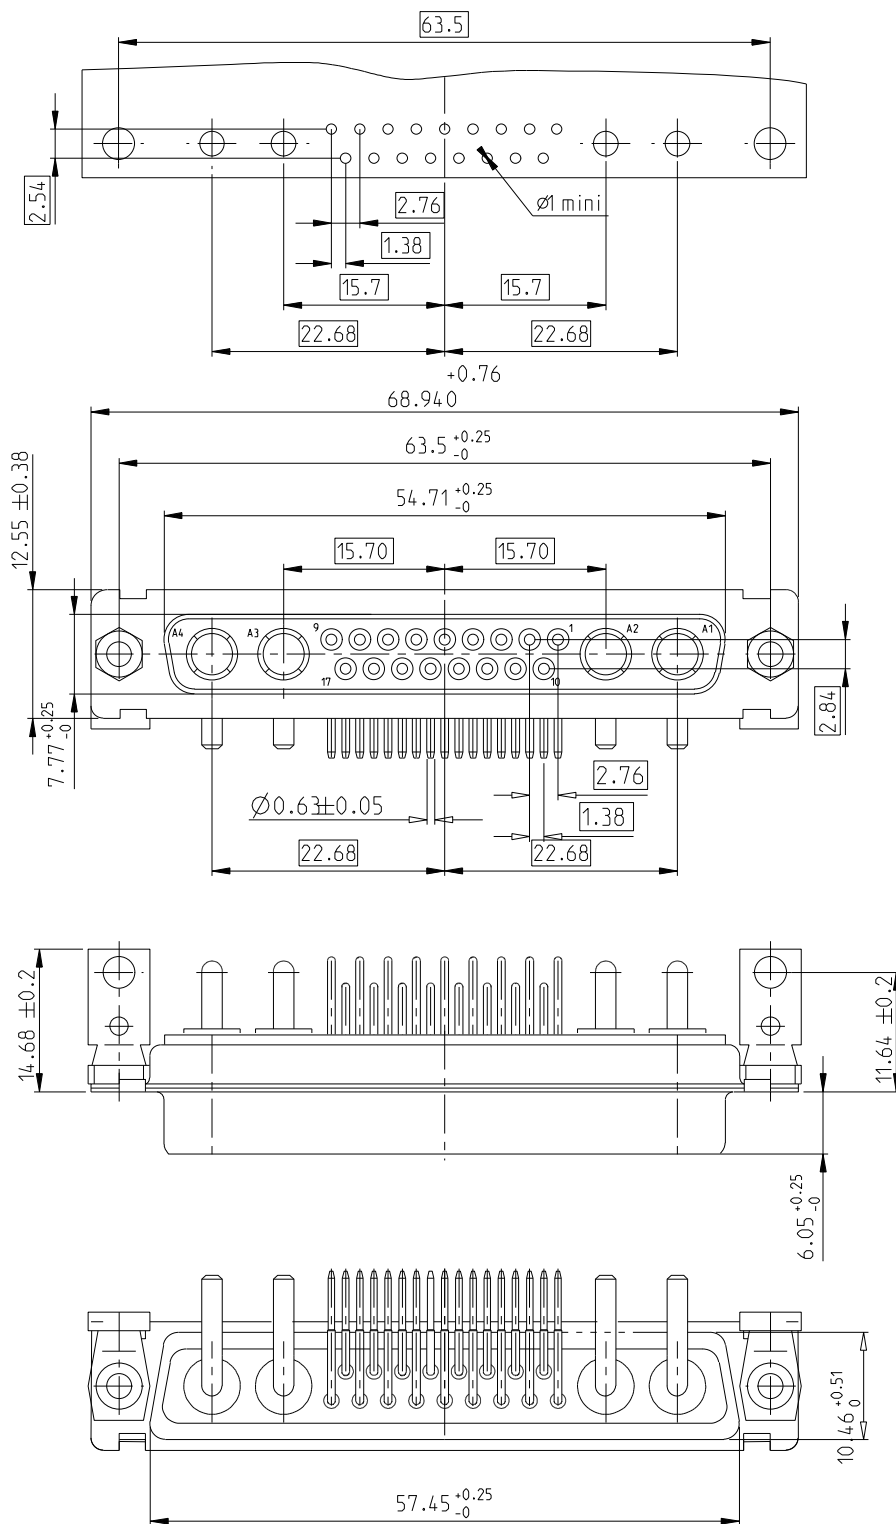

25W 3

LAYOUT AND CONNECTOR DIMENSIONS


For PCB hole diameters see table 1 sheet 1

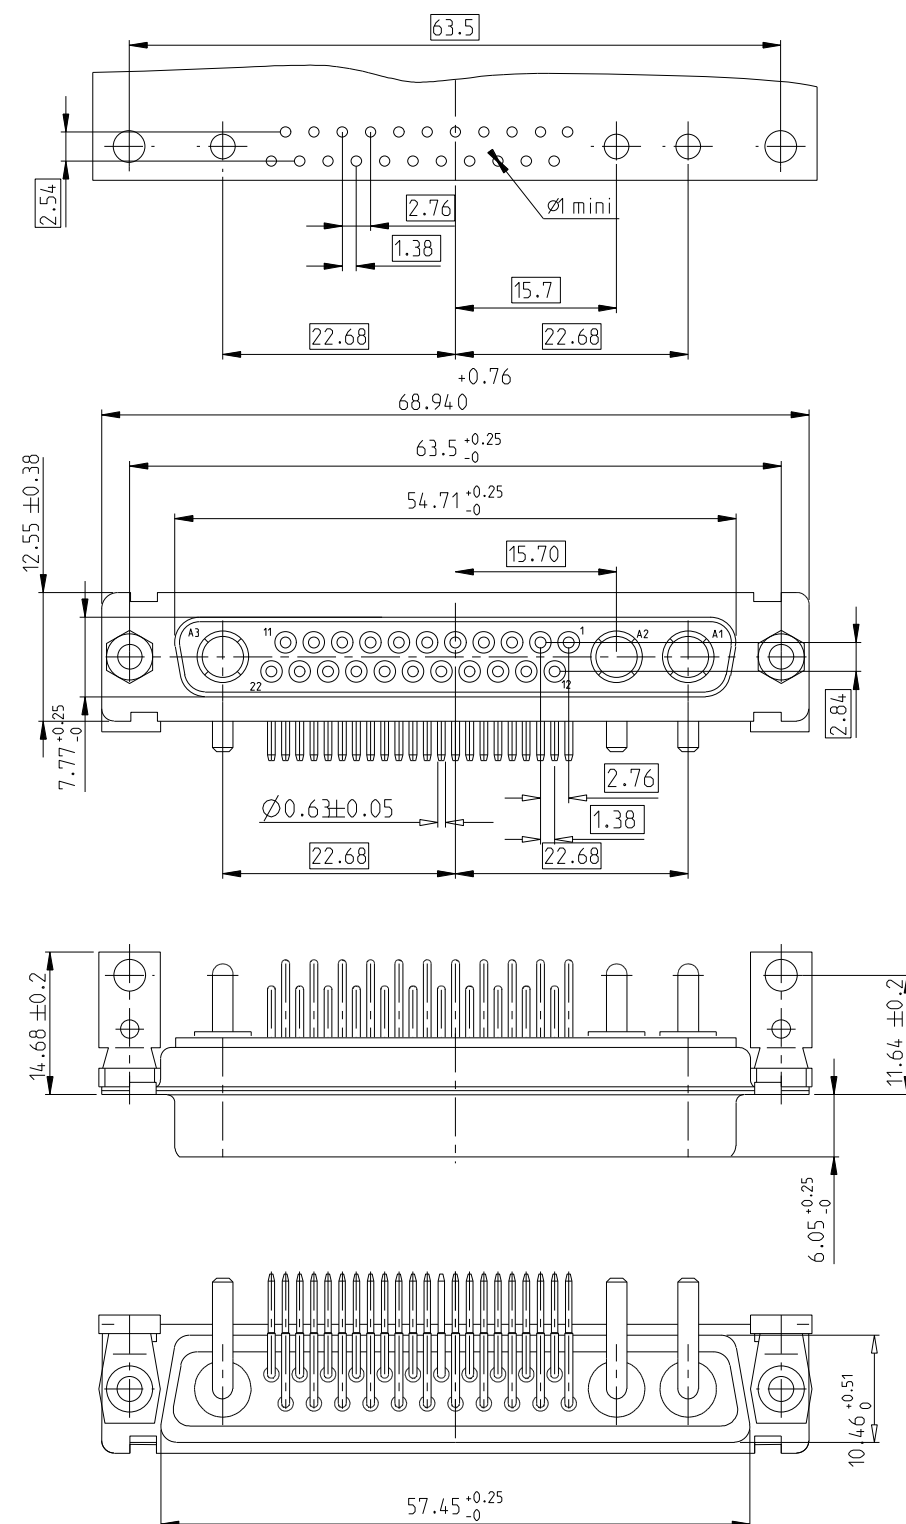

24W 7

LAYOUT AND CONNECTOR DIMENSIONS

For PCB hole diameters see table 1 sheet 1

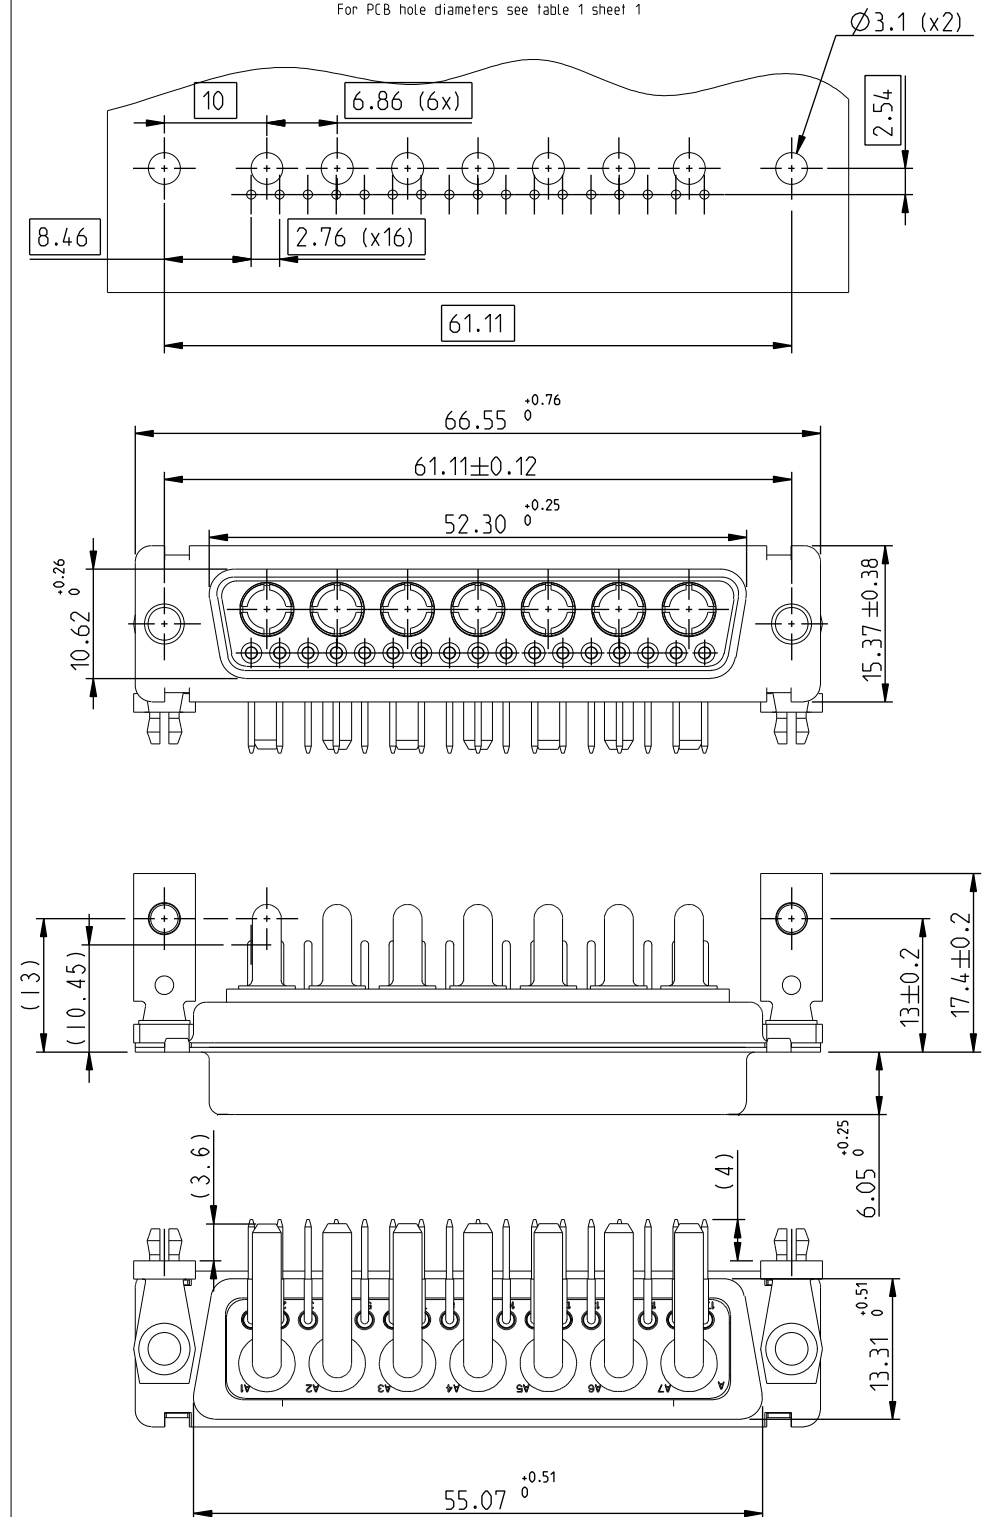

www.fciconnect.com			Surface ISO 1302		- ✓ tolerance std ISO 406 ISO 1101		projection 		 mm		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size	A2			
Eng	P LEGARE	2005-10-11			0.XX	±0.1	Scale			2:1	
Chr					0° ±2°	0.XXX	±0.05	ECN			F10-0060
Appr			Product family				-		Spec ref		
			title SUB FEMALE DMW EUROPE mixed power right angled solder			dwg no C01-8639-2300			Rev. E		
catalog no			-			CUSTOMER			sheet 7 of 7		