

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

5XE18

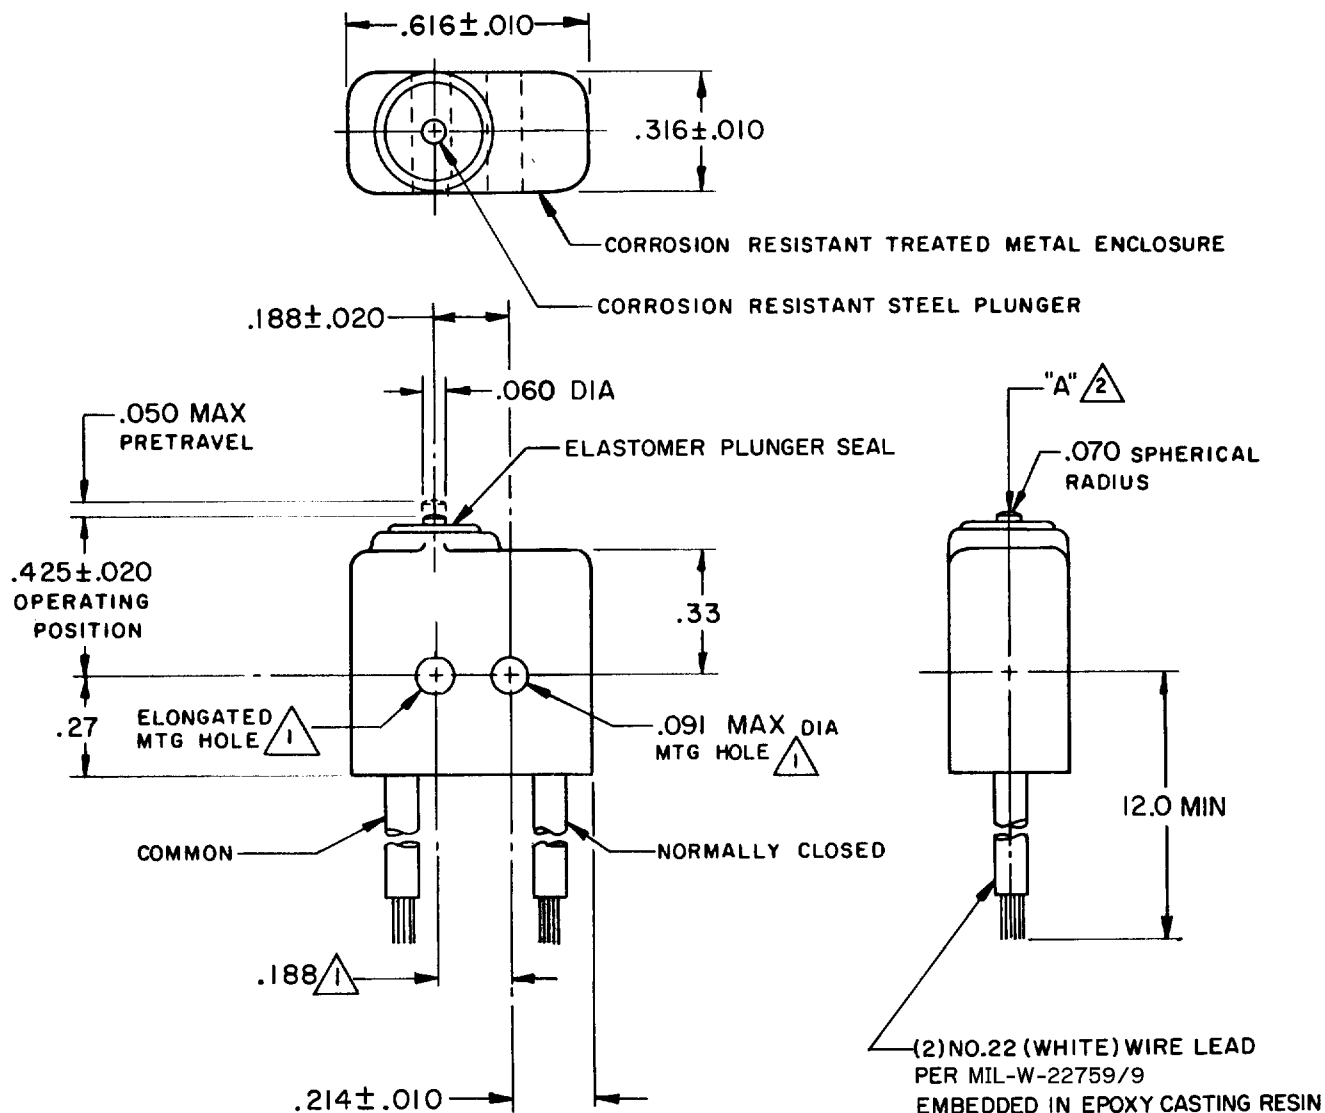

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.188 \pm .002$ CENTERS
- 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 WEIGHT OF SWITCH ONLY IS $.16$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS $.55$ OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 5-17 OZ
RELEASE FORCE - - - - - 4 OZ MIN
RELEASE TRAVEL - - - - - $.004$ MIN
DIFFERENTIAL TRAVEL - - - - - $.005$ MAX
OVERTRAVEL - - - - - $.004$ MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

28 VOLTS DC RATING

INDUCTIVE - - - - - SEA LEVEL - - - 4 AMP
50,000 FT - - - 2.5 AMP
RESISTIVE - - - - - SEA LEVEL - - - 7 AMP
50,000 FT - - - 7 AMP
MAXIMUM INRUSH - - - - - 24 AMP

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT Δ 3

5XE18
PAGE 1 OF 1

M

DRAWING
NUMBER

3

X 6

ISSUE

3

REVISIONS

A	08S DWG CO-34416	0 J D	20 DEC 74
B	RE-INS PR-4927	K P K	1 APR 75
C	CO52067	C J H	21 SEP 82
D	CO 57328-A	W J M	15 APR 85
E	CO94282	D L M	3 MAR 99

FORMTEK
FO-50378-1A

DRAWN

REPLACES

PR-4927

RELEASE NO.

CHECK

70

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

APR 70

6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[5XE18](#)