


# Chassis Transformers

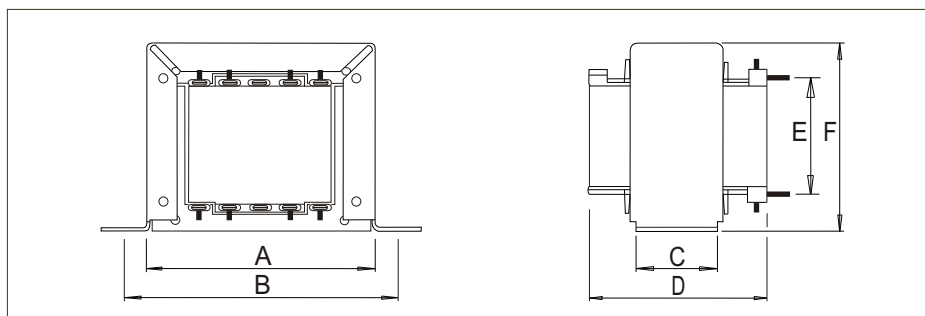

| Power (VA) | Mass (kg) | Regulation (%) | A (mm) | B* (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|------------|-----------|----------------|--------|---------|--------|--------|--------|--------|
| 3          | 0.17      | 20             | 45     | 54      | 16     | 35     | 23     | 37     |
| 6          | 0.23      | 20             | 50     | 60      | 18     | 38     | 25     | 41     |
| 12         | 0.31      | 20             | 56     | 68      | 20     | 41     | 28     | 47     |
| 20         | 0.53      | 15             | 59     | 73      | 28     | 52     | 31     | 50     |
| 30         | 0.64      | 20             | 70     | 83      | 24     | 51     | 36     | 56     |
| 40         | 0.68      | 15             | 70     | 83      | 34     | 60     | 36     | 56     |
| 50         | 1         | 10             | 78     | 92      | 27     | 56     | 41     | 65     |

\*Recommended fixing centres

## Part Numbering System

**Example - L 003 C 15 I**

### Output Power

003 = 3VA  
006 = 6VA  
012 = 12VA  
020 = 20VA  
030 = 30VA  
040 = 40VA  
050 = 50VA

### Style

C = chassis

### Voltage Output

06 = 2x6V  
09 = 2x9V  
12 = 2x12V  
15 = 2x15V  
18 = 2x18V  
20 = 2x20V  
24 = 2x24V

### Finish Options

T = Thermal cutout\*  
L = Flying leads\*  
I = Vacuum impregnation  
E = Additional Enveloping\*  
S = Single 230V Input

**Example L003C15I = Chassis mounted 115V/230V input, 2x15V output, 3VA transformer with vacuum impregnated varnish finish and solder tag termination.**

\* Available for certain sizes - please call for details.

- Input voltages, single 230V or dual 115V/230V 50/60Hz
- Reinforced isolation - tested at 3kVrms
- Transformers dip coated in varnish as standard
- Solder tag terminations
- Operational ambient temperature range -20°C to +50°C



**chassis  
transformers**

**CONTACT US NOW**  
**UNITED KINGDOM**  
**CRYDOM**

**T** +44 (0) 1202 897969  
**F** +44 (0) 1202 891918  
**E** [magnetics@crydom.com](mailto:magnetics@crydom.com)  
**W** [www.crydom.co.uk](http://www.crydom.co.uk)