

MICRO SWITCH

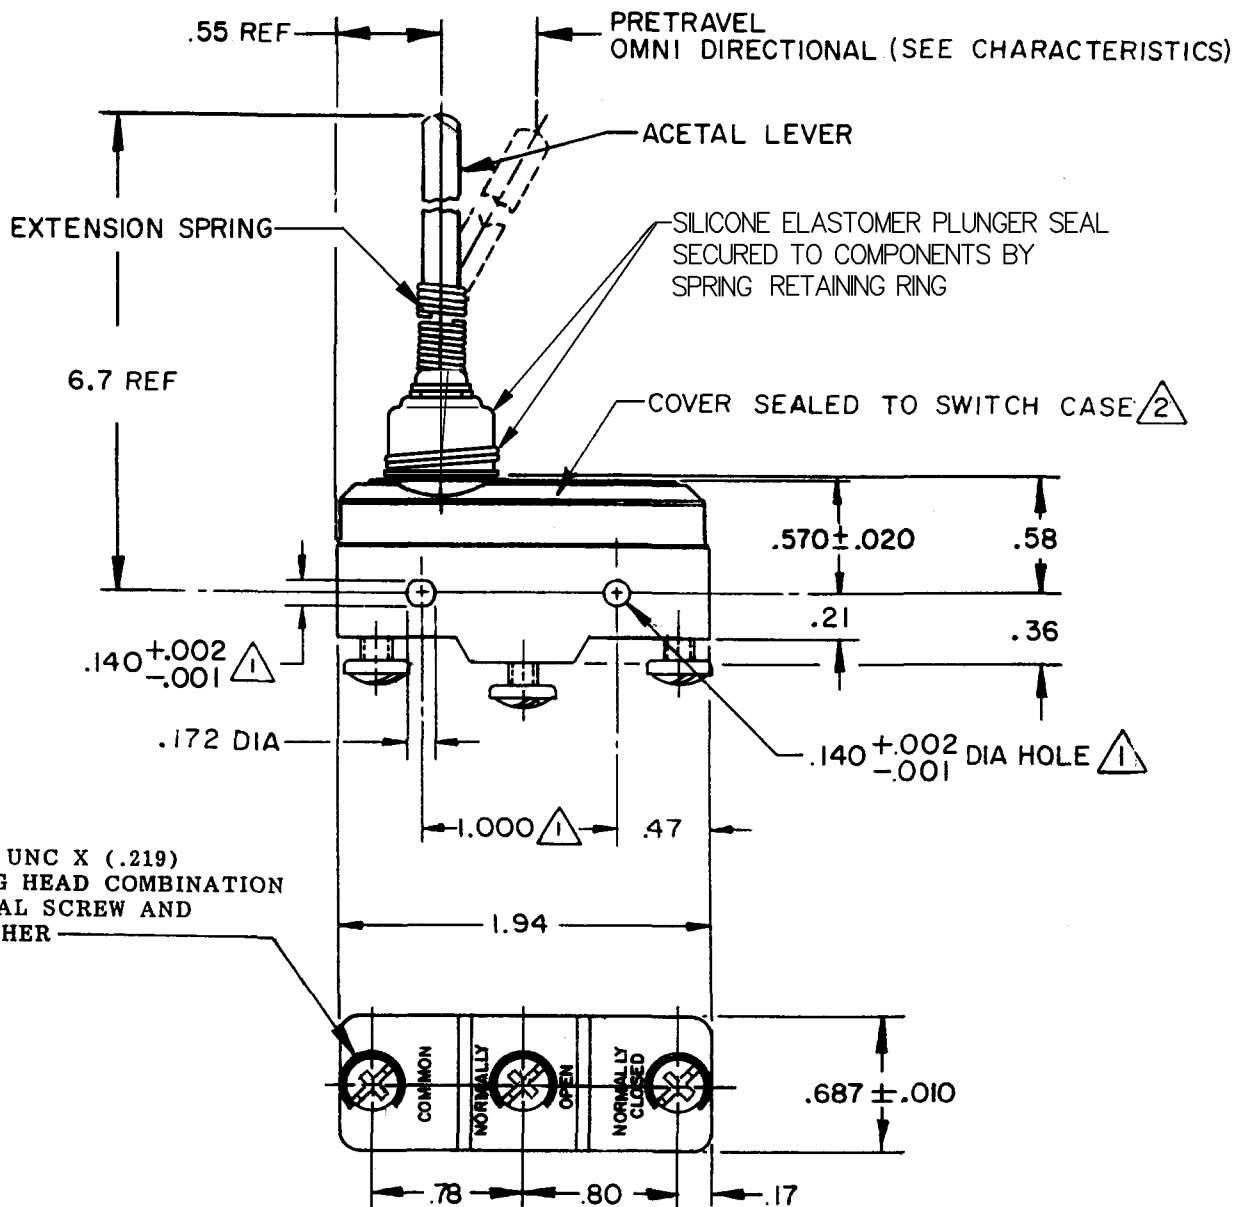
FREEPORT ILLINOIS, U.S.A.

A DIVISION OF HONEYWELL INC.

FED. MFG. CODE 91929

SWITCH - BASIC


CATALOG LISTING

BZ-2RQW1-A2**NOTE -**

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 $\pm .002$ CENTERS
- ② SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE ---- 2.5 OZ MAX

PRETRAVEL ---- .500 REF
(OMNI DIRECTIONAL)**ELECTRICAL DATA**CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D RL S
16A 250V ~ T85 5E4

SCALE FULL

DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES AREONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES $\pm$

RAW MATERIAL - COMMERCIAL STANDARD

DIMENSIONS ARE IN INCHES AND ARE
TO BE MET BEFORE PROTECTIVE
COATINGS ARE APPLIED

MICRO SWITCH STANDARDS APPLY

WEIGHT

BZ-2RQW1-A2

PAGE 1 OF 1

MDRAWING
NUMBER

9

ISSUE

REVISIONS

A C067209

JAP 3 MAY 90

B C071921

GJW 20 MAR 92

C CO-73287-J

JAL 22 NOV 93

D CO-77589

JAL 30 MAR 94

E CO-78624-B

DLT 18 OCT 94

F C083108

GJW 13 JUN 96

G C093346

DLT 11 SEP 98

H C093552

TSM 20 JAN 99

FORMTEK

DRAWN

CHECK

CHECK

CHECK

CHECK

CHECK