

Mn-Zn

Large Size Ferrite Cores for High Power

T series



REMINDERS FOR USING THESE PRODUCTS

Please be sure to read this manual thoroughly before using the products.

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

When using the products for specific purposes, please first make confirmations in areas such as safety, reliability, and quality.

Please understand that we are not in a position to be held responsible for any damage or the like caused by any use exceeding the range or conditions of this specification sheet or by any use in the specific applications.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose standard applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc to ensure higher safety.

FERRITES



Large Size Ferrite Cores for High Power

Product compatible with RoHS directive Halogen-free

Overview of the T Series


FEATURES

- Large size cores for transformers with large power outputs.
- Ocan also be used in reactors.

APPLICATION

- Large size industrial equipment, transformers for consumer equipment
- Reactors

PART NUMBER CONSTRUCTION

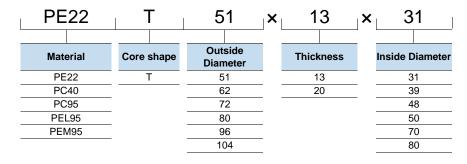

■ RANGE OF USE AND STORAGE TEMPERATURE


Temperature range							
Operating	Storage						
temperature	temperature						
(°C)	(°C)						
-30 to +105	-30 to +85						


- $\bigcirc \, \text{RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html}$
- O Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.


FERRITES

Mn-Zn系 T Cores

■ SHAPES AND DIMENSIONS







Part No.		Dimensions			Effective parameter						Electrical characteristics
Material	Shape Dimensions	(mm)			Core factor		Effective cross-sectional	Effective magnetic path length	Effective core	Weigh (Approx.)	AL-value
		øΑ	øΒ		C ₁ (mm ⁻¹)	C ₂ x10 ⁻² (mm ⁻³)	Ae (mm²)	Le (mm)	Ve (mm³)	(g)	(nH/N ²) 1kHz, 0.4A/m 23°C
PE22 PC40 PC95 PEL95 PEM95	T51x13x31	51.0±1.0	31.0±0.6	13.0±0.5	0.97084	0.76235	127	124	15740	80	2330±25% 2980±25% — —
PE22 PC40 PC95 PEL95 PEM95	T62x13x39	62.5±1.2	39.0±0.8	13.5±0.5	0.98689	0.63377	156	154	23930	121	2290±25% 2930±25% — —
PE22 PC40 PC95 PEL95 PEM95	T72x20x48	72.0±1.5	48.0±0.9	20.0±0.5	0.77481	0.32729	237	183	43420	217	2920±25% 3730±25% — —
PE22 PC40 PC95 PEL95 PEM95	T80x20x50	80.0±1.6	50.0±1.0	20.0±0.5	0.66842	0.22694	295	197	58990	294	3380±25% 4320±25% — —
PE22 PC40 PC95 PEL95 PEM95	T96x20x70	96.0±1.9	70±1.5	20.0±0.5	0.99464	0.38574	258	256	66130	325	2270±25% 2910±25% – –
PE22 PC40 PC95 PEL95 PEM95	T104x20x80	104.0±2.1	80	20.0±0.5	1.19742	0.50179	239	286	68180	333	1890±25% 2410±25% — —

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

PC40_T104X20X80 PC40_T51X13X31 PC40_T62X13X39 PC40_T72X20X48 PC40_T80X20X50

PC40_T96X20X70 PE22_T104X20X80 PE22_T51X13X31 PE22_T62X13X39 PE22_T72X20X48 PE22_T80X20X50

PE22_T96X20X70 PE90_T104X20X80 PE90_T51X13X31 PE90_T62X13X39 PE90_T72X20X48

PE90_T80X20X50 PE90_T96X20X70