


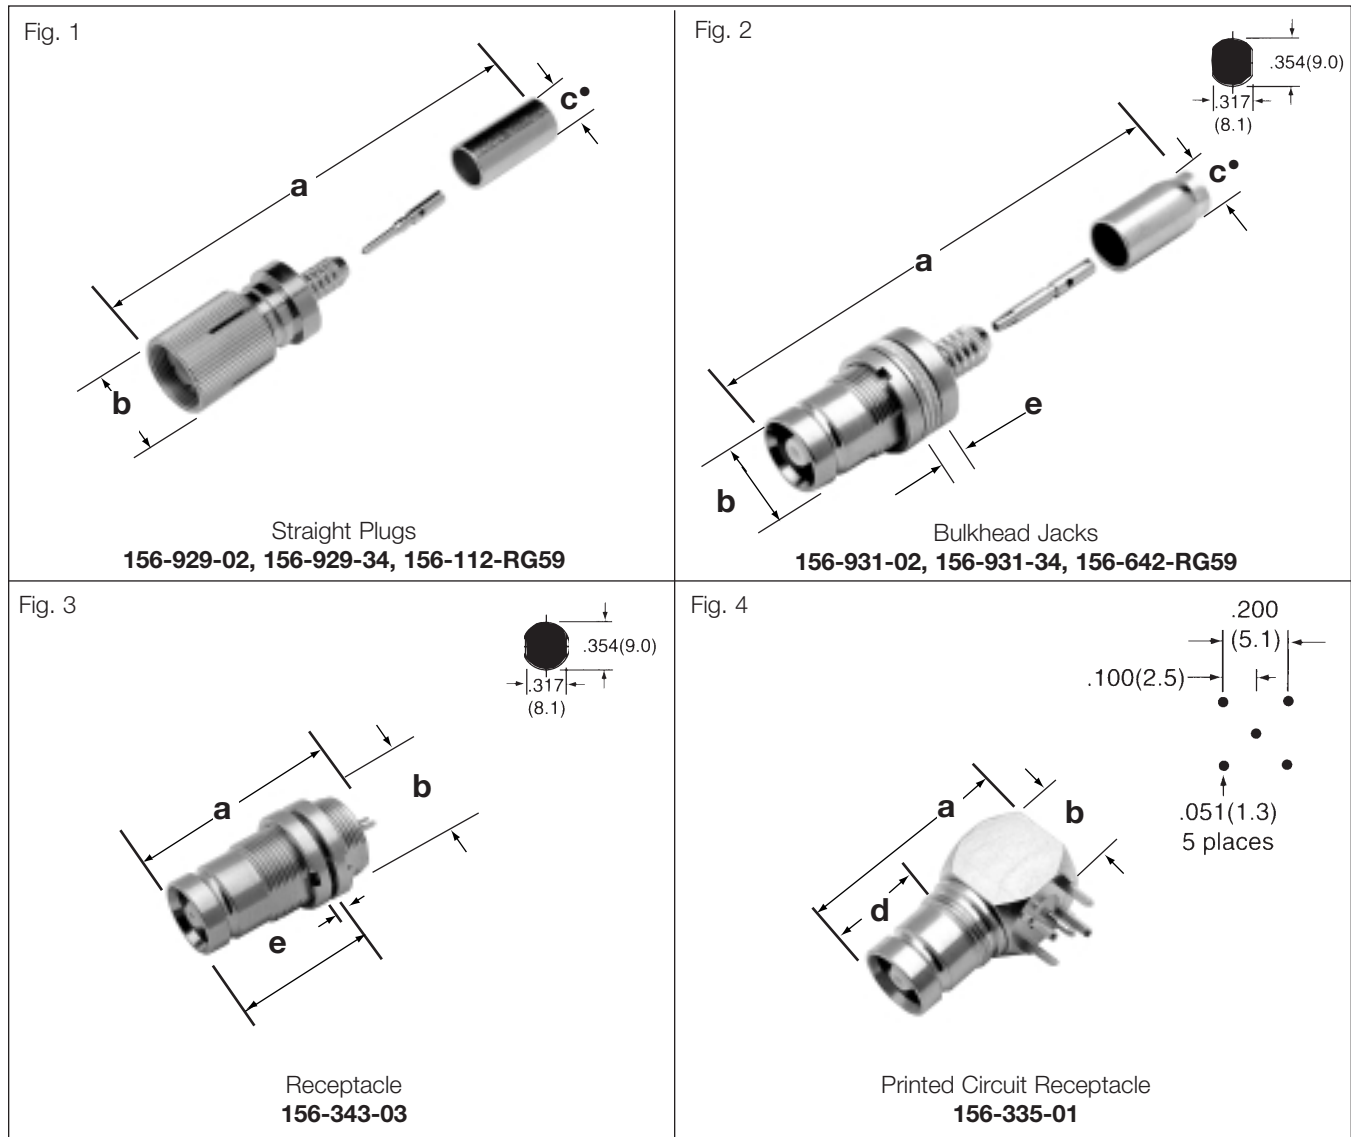

1.6/5.6 PLUGS, BULKHEAD JACKS, RECEPTACLES

Connector Description	Cable	Cable Attachment		Dimensions, inches (millimeters)					Amphenol Number	Fig.
		Outer	Inner	a	b	c •	d	e		
Plug	L910/34 BT3002	Crimp	Crimp	1.18 (30.0)	.425 (10.8)	.161 (4.1)	—	—	156-929-34	1
	L910/16	Crimp	Crimp	1.18 (30.0)	.425 (10.8)	.205 (5.2)	—	—	156-929-02	1
	RG59	Crimp	Crimp	.984 (25.0)	.433 (11.0)	.220 (5.6)	—	—	156-112-RG59	1
Bulkhead Jack	L910/34 BT3002	Crimp	Crimp	1.26 (32.0)	.425 (10.8)	.161 (4.1)	.543 (13.8)	.047 (1.2)	156-931-34	2
	L910/16	Crimp	Crimp	1.26 (32.0)	.425 (10.8)	.205 (5.2)	.543 (13.8)	.047 (1.2)	156-931-02	2
	RG59	Crimp	Crimp	1.00 (25.5)	.425 (10.8)	.220 (5.6)	—	—	156-642-RG59	2
Receptacle	Front Mount or Rear Mount	Solder Cup		.906 (23.0)	.425 (10.8)	—	.630 (16.0)	.138 (3.5)	156-343-03	3
Printed Circuit Receptacle 4 legs & terminal .118 (3.0) long x .039 (1.0) diameter / .039 (1.0) stand off pads		Blunt Post		.827 (21.0)	.433 (11.0)	—	.433 (11.0)	—	156-335-01	4

• accommodates cable diameter ■ includes outer ferrule

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[156-931-34](#)