


rectangular solids - for flat ribbon cables

WITH OPTIONAL SHOCK-MOUNT ADHESIVE FOAM BASE. Solid ferrite suppressors configured to accept flat ribbon cables. Must be installed prior to termination of the cable. High tack adhesive mounting pad secures the cable routing to a fixed point on almost any surface. Can be stacked one on top of another. A variety of designs accommodate special installation and insertion loss requirements.

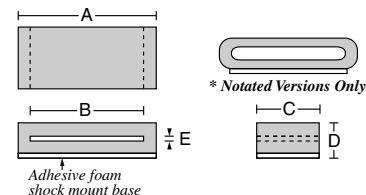

PART No.	w/Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS
28B0785	SM28B0785	.785	.515	1.100	.445	.145	170 @ 100MHz
28R1531*	SM28R1531*	1.530	1.045	1.125	1.055	.510	196 @ 100MHz
28B1775	SM28B1775	1.775	1.355	1.125	.520	.060	293 @ 100MHz
28B1779	SM28B1779	2.500	2.050	1.125	.530	.066	295 @ 100MHz
28B1101	SM28B1101	1.101	.902	.577	.335	.059	133 @ 100MHz
28B1775-1	SM28B1775-1	1.775	1.355	.500	.520	.060	151 @ 100MHz
28B2170-1	SM28B2170-1	2.170	1.720	.500	.530	.050	176 @ 100MHz
28B2002	SM28B2002	2.394	2.000	.610	.724	.300	109 @ 100MHz
28B3149	SM28B3149	3.149	2.700	.500	.502	.075	93 @ 100MHz

performance by part number:

