
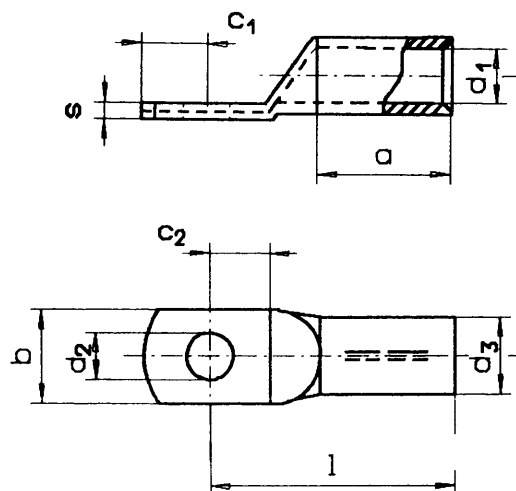


STA-KON®

Copper Tube Terminals

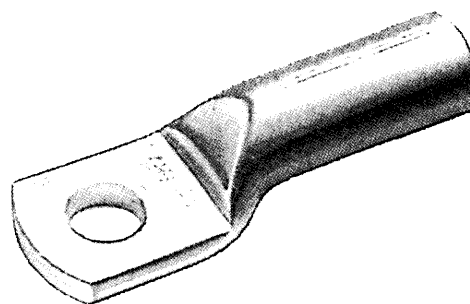

Uninsulated Copper Tube Terminals

Part No.	Wire Size mm ²	Stud Size	WKZ	l	c1	Dimensions mm		d1	d2	Weight kg/100	Pack Size
T 2.5-4*	2.5	M 4		13	4	7.5	1.2	2.3	4.3	0.13	
T 4-6*	4	M 6		19	6.5	10	1.2	3	6.5	0.24	100
T 6-5	6	M 5	5	24	6.5	8.5	1.5	3.8	5.3	0.31	100
T 6-6		M 6			7.5	8.5	1.5		6.4	0.30	
T 10-6		M 6			7.5	9	1.5		6.4	0.36	
T 10-8	10	M 8	6	27	10	13	1.3	4.5	8.4	0.39	100
T 10-10		M 10			12	17	1.5		10.5	0.37	
T 16-6		M 6			7.5	13			6.4	1.18	
T 16-8	16	M 8	8	36	10	13	2.5	5.5	8.4	1.18	100
T 16-10		M 10			12	17			10.5	1.20	
T 25-6		M 6			7.5	14			6.4	1.49	
T 25-8	25	M 8	10	38	10	16	3	7	8.4	1.57	100
T 25-10		M 10			12	17			10.5	1.58	
T 25-12		M 12			13	19			13	1.54	
T 35-8	35	M 8	12	42	10	17	3.5	8.2	8.4	2.75	100
T 35-10		M 10			12	19			10.5	2.85	
T 50-8	50	M 8	14	52	10	20	4	10	8.4	4.50	100
T 50-10		M 10			12	22			10.5	4.50	
T 70-10	70	M 10	16	55	12	24	4.5	11.5	10.5	6.15	50
T 95-10	95	M 10	18	65	12	28	5	13.5	10.5	9.15	50
T 120-10	120	M 10	20	70	15	32	5.5	15.5	10.5	11.40	50
T 150-10		M 10			15				10.5	16.40	

*According to DIN 40500 Ringform with inspection hole
For Tooling see page 182-194