



Spacers

Brass Hexagonal Pillars


- ❖ Special body lengths can be manufactured, by specifying the length in the order code:-
Example: R30-400xx02, xx denotes body length in mm
Please contact technical@harwin.com for a quotation.
- ❖ Brass, nickel plated.

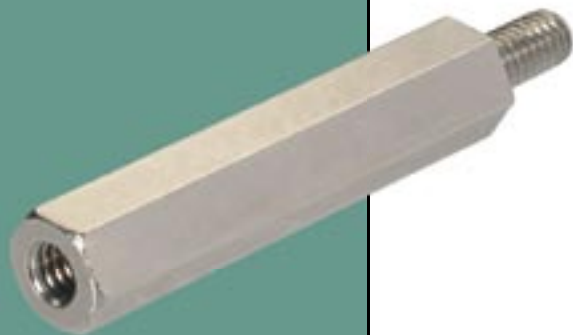

MALE/MALE

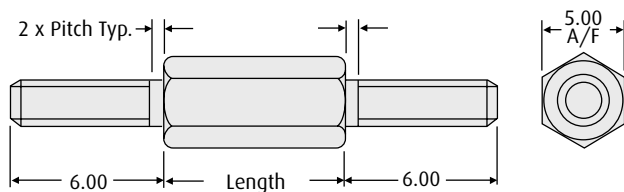

MALE/FEMALE

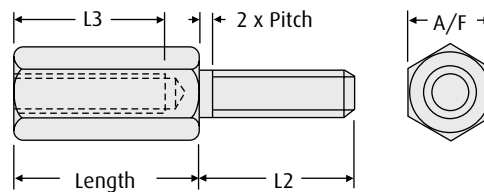

CALCULATION OF L3 (min)

	Length mm										
Series	4	5	6	7	8	9	10	11	12	13	14+
R30-300	2.5	3.0	3.0	5.0	5.5	6.0	6.0	6.0	6.0	6.0	6.0
R30-301	2.5	3.0	3.0	5.0	5.5	6.0	7.0	8.0	8.0	8.0	8.0
R40-300	x	x	2.5	3.0	4.5	5.5	6.5	8.0	8.0	8.0	8.0
R50-300	x	x	x	x	4.0	5.0	6.0	7.5	8.0	10.0	10.0
R60-300	x	x	x	x	x	x	5.0	7.0	7.0	8.0	10.0

HOW TO ORDER

R XX - XXX XX 02

SERIES CODE

THREAD SIZE & STYLE

R30-300	M3 Male/Female, 5.0mm A/F, L2 = 6mm
R30-301	M3 Male/Female, 5.0mm A/F, L2 = 8mm
R30-400	M3 Male/Male
R40-300	M4 Male/Female, 7.0mm A/F, L2 = 8mm
R50-300	M5 Male/Female, 8.0mm A/F, L2 = 10mm
R60-300	M6 Male/Female, 10.0mm A/F, L2 = 10mm

FINISH

02 Nickel

LENGTH (mm)

R30	4-16, 18, 20, 25, 30, 35, 40
R40	6-16, 18, 20, 25, 30, 35
R50	8-16, 18, 20, 25, 30, 35, 40
R60	10-16, 18, 20, 25, 30, 40

www.harwin.com