



Placeable either horizontally or vertically,

2-Way^{plus} bench-top Smoke Absorber



● Normal installation

HAKKO FA-400 ESD SAFE
SMOKE ABSORBER



● Horizontal installation



● Another installation with Arm Stand

The principal components of soldering solvent (flux) are rosin and resin, and they release noxious components when heated and evaporated by soldering work. Prolonged breathing of these contaminants can lead headache, dizziness or eye trouble. The FA-400 is an essential unit to create safe and comfortable working environment protecting operators from direct breathing of unpleasant fume.

Smoke absorber available to use in 2 ways, "normal" and "face-down" position

In addition to horizontal and vertical installations, an optional arm stand allows use in suspended.



Normal installation

Wide-angle smoke absorption.



Horizontal installation

Powerful absorption at closer area with high flow rate. Because of low height, it gives less shade keeping your working area light.



Suspended by Arm Stand

Convenient for approach from above or use in a limited space.


*Arm stand is an optional part.

*The screw holes on FA-400 are covered by stickers.

Peel off the stickers before mounting the absorber in the arm stand.

Space-saving compact design

The footprint was reduced by approx.50% when placed vertically and approx.20% when placed horizontally compared to our former model, the HAKKO 493.

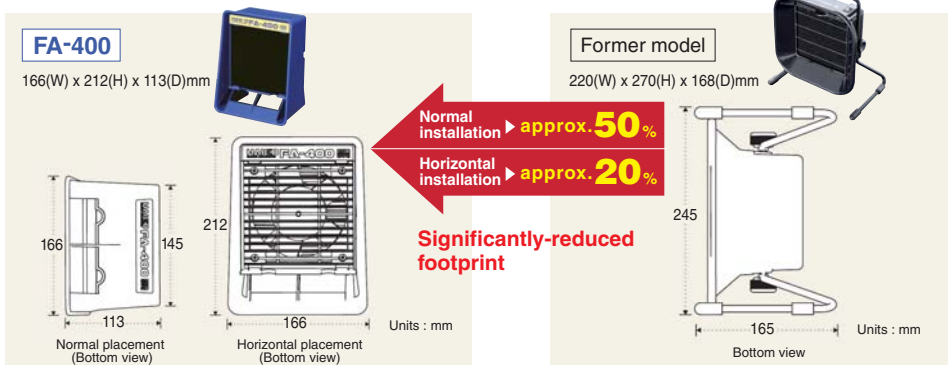

Easy filter replacement



ESD safe by design

Because of ESD safe in design, the FA-400 can be used in the working area where static-sensitive components are processed.

Specifications

● HAKKO FA-400

Model name	HAKKO FA-400
Power consumption	50Hz 15W(100V) 18W(110V) 19W(220V) 22W(230V) 24W(240V) 60Hz 13W(100V) 15W(110V) 16W(220V) 18W(230V) 19W(240V)
Airflow*	normal 1.0m³/min.(50Hz) 1.1m³/min.(60Hz) horizontal 0.4m³/min.(50Hz) 0.5m³/min.(60Hz)
Flow rate*	normal 1.0m/s(50Hz) 1.1m/s(60Hz) horizontal 2.6m/s(50Hz) 2.9m/s(60Hz)
Dimensions	166(W) x 212(H) x 113(D)mm
Weight	930g
Accessory	Filter(1pc)

*with filter

● Filter

Size 130(W) x 130(H) x 10(D)mm

Packing List

● Unit 1 ● Filter 1

Replacement and Optional Parts

Part No.	Name/Description
A1001	Activated-carbon filter/set of 5
C1568	Arm stand w/knobs(set of 2,ESD)
B1166	Knob/set of 2,ESD

HAKKO
HAKKO CORPORATION
OVERSEAS AFFILIATES

U.S.A.
AMERICAN HAKKO PRODUCTS, INC.
28920 N. AVE. WILLIAMS VALENCIA, CA 91355, U.S.A.
TEL: (661) 294-0090 FAX: (661) 294-0096
Toll Free (800)88-HAKKO
http://www.hakkousa.com

HEAD OFFICE

4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN
TEL:+81-6-6561-3225 FAX:+81-6-6561-8466
http://www.hakko.com E-mail:sales@hakko.com

HONG KONG
HAKKO DEVELOPMENT CO., LTD.
ROOM 1504, EASTERN HARBOUR CENTRE,
28 HOI CHAK STREET, QUARRY BAY, HONG KONG.
TEL: 2811-5588 FAX: 2590-0217
http://www.hakko.com.hk
E-mail:info@hakko.com.hk

SINGAPORE
HAKKO PRODUCTS PTE., LTD.
1, GENTING LINK #02-04, PERFECT INDUSTRIAL
BUILDING, SINGAPORE 349518
TEL: 6748-2277 FAX: 6744-0033
http://www.hakko.com.sg
E-mail:sales@hakko.com.sg

Please access to the following for the other Sales affiliates.
<http://www.hakko.com>

Specifications and design are subject to change without notice. Copyright Hakko Corporation. All right reserved.

CA00343BbHb001 Nov.2009