



MODULAR JACKS AND PLUGS: GDLX Series

Right Angle Modular Jack

Product Features

Available in high temp for Reflow compatibility
Panel Stops, Shielding and Keying Options Available
Snap-In Board Retention Tabs
CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material

PBT Thermoplastic, Glass Filled, UL 94V-0 Rated,
Black Color

Shield Material

Copper Alloy, Nickel Plated

Contact Material

Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms Min.

Dielectric Withstanding Voltage

1000V AC for 1 Minute

Contact Resistance

20 milliohms Max.

Current Rating

1.5A

Voltage Rating

125V DC

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

	-			
Series		Shield Option	Positions & Contacts	Plating Option

Series

GDLX - Right Angle Modular Jack PCB Mount

Shield Options

A - With Panel Stops, Non-Shielded

N - Without Panel Stops, Non-Shielded

S - With Panel Stops, Shielded

Number of Positions / Contacts

64 - 6 Positions / 4 Contacts

66 - 6 Positions / 6 Contacts

88 - 8 Positions / 8 Contacts

Plating Option

Blank - Gold Flash


50 - 50μ" Gold Plating

Contact Kycon for Keyed and other Options

GDLX Series

Dimensions in mm

GDLX-A-64

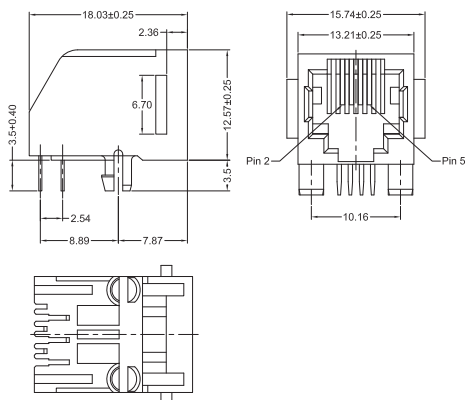

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kycon:

[GDLX-SMT-A-64](#) [GDLX-SMT-A-66](#) [GDLX-SMT-A-88](#) [GDLX-A-88-50](#) [GDLX-SMT-S-88K-50](#) [GDLX-A-64-50](#) [GDLX-A-66-50](#) [GDLX-S-88](#) [GDLX-N-66-50](#) [GDLX-N-64](#) [GDLX-N-66](#) [GDLX-N-88](#) [GDLX-SMT-A-66-50](#) [GDLX-N-88K-50](#) [GDLX-A-88K-50](#) [GDLX-S-88K-50](#) [GDLX-SMT-A-88-50](#) [GDLX-SMT-N-66](#) [GDLX-SMT-N-64](#) [GDLX-SMT-N-88](#) [GDLX-N-88K](#) [GDLX-SMT-S-88-50](#) [GDLX-S-88-50](#) [GDLX-SMT-N-88-50](#) [GDLX-N-64-50](#) [GDLX-A-66](#) [GDLX-A-64](#) [GDLX-A-88](#) [GDLX-N-88-50](#) [GDLX-A-88K](#) [GDLX-SMT-S-88](#) [GDLX-SMT-S-66](#) [GDLX-SMT-A-64-50](#) [GDLX-SMT-N-64-50](#) [GDLX-SMT-S-66-50](#) [GDLX-S-88K](#) [GDLX-SMT-N-66-50](#) [GDLX-S-66](#) [GDLX-S-64](#) [GDLXHT-N-66](#) [GDLXHT-A-88](#) [GDLX-SMT-S-64](#) [GDLXHT-S-64-50](#) [GDLXHT-N-88-50](#) [GDLXHT-A-64-50](#) [GDLX-S-64-50](#) [GDLX-SMT-S-64-50](#) [GDLXHT-S-88](#) [GDLXHT-A-64](#) [GDLXHT-N-88](#) [GDLX-SA-88K-50](#) [GDLX-SMT-S-88K](#) [GDLXHT-S-66](#) [GDLX-S-66-50](#) [GDLXHT-N-66-50](#) [GDLXHT-S-64](#) [GDLXHT-S-88-50](#) [GDLXHT-S-66-50](#) [GDLXHT-N-64](#) [GDLX-SA-88K](#) [GDLXHT-A-88-50](#) [GDLX-SA-88](#) [GDLX-A-62](#) [GDLXHT-A-66](#) [GDLX-SA-88-50](#) [GDLXHT-N-64-50](#) [GDLXHT-A-66-50](#) [GDLX-N-62-50](#) [GDLX-A-62-50](#) [GDLX-N-82](#)