

RF TRANSFORMER

Low Profile Transformer for Wideband RF Applications



-  Miniature surface mount package
-  Excellent insertion loss
-  Various Frequencies and Ratios

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C



Part Number	Impedance Ratio (Pri:Sec)	Turns Ratio (Pri:Sec)	Insertion Loss ¹ (dB TYP)			Return Loss (dB TYP)						
			3 dB	2 dB	1 dB	0.3 MHz	50 MHz	100 MHz	150 MHz	200 MHz	300 MHz	-
CX2141	4CT:1CT	2CT:1CT	.3-300	.4-200	.5-90	-4	-15	-16	-13	-10	-6	-
CX2157	1:1CT	1:1CT	.4-800	.5-700	1-600	400 KHz	1 MHz	10 MHz	50 MHz	200 MHz	400 MHz	800 MHz
						-13	-18	-28	-26	-16	-10	-7
CX2158	1:4CT	1:2CT	2-775	3-600	6-250	2 KHz	6 MHz	58 MHz	106 MHz	250 MHz	775 MHz	-
						-16	-22	-21	-20	-16	-6	-

NOTE 1: Referenced to Mid-band Frequency - Input Impedance: 75Ω

Mechanical

Schematics

CX2141/CX2157/CX2158

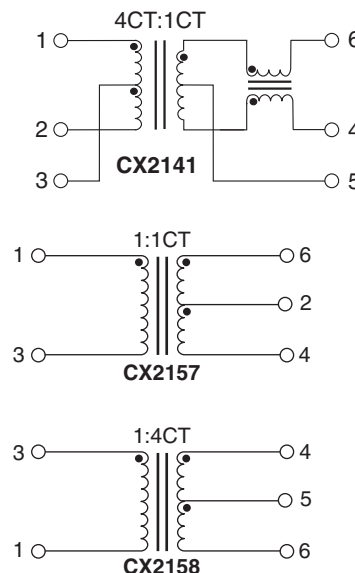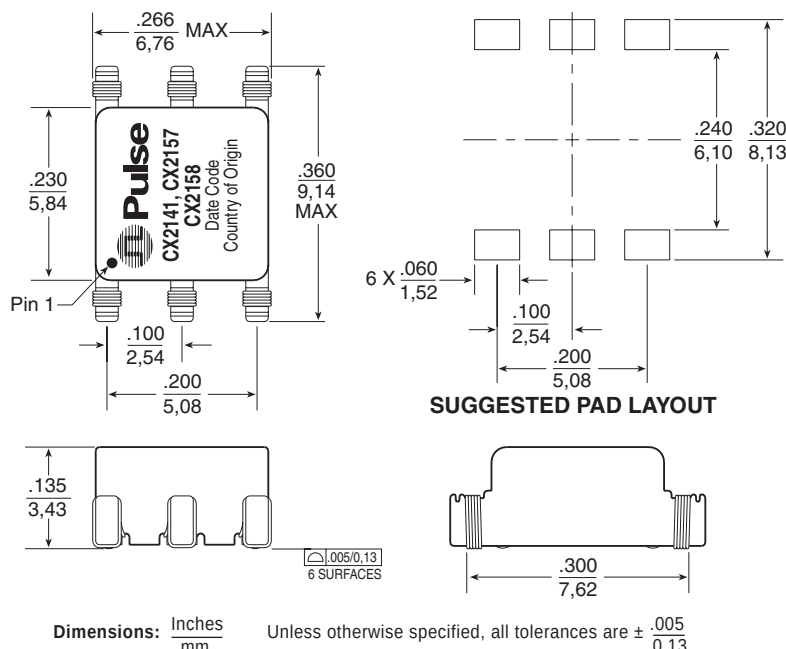

Weight0.17 grams
Tape & Reel1500 /reel
Tube60 /tube

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	9/F, Phase 2, Tai Sang Shatin Warehouse Centre 6 Wong Chuk Yeung Street Fotan, Shatin, Hong Kong TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.