


HEX NYLON TAPPED SPACERS

561-L4.25, 561-L4.375, 561-L4.50, 561-L4.75, 561-L41.0, 561-L6.25, 561-L6.375, 561-L6.50, 561-L6.75, 561-L61.0, 561-L8.25, 561-L8.375, 561-L8.50, 561-L8.75, 561-L81.0, 561-L4.875, 561-L6.875, 561-L8.875, 561-L4.625, 561-L6.625, 561-L8.625, 561-14HTSP023, 561-L61.5

Date Last Revised: 1/7/13

DIMENSIONS: in(mm.)

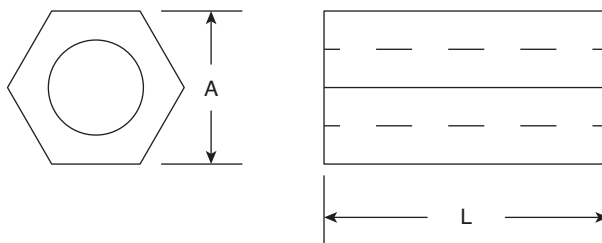

MOUSER STOCK NO.	Description	L	A	Tapped
561-L4.25	HTSP 1	0.250 (±.015)	0.250 (±.015)	4-40
561-L4.375	HTSP 2	0.375 (±.015)	0.250 (±.015)	4-40
561-L4.50	HTSP 3	0.500 (±.015)	0.250 (±.015)	4-40
561-L4.75	HTSP 4	0.750 (±.015)	0.250 (±.015)	4-40
561-L41.0	HTSP 5	1.000 (±.015)	0.250 (±.015)	4-40
561-L6.25	HTSP 6	0.250 (±.015)	0.250 (±.015)	6-32
561-L6.375	HTSP 7	0.375 (±.015)	0.250 (±.015)	6-32
561-L6.50	HTSP 8	0.500 (±.015)	0.250 (±.015)	6-32
561-L6.75	HTSP 9	0.750 (±.015)	0.250 (±.015)	6-32
561-L61.0	HTSP 10	1.000 (±.015)	0.250 (±.015)	6-32
561-L8.25	HTSP 11	0.250 (±.015)	0.250 (±.015)	8-32
561-L8.375	HTSP 12	0.375 (±.015)	0.250 (±.015)	8-32
561-L8.50	HTSP 13	0.500 (±.015)	0.250 (±.015)	8-32
561-L8.75	HTSP 14	0.750 (±.015)	0.250 (±.015)	8-32
561-L81.0	HTSP 15	1.000 (±.015)	0.250 (±.015)	8-32
561-L4.875	HTSP 16	0.875 (±.015)	0.250 (±.015)	4-40
561-L6.875	HTSP 17	0.875 (±.015)	0.250 (±.015)	6-32
561-L8.875	HTSP 18	0.875 (±.015)	0.250 (±.015)	8-32
561-L4.625	HTSP 19	0.625 (±.015)	0.250 (±.015)	4-40
561-L6.625	HTSP 20	0.625 (±.015)	0.250 (±.015)	6-32
561-L8.625	HTSP 21	0.625 (±.015)	0.250 (±.015)	8-32
561-14HTSP023	HTSP 23	1.250 (±.015)	0.250 (±.015)	6-32
561-L61.5	HTSP 36	1.500 (±.015)	0.250 (±.015)	6-32
RoHS Compliant				

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

EPD-200914

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eagle Plastic Devices:

[561-L61.5](#) [561-L8.75](#) [561-L8.875](#) [561-L81.0](#) [561-L6.875](#) [561-L6.75](#) [561-14HTSP023](#) [561-L4.75](#) [561-L4.625](#) [561-L4.375](#) [561-L4.50](#) [561-L4.875](#) [561-L4.25](#) [561-L6.625](#) [561-L6.375](#) [561-L6.25](#) [561-L41.0](#) [561-L6.50](#) [561-L61.0](#) [561-L8.25](#) [561-L8.625](#) [561-L8.50](#) [561-L8.375](#)