





58

TERMINAL TYPES (The thickness of terminal is 0.6)


A TYPE




B TYPE




G TYPE

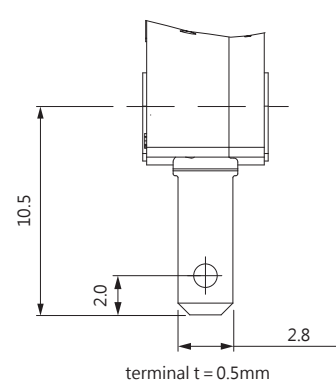


C TYPE



D TYPE



P TYPE



ORDERING INFORMATION

S	M	1	—	0	6	S	—	0	0	A	—	0	—	Z
SERIES PREFIX	CODE	RATING CURRENT		CODE	OPERATING FORCE	CODE	ACTUATOR TYPE	CODE	TERMINAL TYPE	CODE	CONTACT ARRANGEMENT		CODE	ROHS CODE
	P1	0.1A 125/250VAC		S	STANDARD	00		A		0	S.P.D.T			
	06	6A 125/250VAC 6(2)A 125/250VAC		L	LIGHT	01		B		1	S.P.S.T NO			
	10	10.1A 125/250VAC 6(2)A 125/250VAC ONLY S/H FORCE		D	SLIGHT	02		C		2	S.P.S.T NC			
	16	16A 125/250VAC 6(3)A 125/250VAC ONLY H FORCE		H	HEAVIER	03		D						
	C5	5A 125/250VAC				04		P						
	C3	3A 125/250VAC				05		G						
	C1	0.1A 125/250VAC				06								
						07								
						08								
						09								

MICRO SWITCHES