





DUAL-IN-LINE SOCKETS

SERIES 117, 127, 217, 227, 317, 327 • SHRINK DIP, SOLDER TAIL & WRAPOST

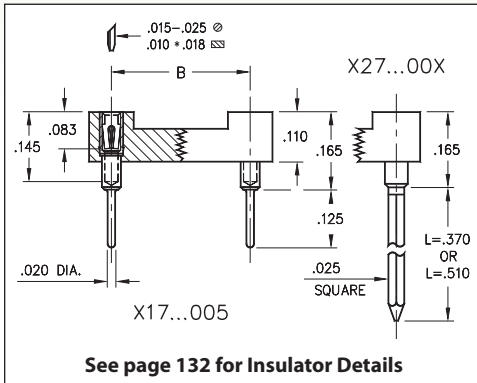

- High density DIP sockets and strips for devices featuring .070" lead spacing
- Solder tails use MM #1802 receptacles, See page 169 for details. Wraposts use MM #1702-2 or 1703-3 receptacles, See page 198 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

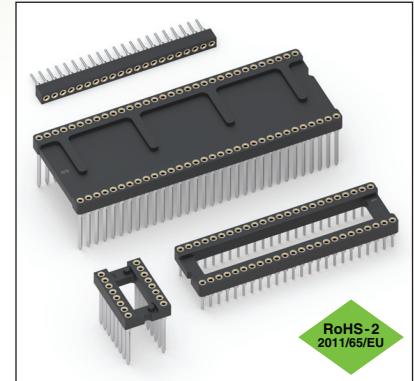

Total number of pins				Quantity per tube	ORDERING INFORMATION								
	A	B	C		Solder Tail	L = .370 (2 Level Wrapost)	L = .510 (3 Level Wrapost)						
					OPEN FRAME DIP SOCKET								
16	0.572	0.3	0.39	35	117-XX-316-41-005000	127-XX-316-41-002000	127-XX-316-41-003000						
28	0.992	0.4	0.49	20	117-XX-428-41-005000	127-XX-428-41-002000	127-XX-428-41-003000						
30	1.062	0.4	0.49	18	117-XX-430-41-005000	127-XX-430-41-002000	127-XX-430-41-003000						
48	1.692	0.4	0.49	12	117-XX-448-41-005000	127-XX-448-41-002000	127-XX-448-41-003000						
20	0.712	0.6	0.69	28	117-XX-620-41-005000	127-XX-620-41-002000	127-XX-620-41-003000						
28	0.992	0.6	0.69	20	117-XX-628-41-005000	127-XX-628-41-002000	127-XX-628-41-003000						
40	1.412	0.6	0.69	14	117-XX-640-41-005000	127-XX-640-41-002000	127-XX-640-41-003000						
42	1.482	0.6	0.69	13	117-XX-642-41-005000	127-XX-642-41-002000	127-XX-642-41-003000						
48	1.692	0.6	0.69	11	117-XX-648-41-005000	127-XX-648-41-002000	127-XX-648-41-003000						
52	1.832	0.6	0.69	11	117-XX-652-41-005000	127-XX-652-41-002000	127-XX-652-41-003000						
56	1.972	0.6	0.69	10	117-XX-656-41-005000	127-XX-656-41-002000	127-XX-656-41-003000						
64	2.252	0.6	0.69	8	117-XX-664-41-005000	127-XX-664-41-002000	127-XX-664-41-003000						
68	2.392	0.6	0.69	8	117-XX-668-41-005000	127-XX-668-41-002000	127-XX-668-41-003000						
64	2.252	0.75	0.84	8	117-XX-764-41-005000	127-XX-764-41-002000	127-XX-764-41-003000						
					CLOSED FRAME DIP SOCKET								
64	2.252	0.75	0.84	8	217-XX-764-41-005000	227-XX-764-41-002000	227-XX-764-41-003000						
					SINGLE ROW STRIP SOCKET								
					If desired, we will supply any length up to 21 pins.								
21	1.482	---	.104	-	317-XX-121-41-005000	327-XX-121-41-002000	327-XX-121-41-003000						
XX=Plating Code See to Right					SPECIFY PLATING CODE XX=		91	93		41	43	47	
					Sleeve (Pin)			200 μ" Sn/Pb	200 μ" Sn/Pb		200 μ" Sn	200 μ" Sn	200 μ" Sn
					Contact (Clip)			10 μ" Au	30 μ" Au		10 μ" Au	30 μ" Au	Au Flash



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[317-93-121-41-005000](#) [217-93-764-41-005000](#) [117-43-764-41-005000](#) [117-43-668-41-005000](#) [117-43-664-41-005000](#) [117-43-656-41-005000](#) [117-43-652-41-005000](#) [117-43-648-41-005000](#) [117-43-642-41-005000](#) [117-43-640-41-005000](#) [117-43-628-41-005000](#) [117-43-620-41-005000](#) [117-43-448-41-005000](#) [117-43-430-41-005000](#) [117-43-428-41-005000](#) [117-43-316-41-005000](#) [317-93-103-41-005000](#) [117-93-764-41-005000](#) [117-93-628-41-005000](#) [117-93-620-41-005000](#) [117-93-652-41-005000](#) [117-93-640-41-005000](#) [117-93-648-41-005000](#) [117-93-668-41-005000](#) [117-93-642-41-005000](#) [117-93-664-41-005000](#) [117-93-656-41-005000](#) [317-93-108-41-005000](#) [117-93-428-41-005000](#) [117-93-448-41-005000](#) [117-93-316-41-005000](#) [117-93-430-41-005000](#) [127-93-764-41-003000](#) [127-93-764-41-002000](#) [127-93-668-41-003000](#) [127-93-668-41-002000](#) [127-93-664-41-003000](#) [127-93-664-41-002000](#) [127-93-656-41-003000](#) [127-93-656-41-002000](#) [127-93-652-41-003000](#) [127-93-652-41-002000](#) [127-93-648-41-003000](#) [127-93-648-41-002000](#) [127-93-642-41-003000](#) [127-93-642-41-002000](#) [127-93-640-41-003000](#) [127-93-640-41-002000](#) [127-93-628-41-003000](#) [127-93-628-41-002000](#) [127-93-620-41-003000](#) [127-93-620-41-002000](#) [127-93-448-41-003000](#) [127-93-448-41-002000](#) [127-93-430-41-003000](#) [127-93-430-41-002000](#) [127-93-428-41-003000](#) [127-93-428-41-002000](#) [127-93-316-41-003000](#) [127-93-316-41-002000](#) [317-43-121-41-005000](#) [217-43-764-41-005000](#) [127-43-764-41-003000](#) [127-43-764-41-002000](#) [127-43-668-41-003000](#) [127-43-668-41-002000](#) [127-43-664-41-003000](#) [127-43-664-41-002000](#) [127-43-656-41-003000](#) [127-43-656-41-002000](#) [127-43-652-41-003000](#) [127-43-652-41-002000](#) [127-43-648-41-003000](#) [127-43-648-41-002000](#) [127-43-642-41-003000](#) [127-43-642-41-002000](#) [127-43-640-41-003000](#) [127-43-640-41-002000](#) [127-43-628-41-003000](#) [127-43-628-41-002000](#) [127-43-620-41-003000](#) [127-43-620-41-002000](#) [127-43-448-41-003000](#) [127-43-448-41-002000](#) [127-43-430-41-003000](#) [127-43-430-41-002000](#) [127-43-428-41-003000](#) [127-43-428-41-002000](#) [127-43-316-41-003000](#) [127-43-316-41-002000](#) [317-43-116-41-005000](#) [117-41-652-41-105000](#) [117-93-668-61-005000](#) [117-41-620-41-105000](#) [117-93-430-61-005000](#) [117-43-316-61-105000](#) [117-43-668-61-005000](#) [117-91-640-41-005000](#) [117-43-628-61-105000](#) [117-91-448-41-005000](#)