


“EZ” Twist Lock on Fin Clip Base

561-EZFB025, 561-EZF37B37, 561-EZFB050,
561-EZ37C62, 561-EZ50C37, 561-EZ50C50,
561-EZ50C62, 561-EZ50C100, 561-EZ62C37,
561-EZ62C50, 561-EZ62C62, 561-EZ62C100

Date Last Revised: 11-8-10

DIMENSIONS: IN.

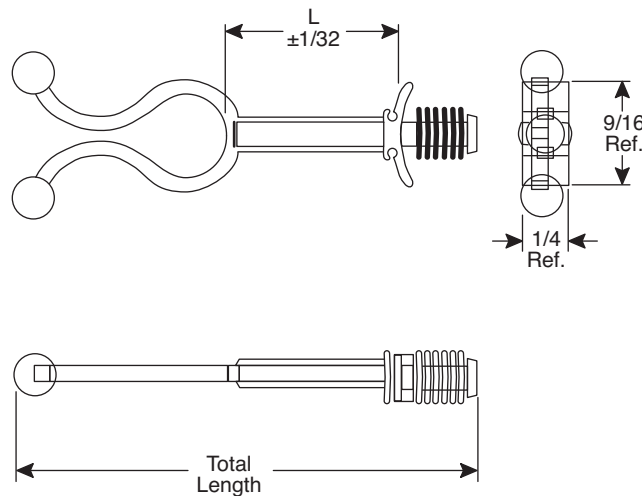

SPECIFICATIONS

Material:	Molded in Natural Nylon 6/6
RoHS Compliant	

Part Number	Description	Bundle Diameter	Length	Total Length	Mounting Hole	Panel Range
561-EZFB025	1/32 - 1/4	0.375 (+/-0.015)	0.200 (+/-0.0031)	1.656 (ref.)	0.187 (+/-0.005)	1/32 - 1/4
561-EZF37B37	1/32 - 1/4	0.375 (+/-0.015)	0.315 (+/-0.0031)	1.781 (ref.)	0.187 (+/-0.005)	1/32 - 1/4
561-EZFB050	1/32 - 1/4	0.375 (+/-0.015)	0.437 (+/-0.0031)	1.906 (ref.)	0.187 (+/-0.005)	1/32 - 1/4
561-EZ37C62	1/32 - 1/4	0.375 (+/-0.015)	0.555 (+/-0.0031)	2.031 (ref.)	0.187 (+/-0.005)	1/32 - 1/4
561-EZ50C37	1/32 - 1/4	0.500 (+/-0.015)	0.318 (+/-0.0031)	1.844 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ50C50	1/32 - 1/4	0.500 (+/-0.015)	0.447 (+/-0.0031)	1.984 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ50C62	1/32 - 1/4	0.500 (+/-0.015)	0.596 (+/-0.0031)	2.125 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ50C100	1/32 - 1/4	0.500 (+/-0.015)	0.942 (+/-0.0031)	2.469 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ62C37	1/32 - 1/4	0.625 (+/-0.015)	0.319 (+/-0.0031)	1.937 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ62C50	1/32 - 1/4	0.625 (+/-0.015)	0.442 (+/-0.0031)	2.047 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ62C62	1/32 - 1/4	0.625 (+/-0.015)	0.595 (+/-0.0031)	2.187 (ref.)	0.250 (+/-0.005)	1/32 - 1/4
561-EZ62C100	1/32 - 1/4	0.625 (+/-0.015)	0.935 (+/-0.0031)	2.547 (ref.)	0.250 (+/-0.005)	1/32 - 1/4

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

EPD-200892

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eagle Plastic Devices:

[561-EZFB025](#) [561-EZF37B37](#) [561-EZ37C62](#) [561-EZ62C62](#) [561-EZ62C37](#) [561-EZ62C50](#) [561-EZ62C100](#) [561-EZ50C50](#) [561-EZ50C37](#) [561-EZ50C62](#) [561-EZ50C100](#)