

MICRO SWITCH

A DIVISION OF ANNAPOLIS-HONEYWELL-REGULATOR COMPANY
FARGO, ILLINOIS

ASSEMBLY-SWITCH

CATALOG LISTING

IACI

S

(M) IACI ISSUE 14

REPLACES

IACI

M

DRAWING NUMBER

1516

ISSUE

RELEASE NO.

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

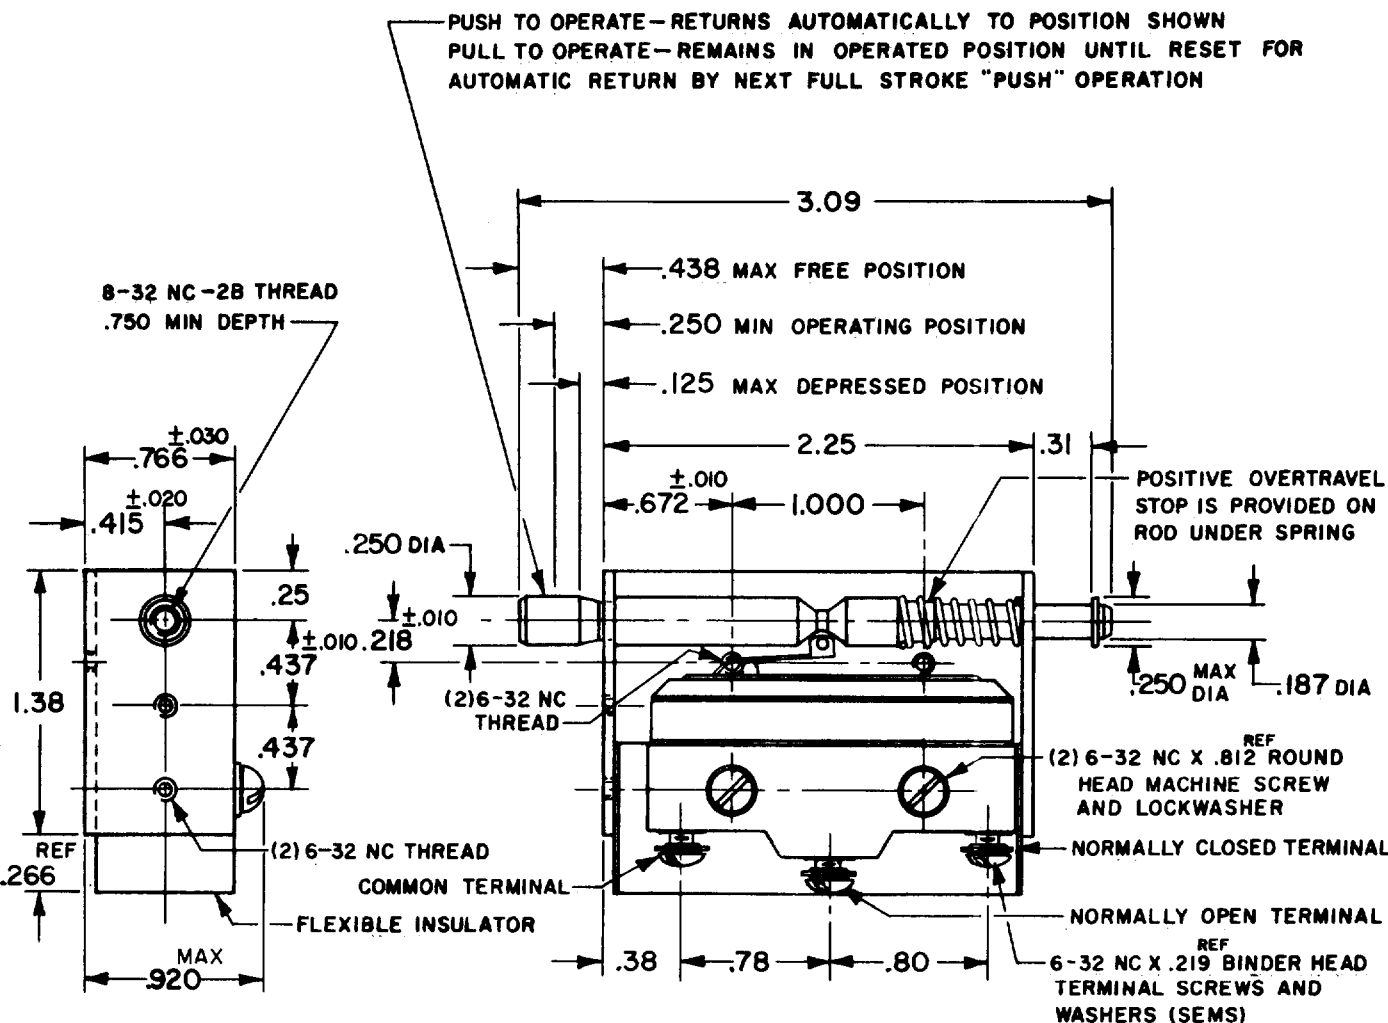

NOTE

- 1—UNIT INCLUDES (1) CAT. LIST BZ-7RLT7II BASIC SWITCH
- 2—NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

TOTAL TRAVEL—.312 APPROX PUSH DIRECTION
.312 APPROX PULL DIRECTION

FULLY DEPRESSED FORCE-----3 1/2 LBS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

BREAK DISTANCE
.070 MIN

15 A-125, 250 OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

SCALE----- FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT----- .190 LB

74-98

DRAWN

D.A.W. 1, DEC. '55