



Undervoltage release

Part no.

U-PKZ0(230V50HZ)



Powering Business Worldwide™

Article no.

073135

Program

Contact sequence			
Connection technique			Screw terminals
Actuating voltage			230 V 50 Hz
For use with			PKZM0 PKZM4 PKZM0-T PKM0 PKZM01 PKE
Notes Can be fitted to the left of: Motor-protective circuit-breakers Cannot be combined with: A-PKZ0 shunt release When combined with circuit-breaker, can be used as emergency-stop device to IEC/EN 60204.			

Approbationen

UL approval	Yes
CSA approval	Yes
Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	12528
CSA Class No.	3211-05
NA Certification	UL listed, CSA certified
Specially designed for NA	No

General

Terminal capacities		mm ²	
Solid or flexible conductor with ferrule		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Solid or stranded		AWG	1 x (18 - 14) 2 x (18 - 14)

Main conducting paths

Rated operating voltage	U _e	V AC	42 - 480
Rated operating voltage	U _e	V DC	24 - 250

Pick-up-/drop-out voltage

Pick-up voltage		x U _s	0.85 - 1.1
Drop-out voltage	x U _s	V	0.7 - 0.35

Power consumption

AC			
Pick-up AC	Pick-up	VA	5
Sealing AC	Sealing	VA	3

Technical data according to ETIM 4.0


Delayed			No
Suitable for load-break switches			No
Suitable for overload relays			No
Design of electrical connection			Screw connection
Rated control voltage Us at AC 50 Hz		V	230
Rated control voltage Us at AC 60 Hz		V	0
Rated control voltage Us at DC		V	0
Suitable for motor protective circuit breakers			YES
Suitable for circuit breakers			No
Voltage type for actuation			AC
Number of contacts as N/C			0
Number of contacts as N/O			0
Number of changeover contacts			0

CAD-Data

Product standards CAD data:

<http://eaton-moeller.partcommunity.com>

Dimensions

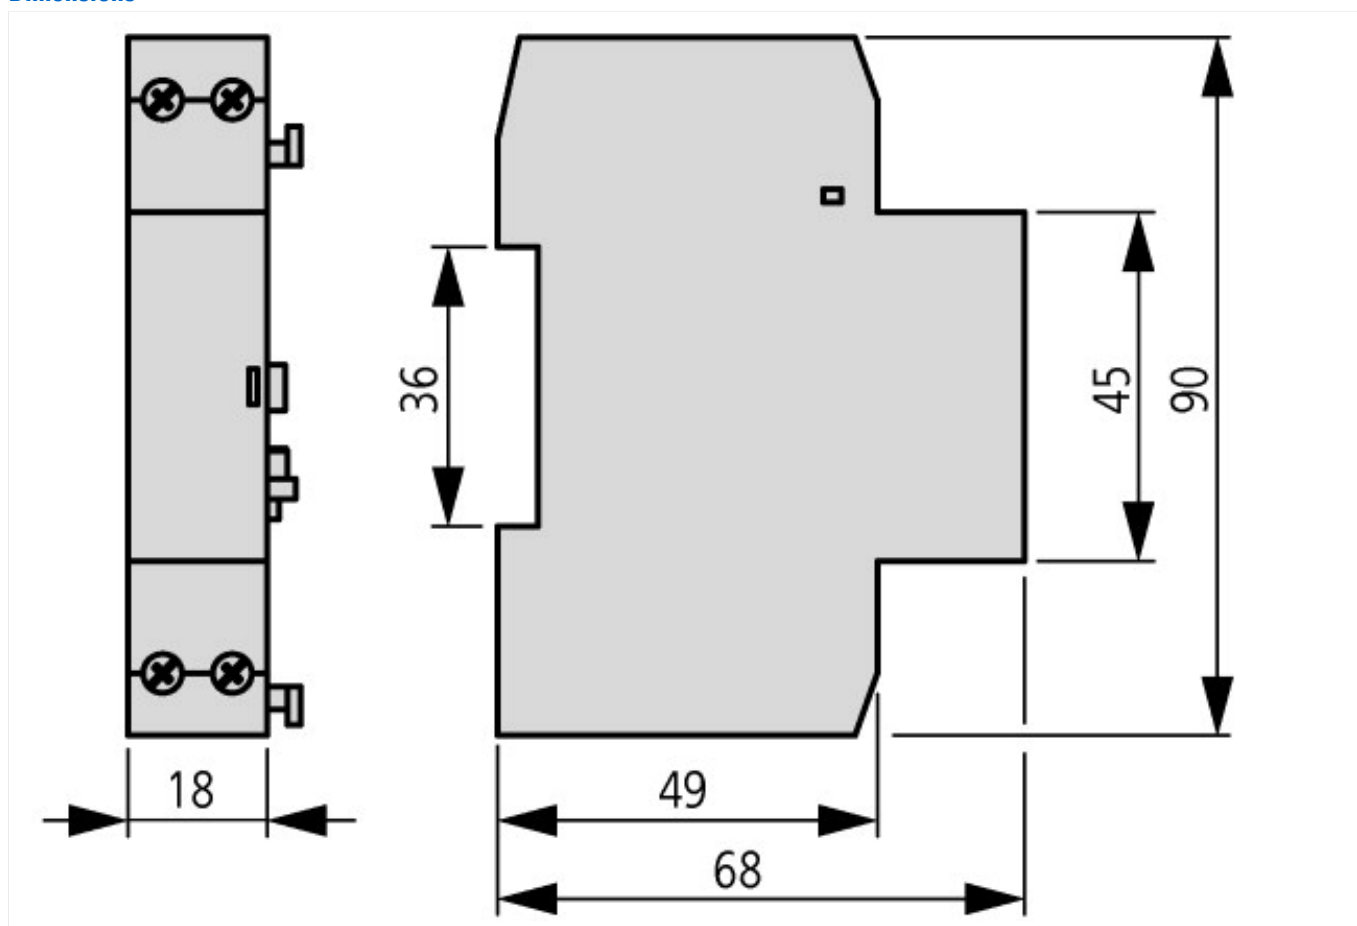

Additional product information (links)

IL03402034Z (IL03402034Z) Motor-protective circuit-breaker, Starter	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402034Z2010_10.pdf
IL03407011Z (IL03407011Z) Motor-protective circuit-breaker	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407011Z2010_08.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf

