



## F1238-S series

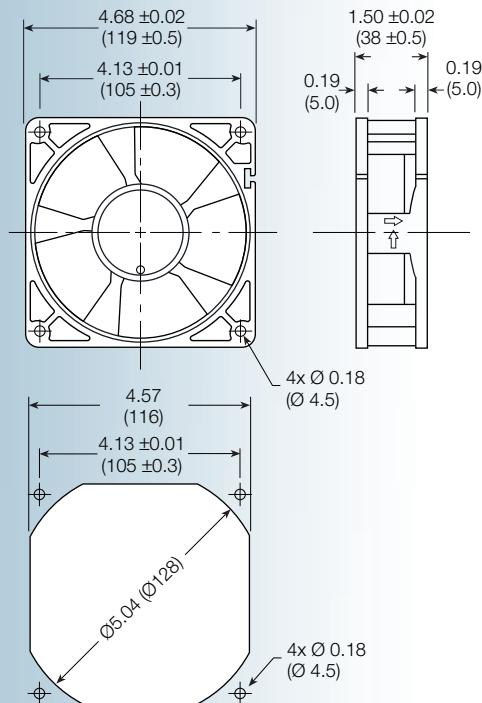

**Size: (119 x 119 x 38 mm)  
4.69 x 4.69 x 1.5 inches**

- Broad range of models to meet air flow and sound noise targets
- Electronic locked rotor sensor, auto-restart, reverse polarity protection
- 5, 12, 24 or 48 VDC
- Lead wires or terminal version; reinforced flanged frame; ball bearings
- Options include tachometer or locked rotor output signal

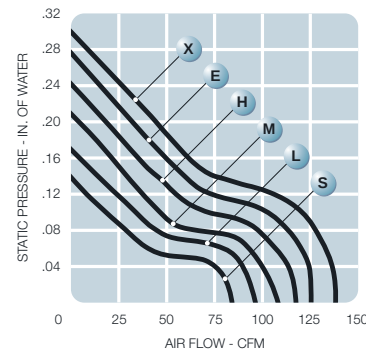

| Model No.       | Rated Voltage V | Current mA |     |     |     | Revolution RPM | Air Volume CFM | Maximum Static Pressure (in H <sub>2</sub> O) | Sound Noise dBA | Weight oz |
|-----------------|-----------------|------------|-----|-----|-----|----------------|----------------|-----------------------------------------------|-----------------|-----------|
|                 |                 | 5          | 12  | 24  | 48  |                |                |                                               |                 |           |
| <b>F1238S-S</b> | 5/12/24/48      | 520        | 180 | 90  | 60  | 1,800          | 83             | 0.14                                          | 34              | 8.58      |
| <b>F1238L-S</b> | 5/12/24/48      | 800        | 290 | 145 | 80  | 2,050          | 94             | 0.17                                          | 36              | 8.58      |
| <b>F1238M-S</b> | 12/24/48        | -          | 360 | 180 | 120 | 2,300          | 105            | 0.21                                          | 38              | 8.58      |
| <b>F1238H-S</b> | 12/24/48        | -          | 440 | 220 | 140 | 2,500          | 115            | 0.25                                          | 41              | 8.58      |
| <b>F1238E-S</b> | 12/24/48        | -          | 700 | 350 | 210 | 2,800          | 126            | 0.28                                          | 43              | 8.58      |
| <b>F1238X-S</b> | 12/24           | -          | 950 | 500 | -   | 3,100          | 140            | 0.30                                          | 45              | 8.58      |

\* Available with quick disconnect terminal block.