

1

2

3

4

5

6

7

8

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 507)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: PHOSPHOR BRONZE(SIGNAL CONTACT)

BRASS (POWERS CONTACT)

-ACCESSORIES: BRASS

-SHELLS: STEEL

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A (SIGNAL CONTACT)

30A or 40A (POWER CONTACT)

-CONTACT RESISTANCE: <=7.3 m Ohms(SIGNAL and POWER)

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/21

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 21 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum

- Female screw : 0.5 N.m minimum

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in GS-22-008.

- The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board. See application notes/procedures if they are available.

- Termination plating spec:

- Signal contacts: Ni + Gold

- Power contacts: Ni 1.27µm+Sn 2.5 to 7.5µ,pure bright

- Active area plating spec:

- Signal and power contacts: Ni + Gold

- Shell plating :2 to 4µm Cu + nickel + 3 to 10µmm Sn,pure bright

- Accessories: Sn pure bright + nickel

- Packaging spec: See GS-14-920

Series

Shell size: E A B C D (see sheet 3)

Front accessory definition (see sheet 2)

blank:without accessory

L :threaded insert M3

O :threaded insert UNC 4-40

V :female screw UNC 4-40

Layout of contacts (see sheet 3)

Contacts

S :Socket

Termination type

5 Right angle/Europe standard

Plating

00 200 matings/unmatings

43 500 matings/unmatings

PCB accessories definition(see sheet 2)

A :without accessory

H :Metal brackets+harpoons for PCB 2.40mm

G :Metal brackets+harpoons for PCB 1.60mm

M :Metal brackets

Power contacts

00 :Not fitted with power contact (signal contacts always fitted)

30 :Fitted with power contacts 30 Amp.

40 :Fitted with power contacts 40 Amp.

DBL13W3S500G30LF

See note RoHS

TABLE 1:PCB HOLE DIAMETERS

POWER CONTACTS			ACCESSORIES	SIGNAL CONTACT
30 A	2.00	Ø2.40	Ø3.10	Ø0.9 min
40 A	2.80	Ø3.10		
Max current power	ØA ^{+0.1} ₀	PCB HOLE ±0.1	PCB HOLE ±0.1	PCB HOLE

Dr M PESSON 2005-10-11

Eng P LEGARE 2005-10-11

Chr

Appr

rev	ecn no	dr	date
A	LS05-0101	MPE	2005-10-11
B	LS06-0208	LGO	2006-12-12
C	LS07-0273	MPE	2007/10/31
D	F09-0092	LSA	2009/09/16
E	F10-0060	LSA	2010/06/01
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 - ✓

tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection

mm

ANGULAR

LINEAR

0° ±2°

0.X ±0.3

0.XX ±0.1

0.XXX ±0.05

size A2

Scale 2:1

ECN F10-0060

Product family

- Spec ref

FCI

title SUB FEMALE DMW EUROPE

mixed power right angled solder

catalog no

dwg no C01-8639-2300

Rev. E


sheet 1 of 7

13W3 FOR EXAMPLE

Ø A

Copyright FCI.





PDM: Rev:E STATUSReleased Printed: Oct 01, 2010

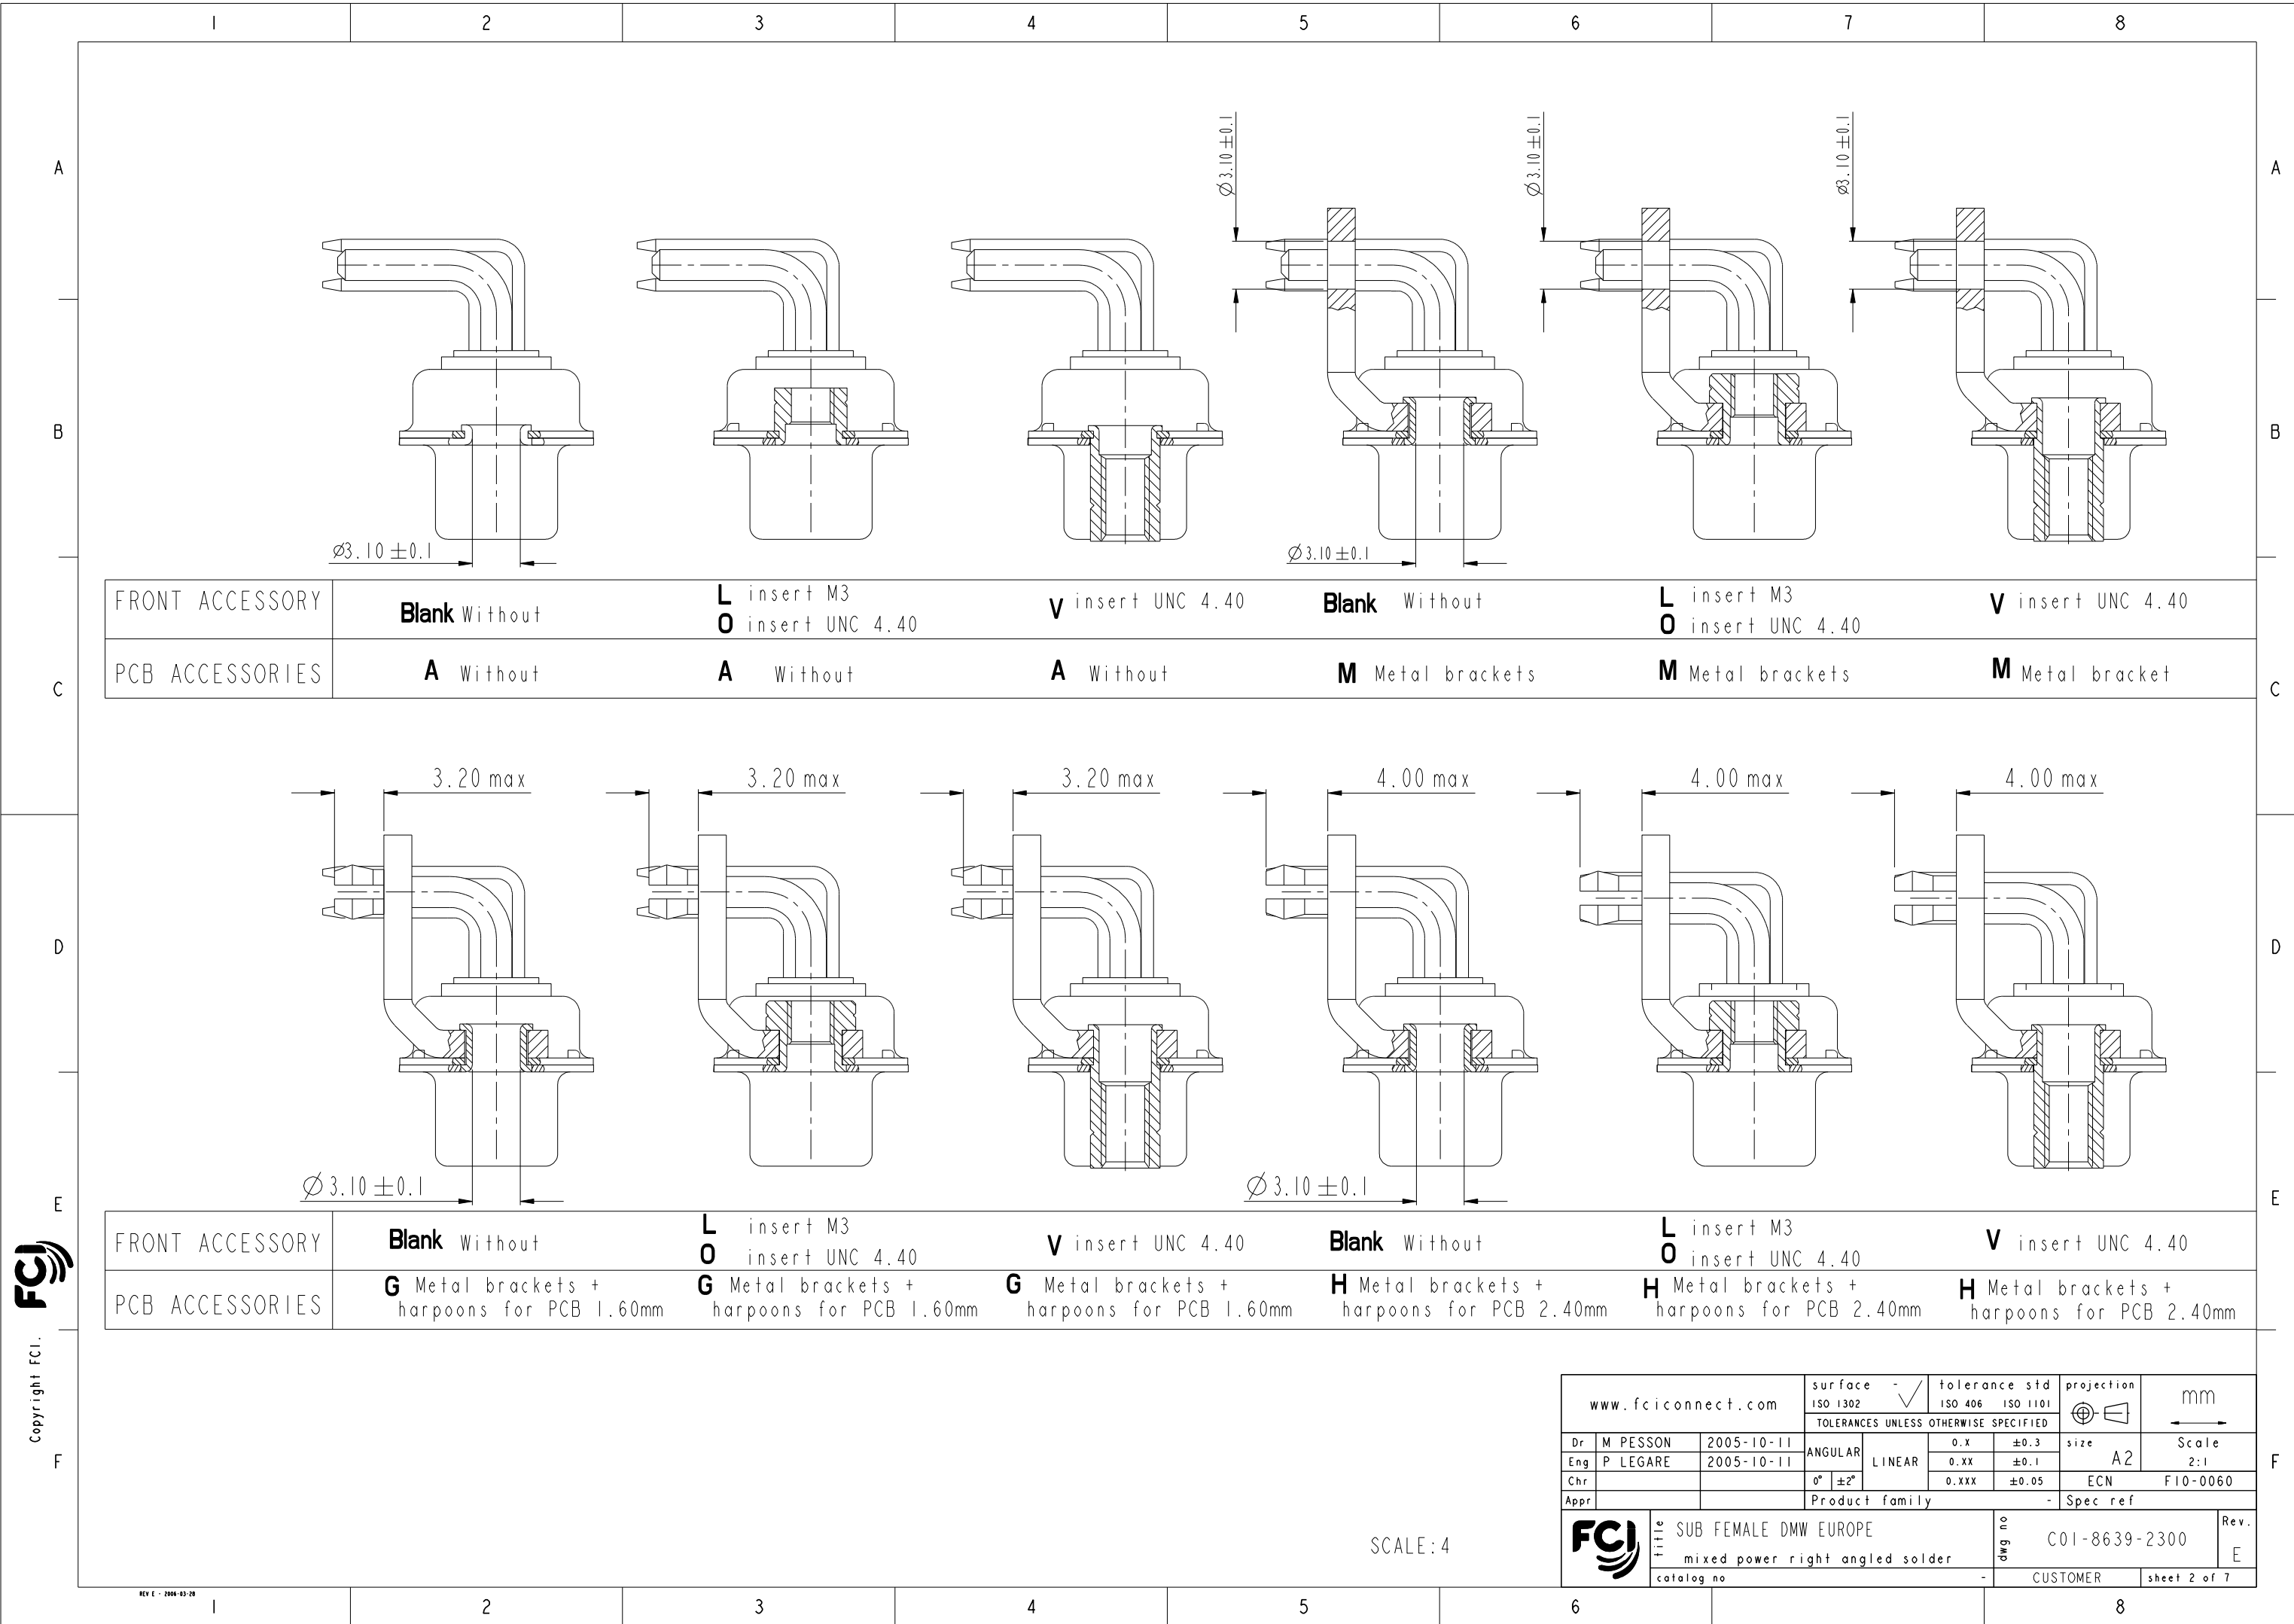

www.fciconnect.com			surface - 		tolerance std		projection		mm		
			ISO 1302		ISO 406 ISO 1101						
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X ±0.3		size A2	Scale 2:1			
Eng	P LEGARE	2005-10-11			0.XX ±0.1						
Chr					0.XXX ±0.05			ECN F10-0060			
Appr			0° ±2°		Product family			- Spec ref			
			SUB FEMALE DMW EUROPE			dwg no			C01-8639-2300		
			mixed power right angled solder						Rev. E		
catalog no						CUSTOMER			sheet 2 of 7		





I		2		3		4		5		6		7		8																																																																																							
A	<table><tr><td>PART</td><td>NUMBER</td><td>AMPS</td><td>MATINGS/ UNMATINGS</td><td>FRONT ACCESSORY</td><td>PCB ACCESSORIES</td></tr><tr><td>D*xWxS500A30LF</td><td>30</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A30LF</td><td>30</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*LxWxS500G30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>															PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A30LF	30	200	without	without	D*LxWxS500A30LF	30	200	insert M3	without	D*OxWxS500A30LF	30	200	insert UNC 4.40	without	D*VxWxS500A30LF	30	200	female screw UNC 4.40	without	D*xWxS500H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm	D*LxWxS500G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M30LF	30	200	without	metal bracket	D*LxWxS500M30LF	30	200	insert M3	metal bracket	D*OxWxS500M30LF	30	200	insert UNC 4.40	metal bracket	D*VxWxS500M30LF	30	200	female screw UNC 4.40	metal bracket
	PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																															
	D*xWxS500A30LF	30	200	without	without																																																																																																
	D*LxWxS500A30LF	30	200	insert M3	without																																																																																																
	D*OxWxS500A30LF	30	200	insert UNC 4.40	without																																																																																																
	D*VxWxS500A30LF	30	200	female screw UNC 4.40	without																																																																																																
	D*xWxS500H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*LxWxS500H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*OxWxS500H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*VxWxS500H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*xWxS500G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*LxWxS500G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*OxWxS500G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*VxWxS500G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*xWxS500M30LF	30	200	without	metal bracket																																																																																																
	D*LxWxS500M30LF	30	200	insert M3	metal bracket																																																																																																
D*OxWxS500M30LF	30	200	insert UNC 4.40	metal bracket																																																																																																	
D*VxWxS500M30LF	30	200	female screw UNC 4.40	metal bracket																																																																																																	
B	<table><tr><td>PART</td><td>NUMBER</td><td>AMPS</td><td>MATINGS/ UNMATINGS</td><td>FRONT ACCESSORY</td><td>PCB ACCESSORIES</td></tr><tr><td>D*xWxS500A40LF</td><td>40</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A40LF</td><td>40</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*LxWxS500G40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>															PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A40LF	40	200	without	without	D*LxWxS500A40LF	40	200	insert M3	without	D*OxWxS500A40LF	40	200	insert UNC 4.40	without	D*VxWxS500A40LF	40	200	female screw UNC 4.40	without	D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm	D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M40LF	40	200	without	metal bracket	D*LxWxS500M40LF	40	200	insert M3	metal bracket	D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket	D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket
	PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																															
	D*xWxS500A40LF	40	200	without	without																																																																																																
	D*LxWxS500A40LF	40	200	insert M3	without																																																																																																
	D*OxWxS500A40LF	40	200	insert UNC 4.40	without																																																																																																
	D*VxWxS500A40LF	40	200	female screw UNC 4.40	without																																																																																																
	D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*xWxS500M40LF	40	200	without	metal bracket																																																																																																
	D*LxWxS500M40LF	40	200	insert M3	metal bracket																																																																																																
D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket																																																																																																	
D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket																																																																																																	
C	<table><tr><td>PART</td><td>NUMBER</td><td>AMPS</td><td>MATINGS/ UNMATINGS</td><td>FRONT ACCESSORY</td><td>PCB ACCESSORIES</td></tr><tr><td>D*xWxS543A30LF</td><td>30</td><td>500</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS543A30LF</td><td>30</td><td>500</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS543A30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS543A30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS543H30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS543H30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS543H30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS543H30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS543G30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*LxWxS543G30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS543G30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS543G30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS543M30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS543M30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS543M30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS543M30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>															PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS543A30LF	30	500	without	without	D*LxWxS543A30LF	30	500	insert M3	without	D*OxWxS543A30LF	30	500	insert UNC 4.40	without	D*VxWxS543A30LF	30	500	female screw UNC 4.40	without	D*xWxS543H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS543H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS543H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS543H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS543G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm	D*LxWxS543G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS543G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS543G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS543M30LF	30	500	without	metal bracket	D*LxWxS543M30LF	30	500	insert M3	metal bracket	D*OxWxS543M30LF	30	500	insert UNC 4.40	metal bracket	D*VxWxS543M30LF	30	500	female screw UNC 4.40	metal bracket
	PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																															
	D*xWxS543A30LF	30	500	without	without																																																																																																
	D*LxWxS543A30LF	30	500	insert M3	without																																																																																																
	D*OxWxS543A30LF	30	500	insert UNC 4.40	without																																																																																																
	D*VxWxS543A30LF	30	500	female screw UNC 4.40	without																																																																																																
	D*xWxS543H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*LxWxS543H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*OxWxS543H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*VxWxS543H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*xWxS543G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*LxWxS543G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*OxWxS543G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*VxWxS543G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*xWxS543M30LF	30	500	without	metal bracket																																																																																																
	D*LxWxS543M30LF	30	500	insert M3	metal bracket																																																																																																
D*OxWxS543M30LF	30	500	insert UNC 4.40	metal bracket																																																																																																	
D*VxWxS543M30LF	30	500	female screw UNC 4.40	metal bracket																																																																																																	
D	<table><tr><td>PART</td><td>NUMBER</td><td>AMPS</td><td>MATINGS/ UNMATINGS</td><td>FRONT ACCESSORY</td><td>PCB ACCESSORIES</td></tr><tr><td>D*xWxS543A40LF</td><td>40</td><td>500</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS543A40LF</td><td>40</td><td>500</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS543A40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS543A40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS543H40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS543H40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS543H40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS543H40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS543G40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*LxWxS543G40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS543G40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS543G40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS543M40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS543M40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS543M40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS543M40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>															PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS543A40LF	40	500	without	without	D*LxWxS543A40LF	40	500	insert M3	without	D*OxWxS543A40LF	40	500	insert UNC 4.40	without	D*VxWxS543A40LF	40	500	female screw UNC 4.40	without	D*xWxS543H40LF	40	500	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS543H40LF	40	500	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS543H40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS543H40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS543G40LF	40	500	without	metal bracket+harpoon PCB 1.60mm	D*LxWxS543G40LF	40	500	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS543G40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS543G40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS543M40LF	40	500	without	metal bracket	D*LxWxS543M40LF	40	500	insert M3	metal bracket	D*OxWxS543M40LF	40	500	insert UNC 4.40	metal bracket	D*VxWxS543M40LF	40	500	female screw UNC 4.40	metal bracket
	PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																															
	D*xWxS543A40LF	40	500	without	without																																																																																																
	D*LxWxS543A40LF	40	500	insert M3	without																																																																																																
	D*OxWxS543A40LF	40	500	insert UNC 4.40	without																																																																																																
	D*VxWxS543A40LF	40	500	female screw UNC 4.40	without																																																																																																
	D*xWxS543H40LF	40	500	without	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*LxWxS543H40LF	40	500	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*OxWxS543H40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*VxWxS543H40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*xWxS543G40LF	40	500	without	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*LxWxS543G40LF	40	500	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*OxWxS543G40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*VxWxS543G40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*xWxS543M40LF	40	500	without	metal bracket																																																																																																
	D*LxWxS543M40LF	40	500	insert M3	metal bracket																																																																																																
D*OxWxS543M40LF	40	500	insert UNC 4.40	metal bracket																																																																																																	
D*VxWxS543M40LF	40	500	female screw UNC 4.40	metal bracket																																																																																																	
E	<table><tr><td>PART</td><td>NUMBER</td><td>AMPS</td><td>MATINGS/ UNMATINGS</td><td>FRONT ACCESSORY</td><td>PCB ACCESSORIES</td></tr><tr><td>D*xWxS500A40LF</td><td>40</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A40LF</td><td>40</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*LxWxS500G40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>															PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A40LF	40	200	without	without	D*LxWxS500A40LF	40	200	insert M3	without	D*OxWxS500A40LF	40	200	insert UNC 4.40	without	D*VxWxS500A40LF	40	200	female screw UNC 4.40	without	D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm	D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M40LF	40	200	without	metal bracket	D*LxWxS500M40LF	40	200	insert M3	metal bracket	D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket	D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket
	PART	NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																															
	D*xWxS500A40LF	40	200	without	without																																																																																																
	D*LxWxS500A40LF	40	200	insert M3	without																																																																																																
	D*OxWxS500A40LF	40	200	insert UNC 4.40	without																																																																																																
	D*VxWxS500A40LF	40	200	female screw UNC 4.40	without																																																																																																
	D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																
	D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																
	D*xWxS500M40LF	40	200	without	metal bracket																																																																																																
	D*LxWxS500M40LF	40	200	insert M3	metal bracket																																																																																																
D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket																																																																																																	
D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket																																																																																																	
F	<table><tr><td colspan="2">www.fciconnect.com</td><td colspan="2">surface ISO 1302</td><td colspan="2">tolerance std ISO 406 ISO 1101</td><td colspan="2">projection mm</td><td colspan="2">mm</td></tr><tr><td colspan="2">TOLERANCES UNLESS OTHERWISE SPECIFIED</td><td colspan="2">ANGULAR</td><td colspan="2">LINEAR</td><td colspan="2">size</td><td colspan="2">Scale</td></tr><tr><td>Dr</td><td>M PESSON</td><td>2005-10-11</td><td colspan="2">0.X</td><td colspan="2">±0.3</td><td colspan="2">A2</td><td colspan="2">2:1</td></tr><tr><td>Eng</td><td>P LEGARE</td><td>2005-10-11</td><td colspan="2">0.XX</td><td colspan="2">±0.1</td><td colspan="2">ECN</td><td colspan="2">F10-0060</td></tr><tr><td>Chr</td><td></td><td></td><td colspan="2">0° ±2°</td><td colspan="2">0.XXX ±0.05</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td>Appr</td><td></td><td></td><td colspan="2">Product family</td><td colspan="2">- Spec ref</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">FCI</td><td colspan="2">SUB FEMALE DMW EUROPE</td><td colspan="2">avg no</td><td colspan="2">C01-8639-2300</td><td colspan="2">Rev.</td></tr><tr><td colspan="2">mixed power right angled solder</td><td colspan="2">catalog no</td><td colspan="2">- CUSTOMER</td><td colspan="2">sheet 3 of 7</td><td colspan="2">E</td></tr></table>															www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm		mm		TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR		LINEAR		size		Scale		Dr	M PESSON	2005-10-11	0.X		±0.3		A2		2:1		Eng	P LEGARE	2005-10-11	0.XX		±0.1		ECN		F10-0060		Chr			0° ±2°		0.XXX ±0.05						Appr			Product family		- Spec ref						FCI		SUB FEMALE DMW EUROPE		avg no		C01-8639-2300		Rev.		mixed power right angled solder		catalog no		- CUSTOMER		sheet 3 of 7		E			
	www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm		mm																																																																																												
	TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR		LINEAR		size		Scale																																																																																												
	Dr	M PESSON	2005-10-11	0.X		±0.3		A2		2:1																																																																																											
	Eng	P LEGARE	2005-10-11	0.XX		±0.1		ECN		F10-0060																																																																																											
	Chr			0° ±2°		0.XXX ±0.05																																																																																															
	Appr			Product family		- Spec ref																																																																																															
	FCI		SUB FEMALE DMW EUROPE		avg no		C01-8639-2300		Rev.																																																																																												
	mixed power right angled solder		catalog no		- CUSTOMER		sheet 3 of 7		E																																																																																												

5W1

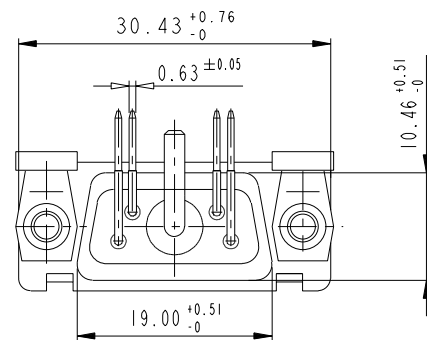
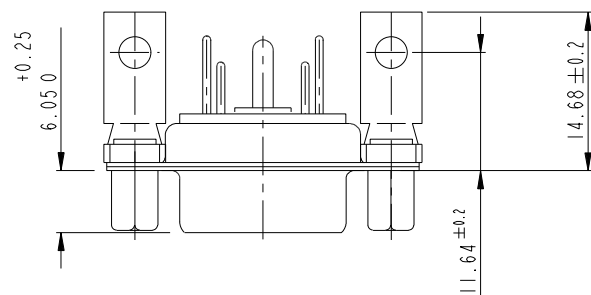
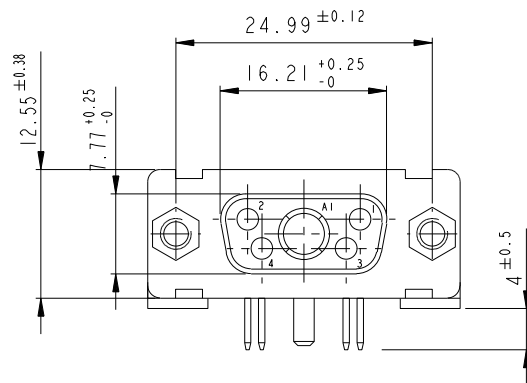
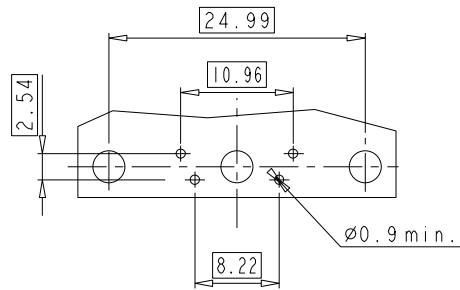
LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

Floating signal contacts


11W1

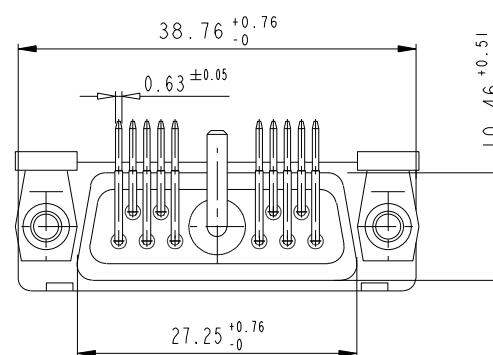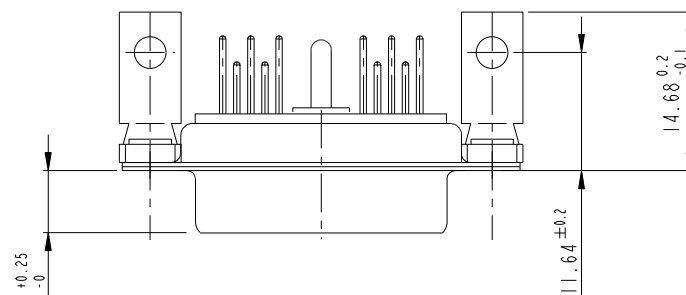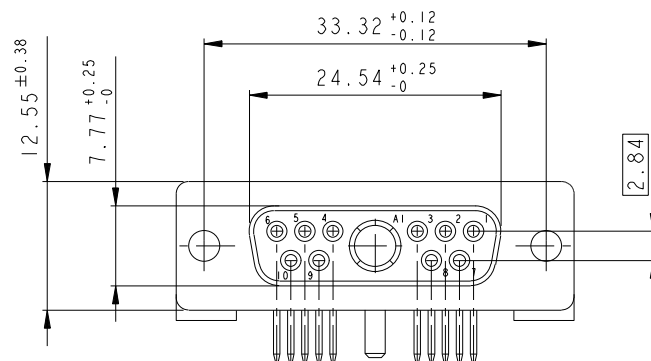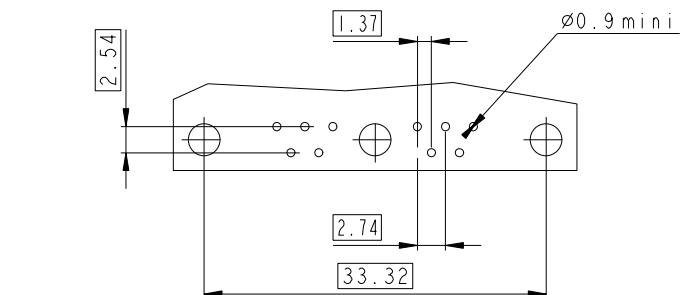LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I


7W2

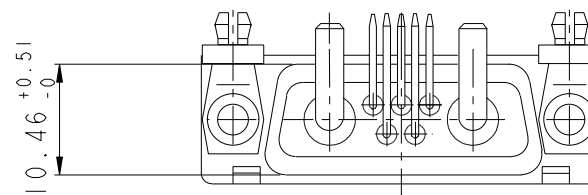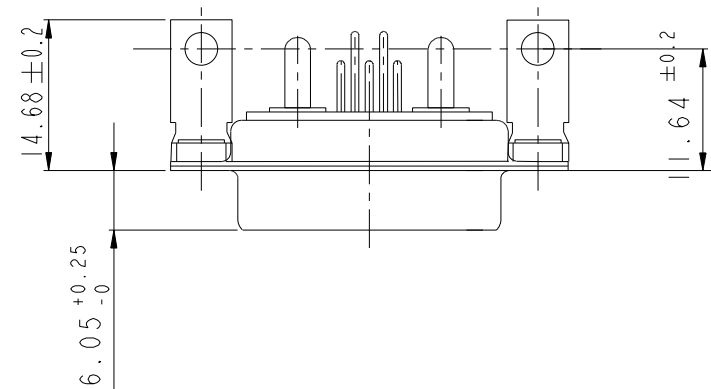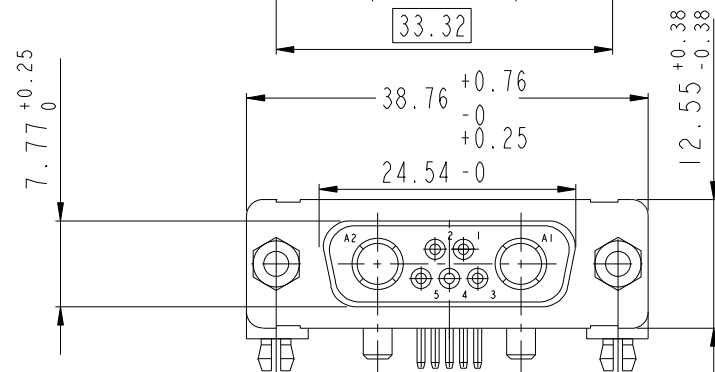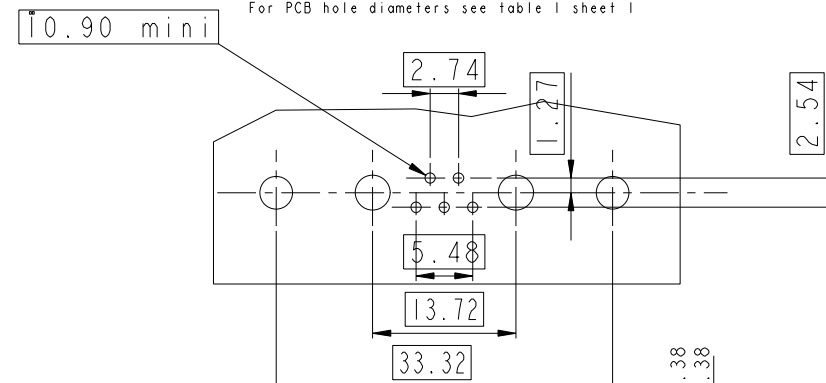LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet ISIDE VIEW FOR ALL LAYOUTS
(except size D)

VIEW WITHOUT POWERS CONTACTS

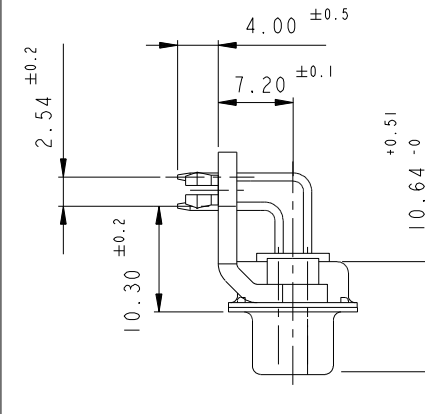

VIEW WITH POWERS CONTACTS




Copyright FCI.

www.fciconnect.com			surface	✓	tolerance std	projection	mm
			ISO 1302		ISO 406 ISO 1101		
			TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2005-10-11	ANGULAR		0.X	±0.3	size
Eng	P LEGARE	2005-10-11		LINEAR	0.XX	±0.1	A2
Chr			0° ±2°		0.XXX	±0.05	ECN
Appr				Product family			Spec ref
FCI			SUB FEMALE DMW EUROPE			dwg no	Rev.
			mixed power right angled solder			C01-8639-2300	E
			catalog no			CUSTOMER	sheet 4 of 7


13W3

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

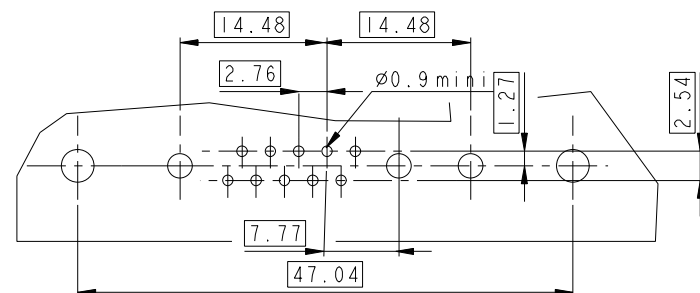


9W4

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

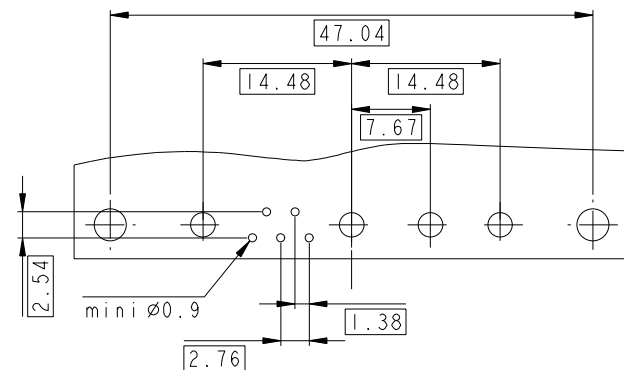

17W2

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

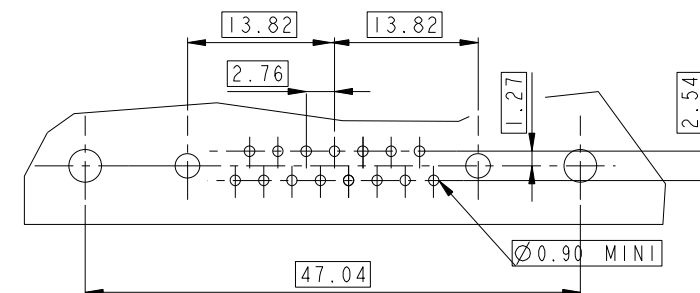

A

B

C

D

E

F

A










B

C

D

E

F

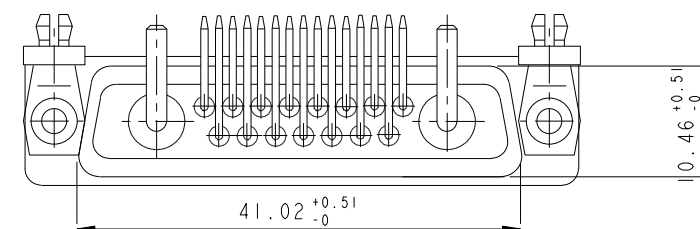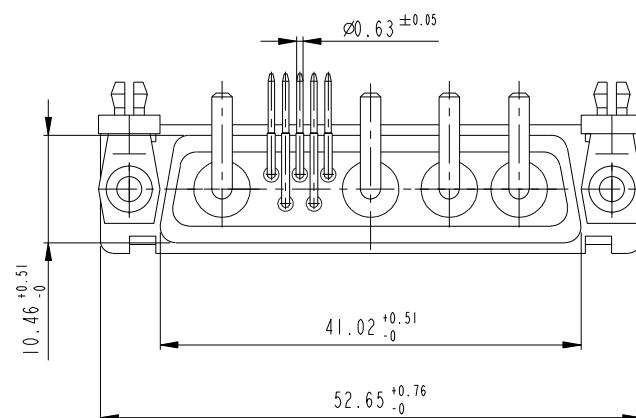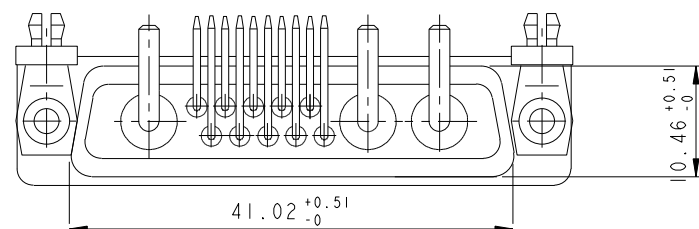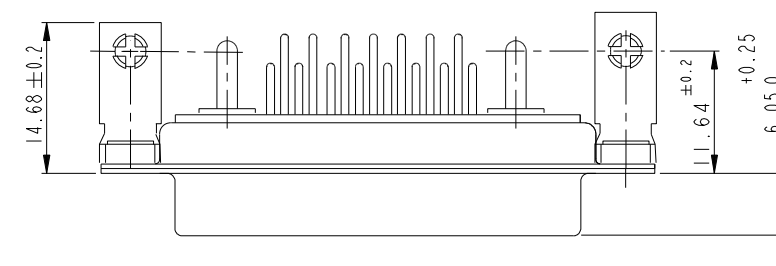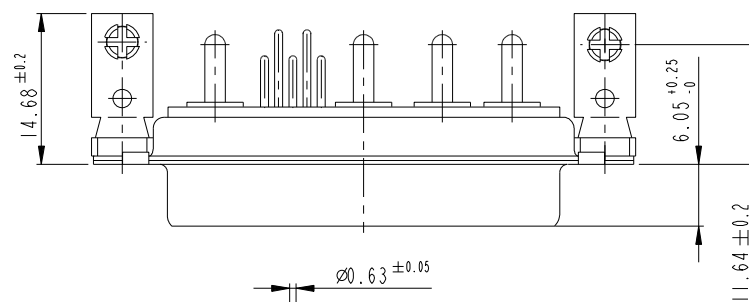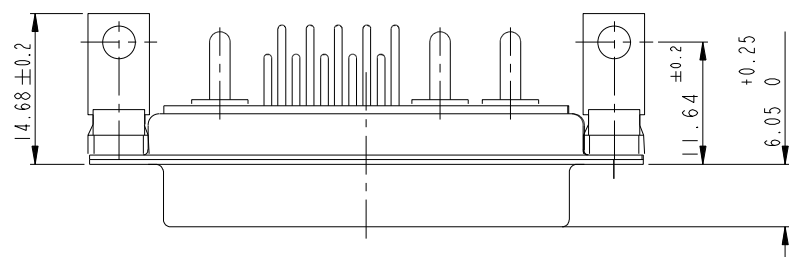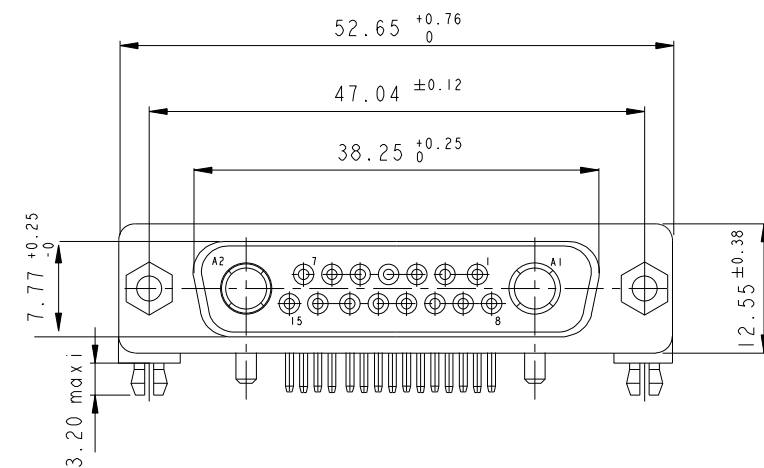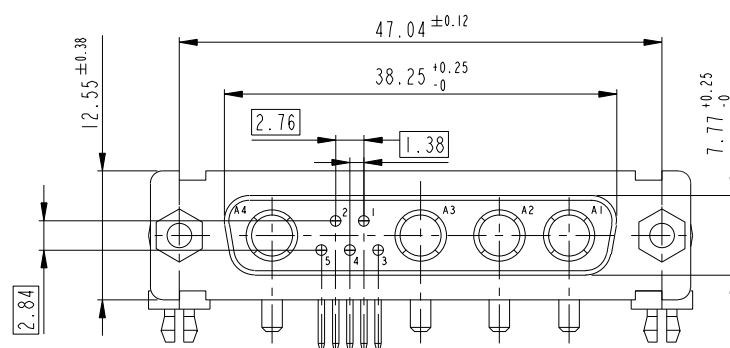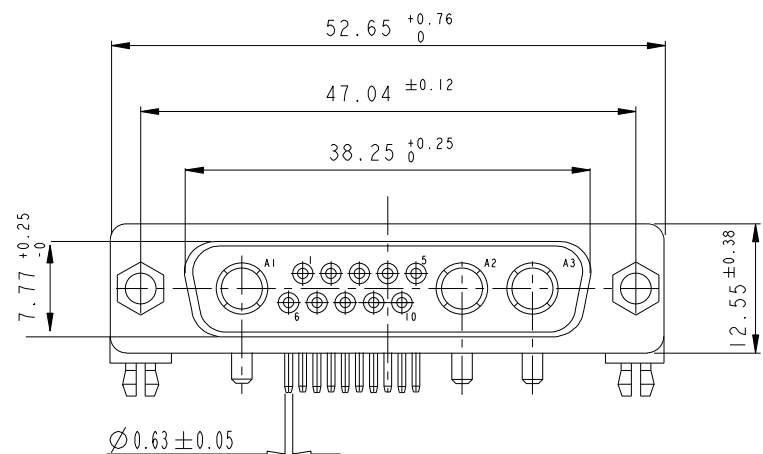

Floating signal contacts

www.fciconnect.com			surface - 		tolerance std		projection		mm		
			ISO 1302		ISO 406 ISO 1101						
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size	A2	Scale	2:1	
Eng	P LEGARE	2005-10-11			0.XX	±0.1					
Chr					0.XXX	±0.05					
Appr			Product family					ECN		F10-0060	
			-					Spec ref			
			title SUB FEMALE DMW EUROPE					dwg no C01-8639-2300		Rev E	
			catalog no					CUSTOMER			



Copyright FCI.

REV E - 2006-03-28

1

2

3

4

5


6

7

8


21W1

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

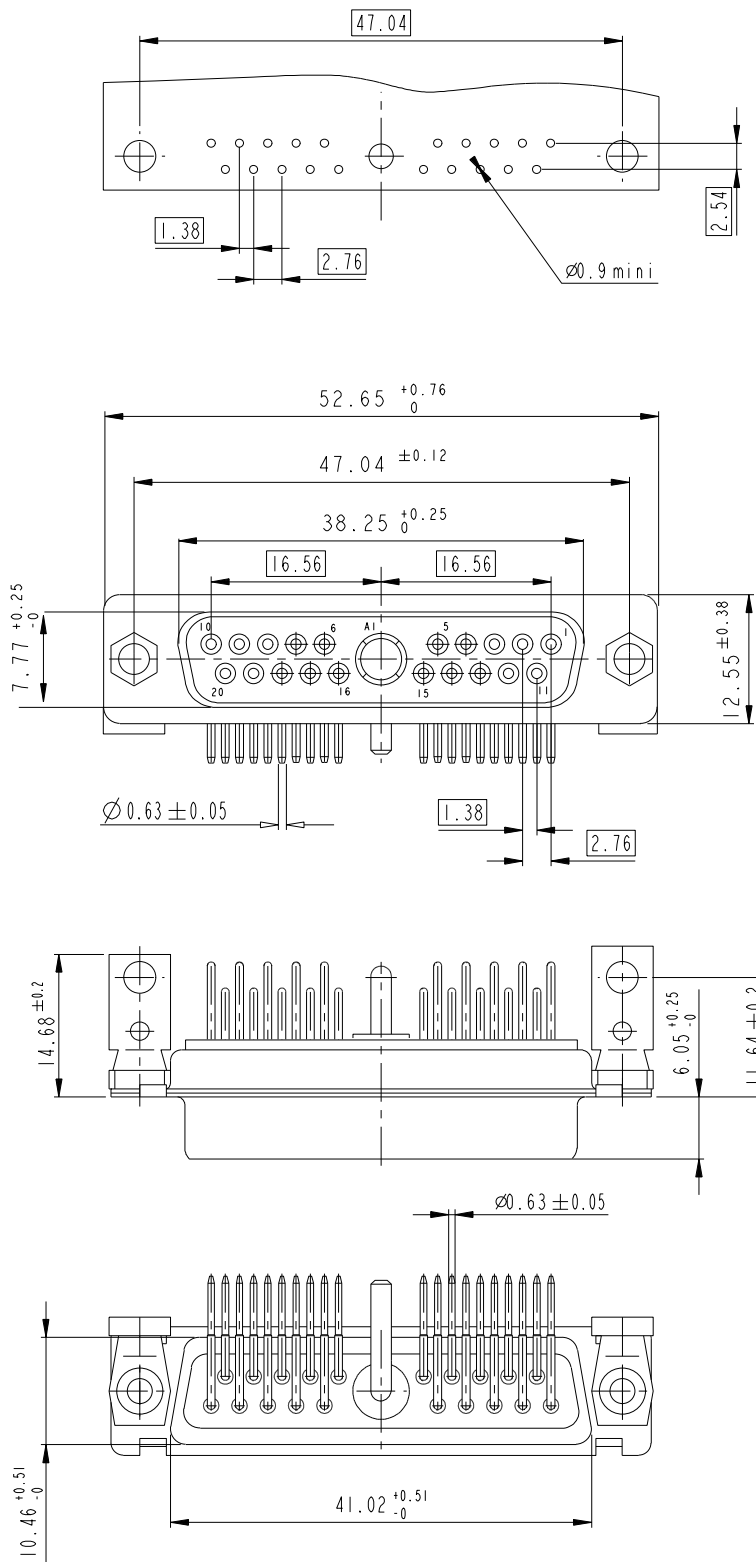

27W2

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

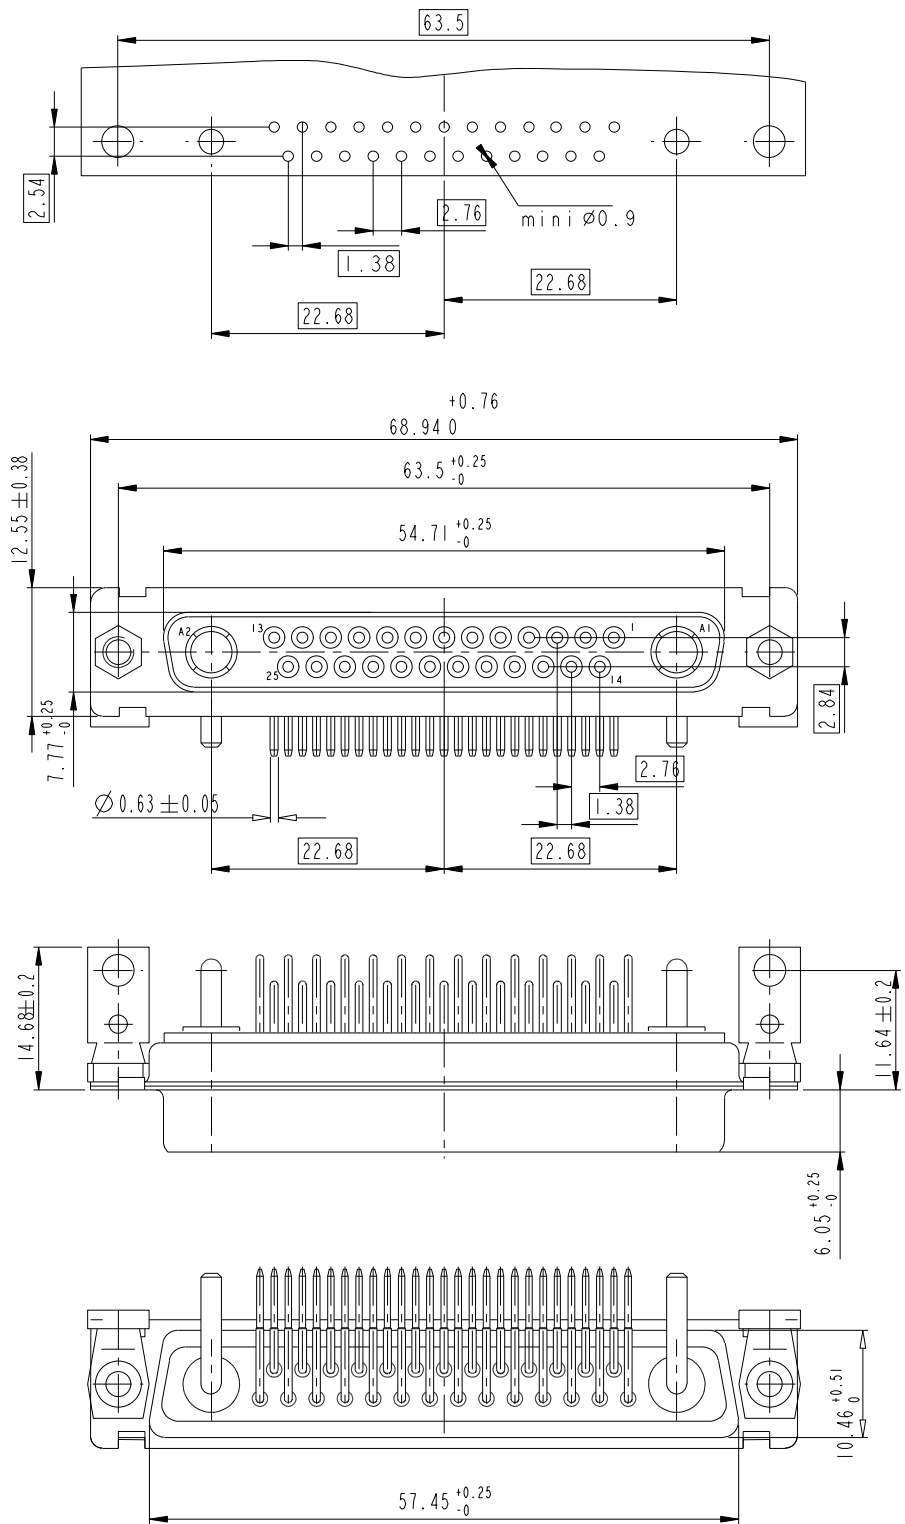

Copyright FCI.

REV E - 2006-03-28

2

3

4

5


6

8

www.fciconnect.com		surface	-	tolerance std	ISO 1302	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M PESSON	2005-10-11	ANGULAR	0.X	±0.3	size	A2	Scale	2:1
Eng	P LEGARE	2005-10-11	LINEAR	0.XX	±0.1	ECN	F10-0060	Rev.	E
Chr			0° ±2°	0.XXX	±0.05	Product family	-	Spec ref	
Appr									
FCI		SUB FEMALE DMW EUROPE			dwg no		C01-8639-2300		
		mixed power right angled solder			catalog no		CUSTOMER		
							sheet 6 of 7		


21W A4

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table 1 sheet 1

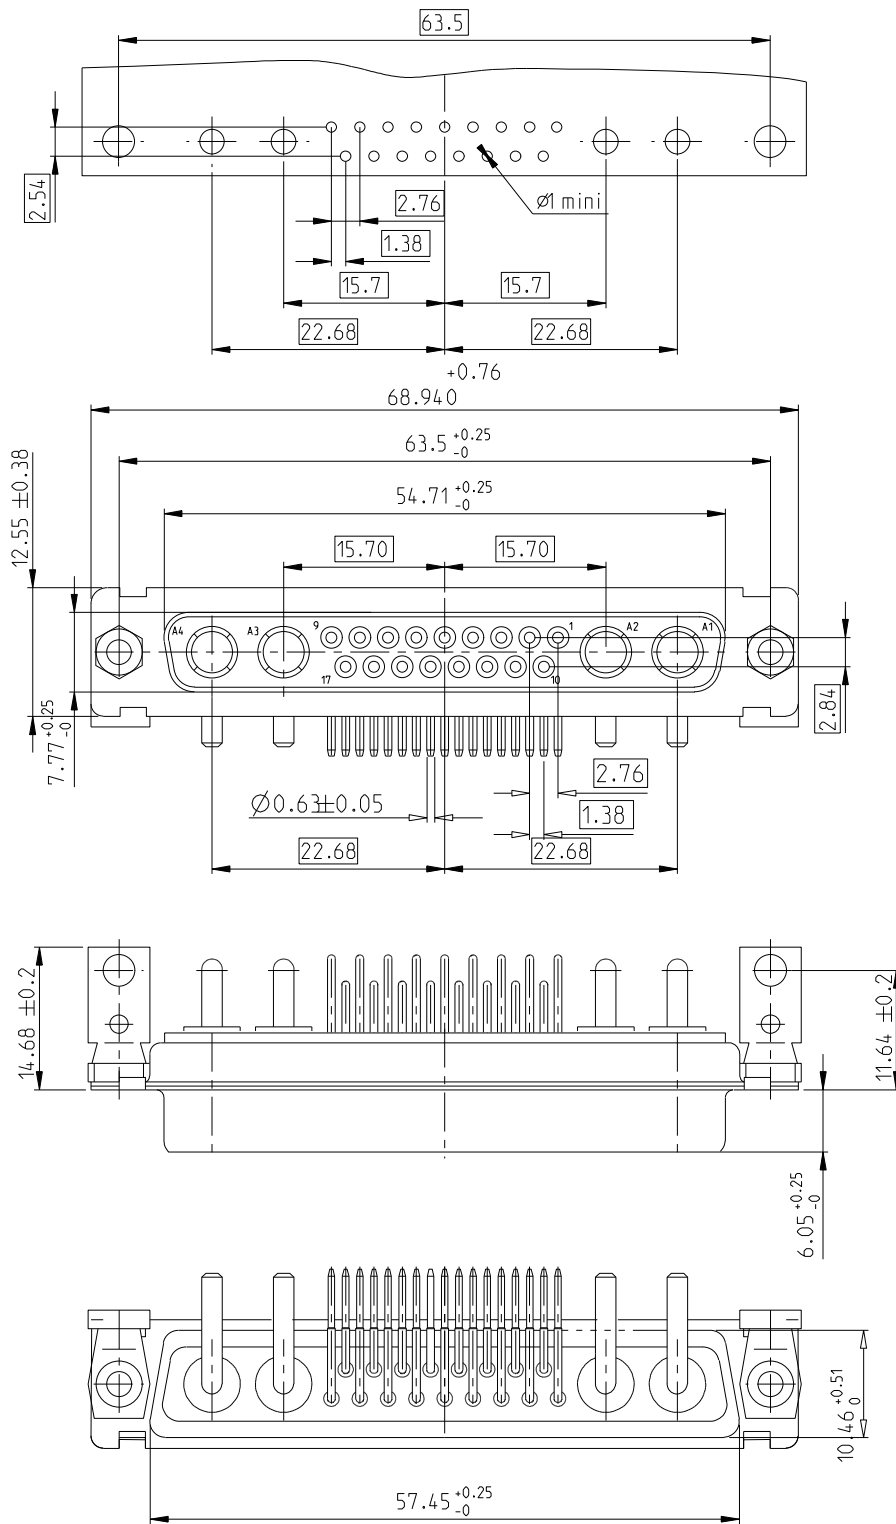


25W 3

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table 1 sheet 1

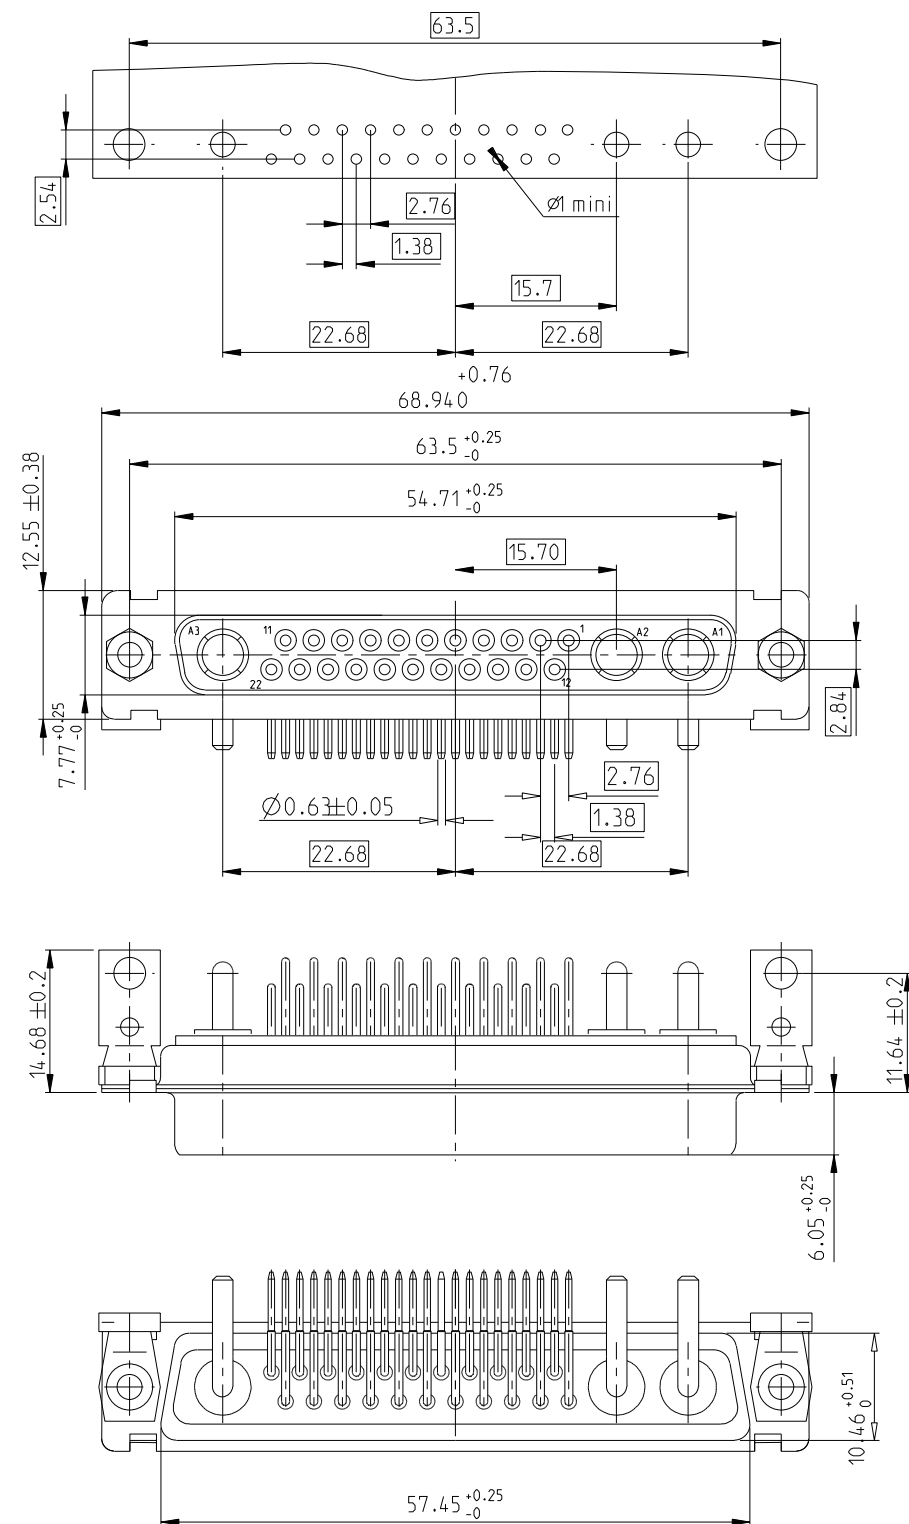

24W 7

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table 1 sheet 1

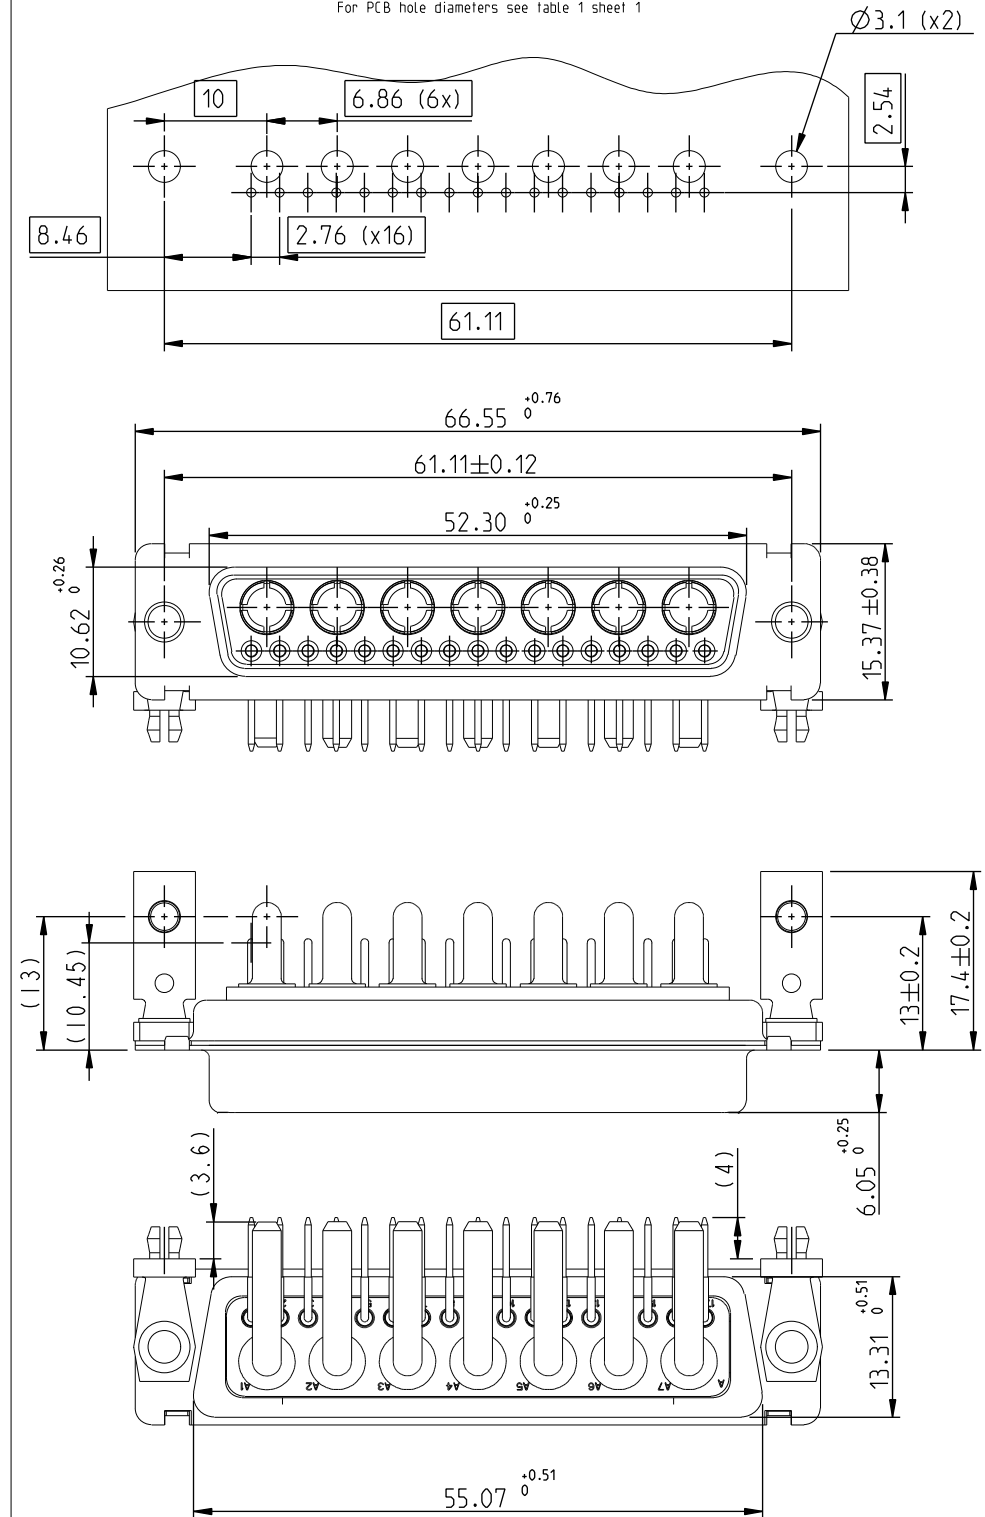

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406	projection ISO 1101	mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2005-10-11	ANGULAR	0.X	±0.3	size	Scale
Eng	P LEGARE	2005-10-11	LINEAR	0.XX	±0.1	A2	2:1
Chr			0° ±2°	0.XXX	±0.05	ECN	F10-0060
Appr			Product family	-	Spec ref		
FCI			title SUB FEMALE DMW EUROPE mixed power right angled solder			dwg no C01-8639-2300	Rev. E
			catalog no	-	CUSTOMER	sheet 7 of 7	