

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW8255511-A2

AQB7076

X98205-BZ

REPLACES PR-20950

CATALOG LISTING

BZ-2RW8255511-A2

PAGE 1 OF 1

M

ISSUE

7

REVISIONS

A	CO-77589	06 JAN 06
B	MAM 30 MAR 94	
C	OBS DWG CO78095	
D	CSL 10 AUG 94	
E	RE-INST CO80267	
F	SAD 10 MAR 95	
G	CO 92132	
H	GRT 23 FEB 98	
I	CO93346	
J	DLT 18 SEP 98	
K	F0017582	
L	TSG 06 JAN 06	

CHECK

06 JAN 06

RJ

CHECK

28 JAN 94

JAL


CHECK

26 JAN 94

KDR

DDM/CAD

DRAWN

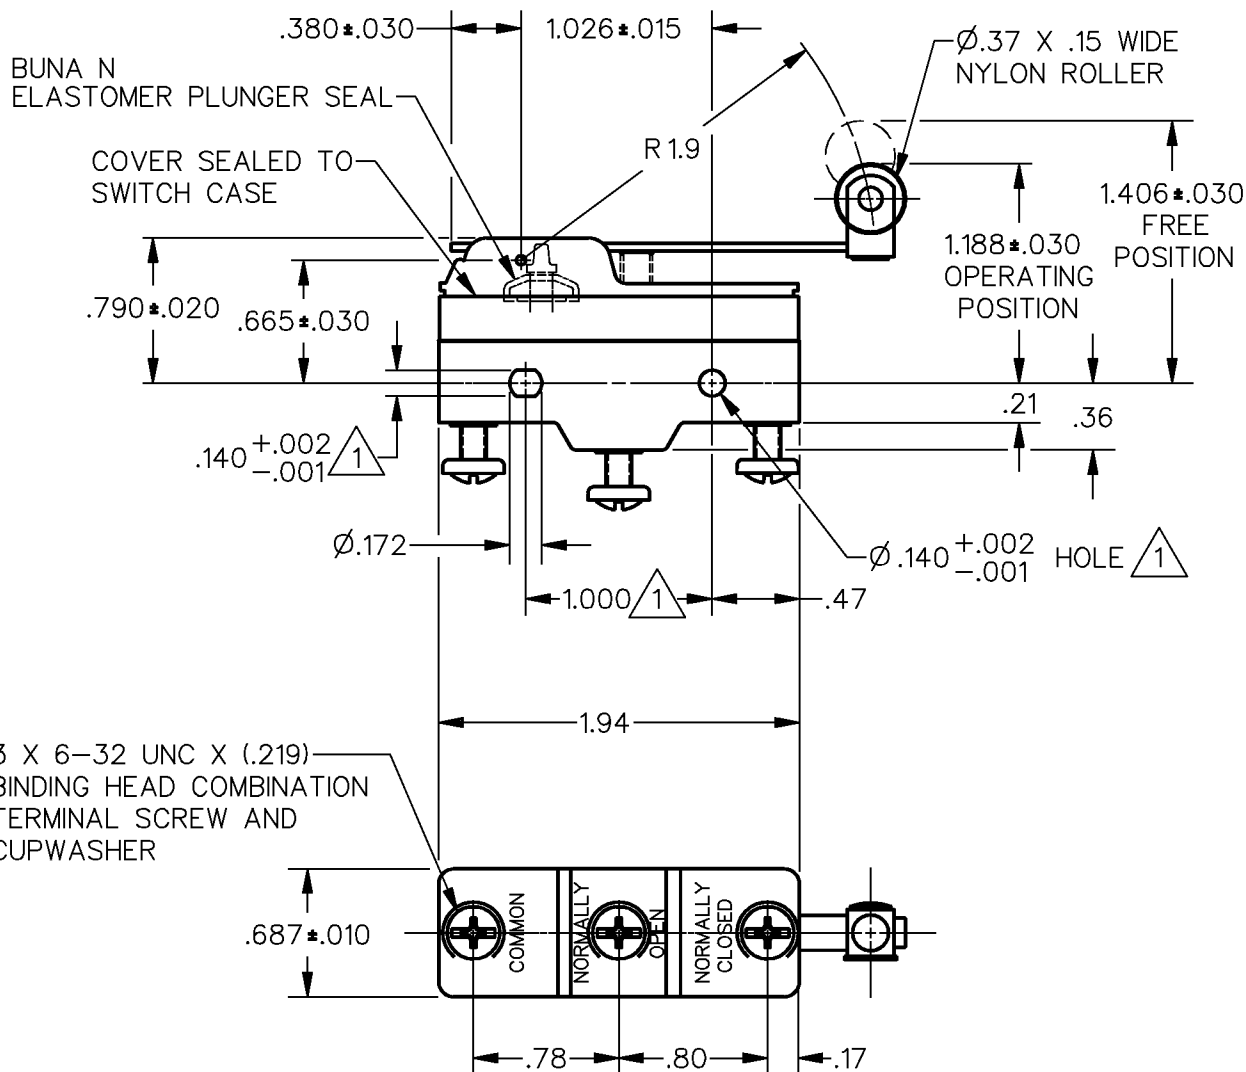


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø .139 MAX ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 7 OZ MAX
RELEASE FORCE — — — — 3/4 OZ MIN
DIFFERENTIAL TRAVEL — — .004—.040
OVERTRAVEL — — — — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96
15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
-L288-
-L315-
-L306-
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±
WEIGHT .076 LB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[BZ-2RW82555111-A2](#)