

350mW

Surface Mount Zener Diode




Features:

- Planar Die Construction
- 350mW Power Dissipation
- Zener Voltages from 2.4V to 51V
- Ideally Suited For Automated Assembly Processes

Applications:

350mW Surface mount zener diode

Tolerance: C = 5%

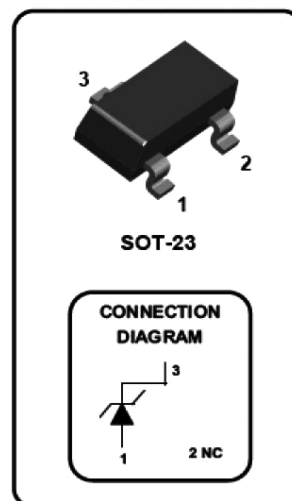

Max. Rating @ $T_A = 25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Limits	Unit
Forward voltage @ $I_F = 10\text{mA}$	V_F	0.9	V
Power dissipation	P_D	350	mW
Thermal resistance junction to ambient air	$R_{\theta JA}$	357	$^{\circ}\text{C/W}$
Operating and storage temperature range	T_j, T_{STG}	-65 to +150	$^{\circ}\text{C}$

Note : Valid provided that device terminals are kept at ambient temperature.
Tested with pulses, 300 μs pulse width, period = 5ms.
 $f = 1\text{kHz}$.

Electrical Characteristics @ $T_A = 25^{\circ}\text{C}$ unless otherwise specified





Marking Code	Zener Voltage Range				Max. Zener Impedance			Max. Reverse Current		Typical Temperature Coefficient@ IZTC mV/°C	
	Vz @ IZT			IZT	ZZT@IZT	ZZK@Izk	IR	VR			
	Nom(V)	Min(V)	Max(V)	mA	Ω		mA	μA	V	Min.	Max.
Z14	3.3	3.1	3.5	5	95	600	1	5	1	-3.5	0

350mW

Surface Mount Zener Diode



Typical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

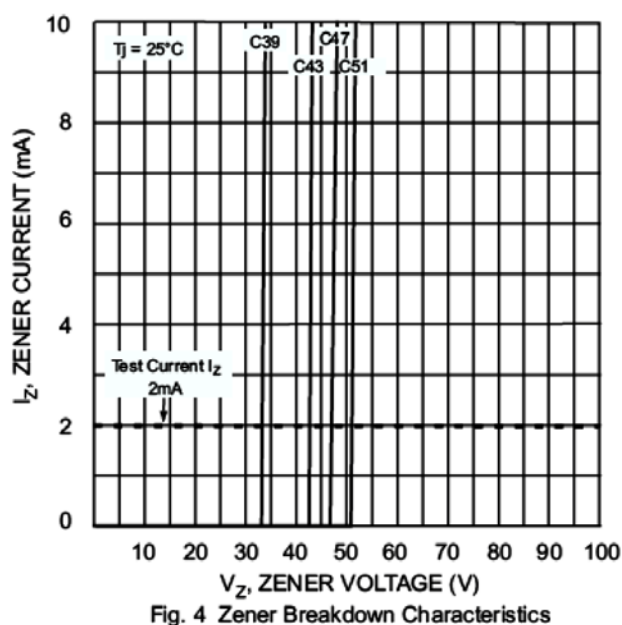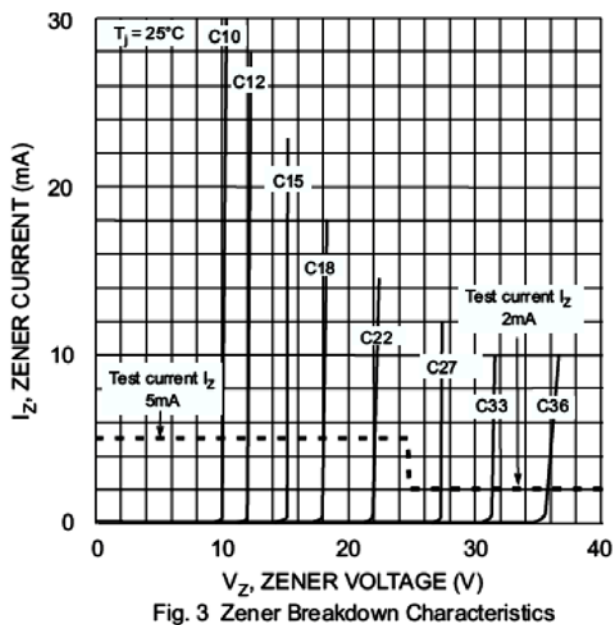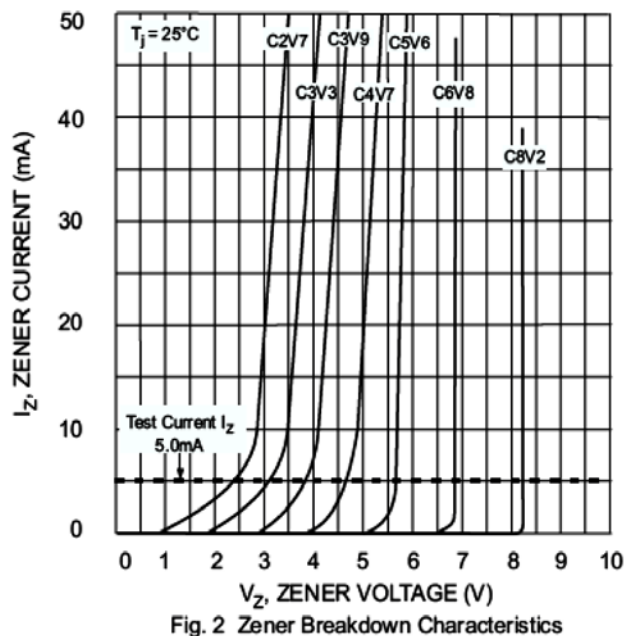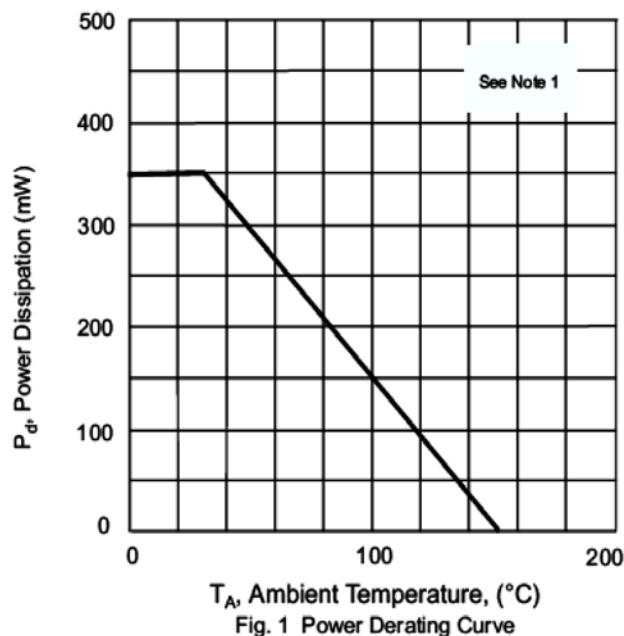


350mW

Surface Mount Zener Diode




Plastic surface mounted package

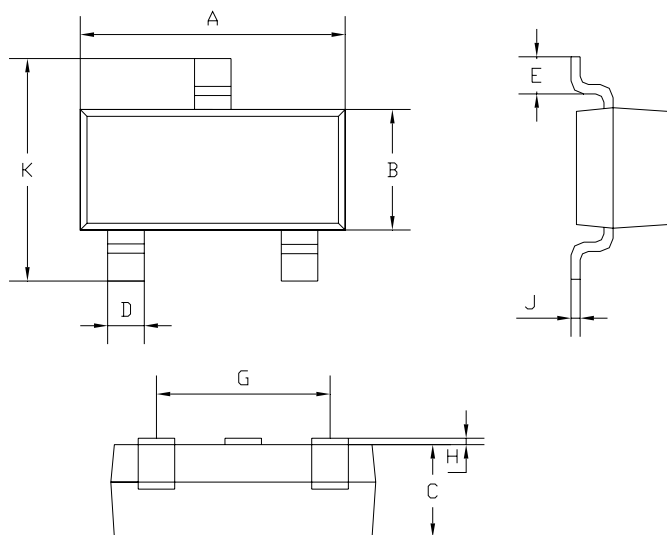

SOT-23		
Dim	Min	Max
A	2.85	2.95
B	1.25	1.35
C	1 Typical	
D	0.37	0.43
E	0.35	0.48
G	1.85	1.95
H	0.02	0.1
J	0.1 Typical	
K	2.35	2.45
All Dimensions in mm		

Soldering Footprint

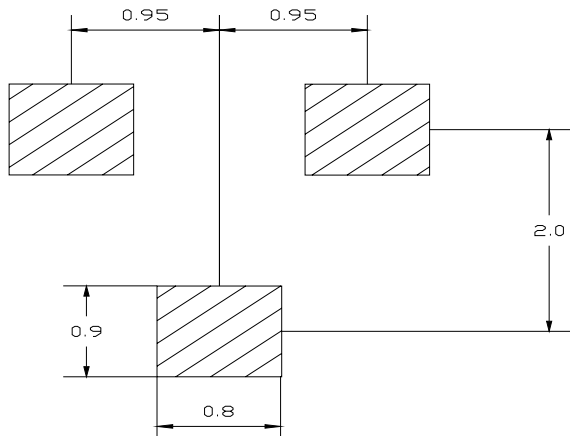

Unit : mm

Package Information

Device	Package	Shipping
BZX84C3V3-7-F	SOT-23	3,000 / Tape & Reel

Part Number Table

Description	Part Number
350mW Surface Mount Zener Diode	BZX84C3V3-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.