

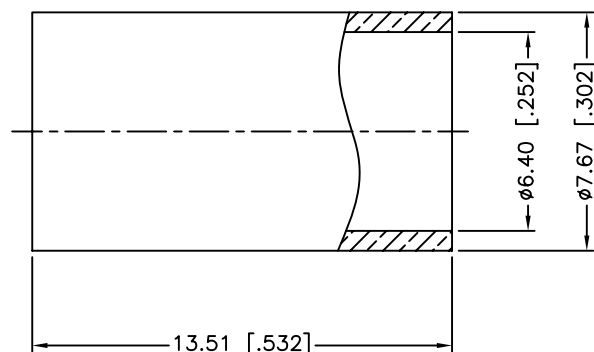


RECOMMENDED
CABLE STRIPPING DIM'S

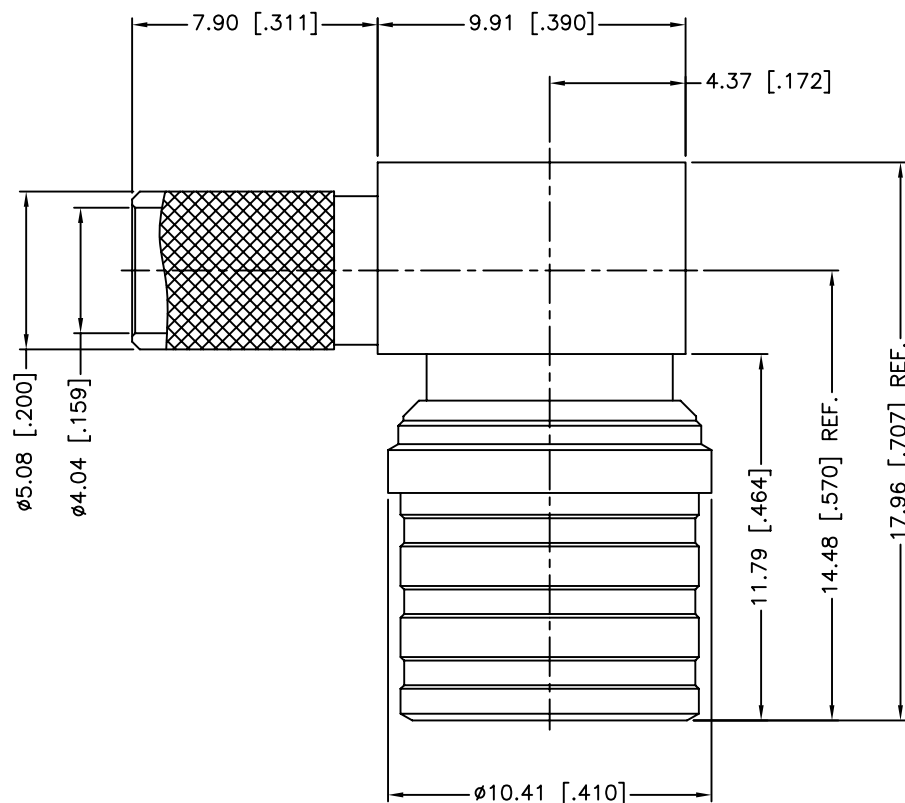

REV.	DATE	ECR NO.	DESCRIPTION
NC	06/07/11	XXXXXX	INITIAL RELEASE



1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER
3. IMPEDANCE:50 OHM
4. FREQUENCY RANGE: 0-6 GHz
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.

7	FERRULE	COPPER	NEXCOTE	1
6	CAP	BRASS	NEXCOTE	1
5	CONTACT PIN	BRASS	GOLD	1
4	SLEEVE	BRASS	NEXCOTE	1
3	OUT CONTACT	PHOSPHOR BRONZE	NEXCOTE	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/07/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/134105.DWG

Amphenol Connex			
PART DESCRIPTION QMA R/A CRIMP PLUG - 50 ohm (FOR LMR-240 CABLE)			
PART NO. 134105			
DWG. NO.	134105.DWG	REV.	NC
SIZE	A	SCALE	NA