

SERIES 1246 - DOUBLE-POLE PUSHBUTTON SWITCHES

TO 8 (8) A 250 V AC



PRODUCT FEATURES

- ◆ Powerful, double-pole pushbutton switch up to 14 A 125 V AC
- ◆ Alternatively with fastening strip and interference suppression capacitor
- ◆ Dust-protected

ON REQUEST

- ◆ Other connection variants

Mechanical life endurance	1E5	
Operating force	15 ±2 N	
Actuator	IP 40	
Material	actuator housing	PA glass fiber-reinforced Desmopan / PA glass fiber-reinforced
Interference suppressor	C = 0.22 µF 275 V AC (product-dependent)	
Approval marks	 /  / 	
Suitable for appliances of protection class II		



ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

POWER TOOL SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS


SERIES 1246 - DOUBLE-POLE PUSHBUTTON SWITCHES

TO 8 (8) A 250 V AC


double-pole	8 (8) A 250 V AC 5E4	6 (6) A 250 V AC 5E4	14 A 125 V AC	8 A 250 V AC	8 A 125 V DC	Connection type	Connection description	Contact distance in mm	Contact material	Miscellaneous	Stock version
Normally open contact (DPNO)											
1246.3101	●		●	●	●		2 x 4.8 x 0.8 2 x M3.5	≥ 3	Ag	with strip and interference suppression capacitor	
1246.3201	●		●	●	●		2 x 4.8 x 0.8 2 x 2.8 x 0.8 2 x M3.5	≥ 3	Ag	with strip without interference suppression capacitor	
Changeover switch (DPDT momentary)											
1246.6201		●					2 x 4.8 x 0.8 2 x 2.8 x 0.8 2 x M3.5	≥ 3	Ag	with strip without interference suppression capacitor without approval mark	




Basic type 1246

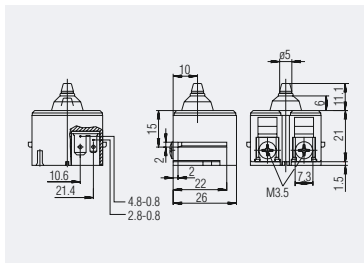

 Quick-connect terminal motor side, quick-connect terminal additional connection, screw connection mains side, 1246.3201

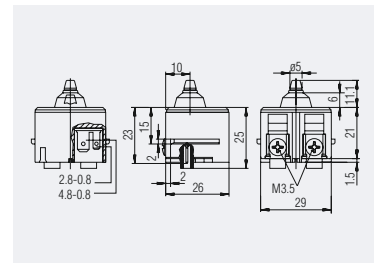

 Quick-connect terminal motor side, quick-connect terminal additional connection, screw connection mains side, 1246.6201

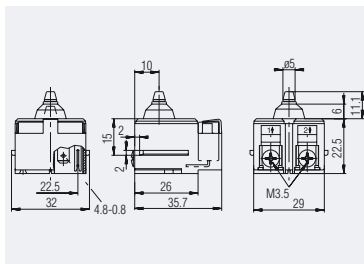

 Quick-connect terminal motor side, screw connection mains side with interference suppression capacitor 1246.3101