

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH – BASIC

REPLACES X98962-BZ

RELEASE NO. PR-21622

1
2
3
4
5

CHECK

CHECK	
-------	--

21 APR 95

JALA

CHECK

JALA	21 APR 95
------	-----------

BZ-7RW82135-A2



2

CATALOG LISTING

U
=
C
C
-


REVISIONS

A C093346

DLT
20 SEP 98

FORMTEK

DRAWN

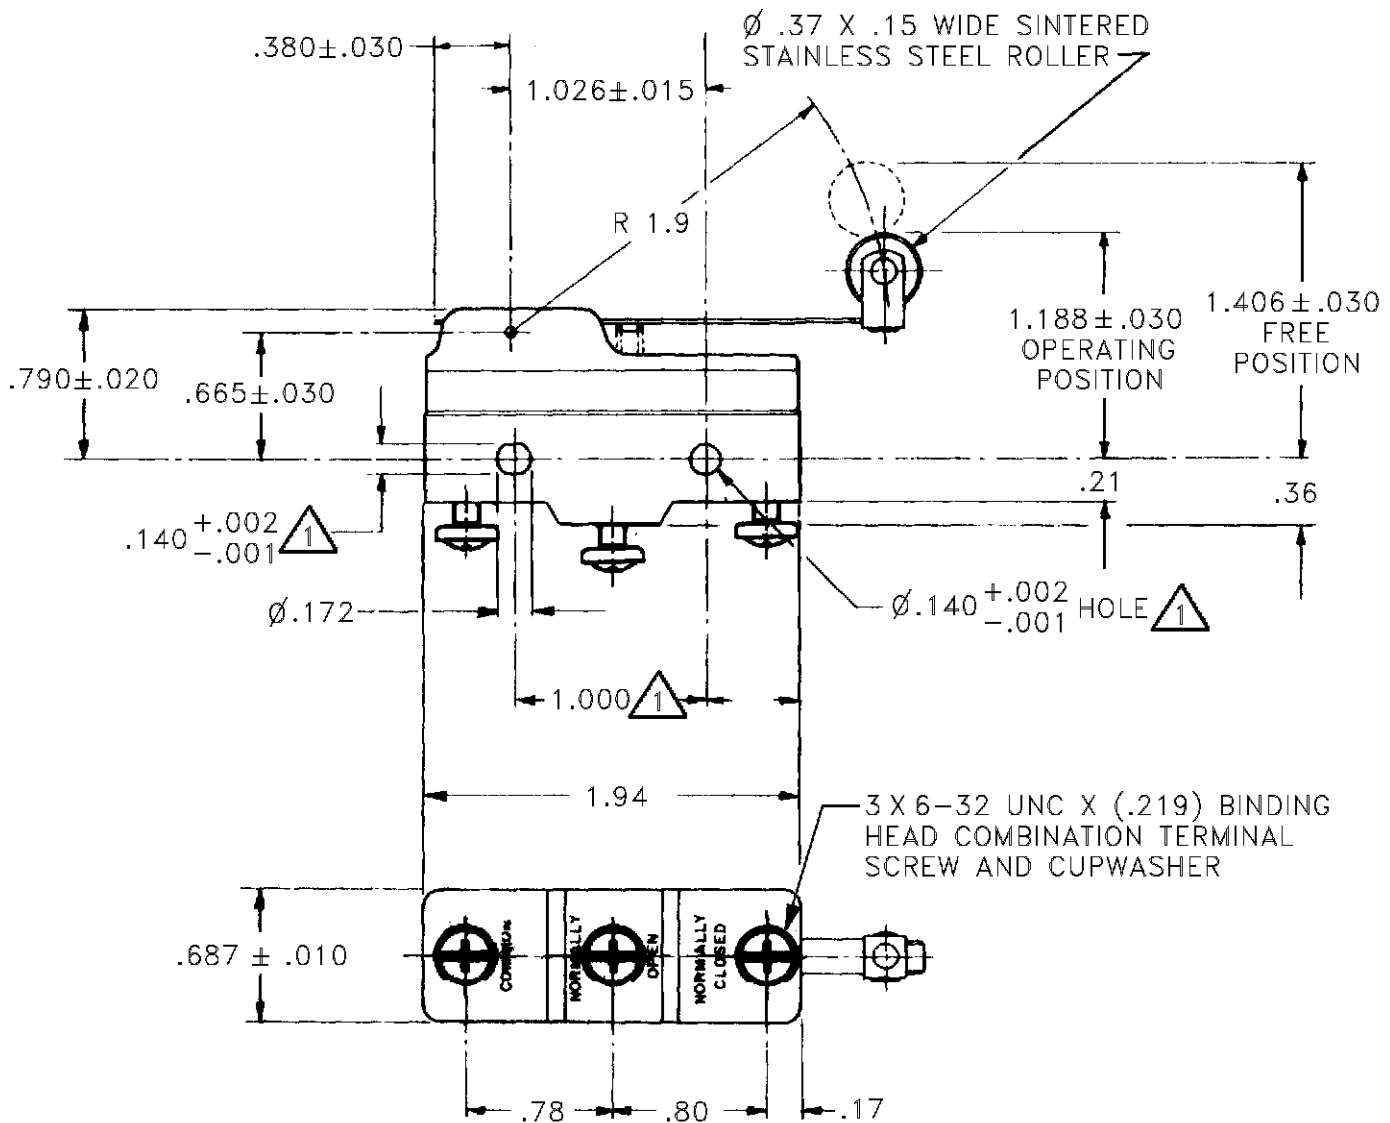


NOTE

1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OR .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	DO NOT SCALE PRINT
OPERATING FORCE — — 3 1/2 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 3/4 OZ MIN	L96	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL — — .074—.110	15A 125, <u>250</u> OR 480 VAC	TWO PLACE (.00)	±.015
OVERTRAVEL — — — — — .156 MIN	1/8HP 125 VAC, 1/4HP <u>250</u> VAC	THREE PLACE (.000)	±.005
	1/2A 125 VDC, 1/4A 250 VDC	ANGLES	±
	L288 L299 L306	WEIGHT	.076 LB
	CE ®   16A 250V ~ T85 5E4		