



## **Important notes about Classic Panel Mount Indicator Catalog Pages**

### **SCROLL DOWN TO VIEW CATALOG PAGE**

This catalog page is out-of-print and is used with the understanding that the information shown could be out-of-date. In many cases, part numbers shown on this page are discontinued. Most notably, many "Complete Assembly" parts, which consist of a cap and a base, can no longer be ordered by the 14-digit ordering code. To obtain these parts, please order the cap and base part numbers separately. This process provides the components contained with the original "Complete Assembly" part number.

All Dialight Classic Panel Mount Indicators need a leading 3-digit numerical series. In some cases, this catalog will show a 2-digit series. In this case, please add a leading zero. For example, 81-0211-300 becomes 081-0211-300.


Part numbers listed on Dialight catalog pages designate parts with Red lenses. For ordering lens colors other than red, consult the chart below. In most cases, the color is dictated by the 7<sup>th</sup> digit. For example, 095-0932-003 for a green cap.

Lens Colors	
1 - Red	5 - White
2 - Green	6 - Light Yellow
3 - Yellow	7 - Clear
4 - Blue	

[Click here for a cross reference guide to assembly part numbers.](#)

[Click here to view Frequently Asked Questions concerning Panel Mount Indicators.](#)

### **SCROLL DOWN TO VIEW CATALOG PAGE**



T-3 1/4  
MINIATURE  
BAYONET BASE

See lamp ratings  
on page K.

Recognized under the component  
program of Underwriters'  
Laboratories Inc.

75W., 125V.




# Miniature Incandescent Indicators

WITH LIGHT SHIELD LENS CAPS  
FOR MOUNTING IN 11/16" CLEARANCE HOLE  
FOR 2 TO 120V OPERATION

## MATERIAL AND FINISHES

- **Mounting Bushing and Light Shield Cap:** Standard—brass polished chrome finish. Optional—black nickel or satin chrome finish.
- **Mounting Nut:** Brass, white nickel finish.
- **Internal-tooth Lockwasher:** Phosphor bronze, white nickel finish.
- **Terminals:** Solder — brass, hot tinned with elongated slot. Screw—brass, white nickel finish.

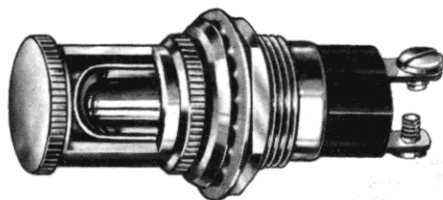

21-1310-2900-301

## PUSH-IN CAPS

21 SERIES  
22 SERIES  
89 SERIES  
90 SERIES

## BASE PART NUMBERS

solder terminal	screw terminal
21-0410-29-301	21-1310-29-301

CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS	
<p><b>PUSH-IN CAP with SNAP LOCK</b> 21-2900-300 one opening, 1/2"x1/2"</p>	21-0410-2900-301	21-1310-2900-301
<p><b>PUSH-IN CAP with SNAP LOCK</b> 22-2900-300 one opening, 3/32"x1/2"</p>	22-0410-2900-301	22-1310-2900-301
<p><b>PUSH-IN CAP with SNAP LOCK</b> 89-2900-300 one opening, 3/16"x9/16"</p>	89-0410-2900-301	89-1310-2900-301
<p><b>PUSH-IN CAP with SNAP LOCK</b> 90-2900-300 one opening, 3/16"x1/2"</p>	90-0410-2900-301	90-1310-2900-301

Part numbers shown in gray are normally  
in inventory at your Dialight Distributor.

Order complete with lamp to be assured of receiving the  
indicator light and correct lamp together for immediate use.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[021-5710-29-200](#) [021-0410-29-301](#) [021-2900-300](#) [021-5710-29-201](#) [021-2937-804](#) [021-0410-29-200](#) [021-0410-29-300](#) [021-1310-29-200](#) [021-1310-29-300](#) [021-5710-29-804](#) [021-5710-29-805](#) [021-5710-2937-804](#) [090-2900-300](#) [021-1310-29-301](#) [021-0410-29-201](#) [021-1310-29-201](#) [021-2900-200](#) [021-2937-912](#)