

## DIP



# C&K BPA Series Side Actuated DIP Switches



H


DIP

## Side Actuator – Surface Mount Terminals

| PART NUMBER | NO. POS. | DIM. 'A'      | QUANTITY PER TUBE |
|-------------|----------|---------------|-------------------|
| BPA02SK     | 2        | .280 (7,11)   | 60                |
| BPA04SK     | 4        | .480 (12,19)  | 35                |
| BPA05SK     | 5        | .578 (14,68)  | 30                |
| BPA06SK     | 6        | .680 (17,30)  | 25                |
| BPA07SK     | 7        | .778 (19,76)  | 20                |
| BPA08SK     | 8        | .878 (22,30)  | 20                |
| BPA09SK     | 9        | .978 (24,84)  | 15                |
| BPA10SK     | 10       | 1.078 (27,43) | 15                |

Schematic

SPST

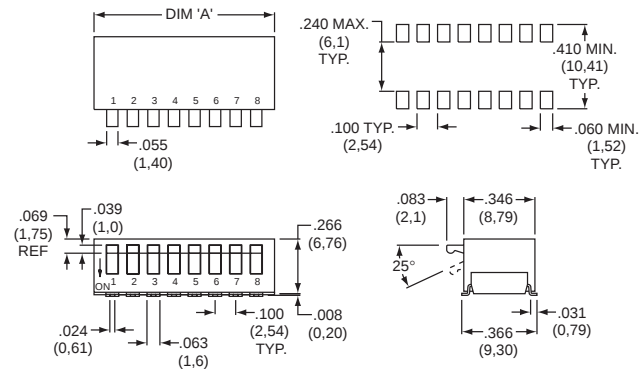


**NOTE:** Reverse throw available, add "R" to part number for "on" in "up" position. (example: BPA08RSK)


## Tape & Reel Packaging - Surface Mount Options Only 4, 8 & 9 Positions Only

| POLES | DIM. 'A'    | DIM. 'B'     | DIM. 'C'     | DIM. 'D'     | DIM. 'E'     |
|-------|-------------|--------------|--------------|--------------|--------------|
| 4     | .453 (11,5) | —            | .945 (24,0)  | .508 (12,9)  | .961 (24,4)  |
| 8     | .795 (20,2) | 1.590 (40,4) | 1.732 (44,0) | .894 (22,7)  | 1.748 (44,4) |
| 9     | .795 (20,2) | 1.590 (40,4) | 1.732 (44,0) | 1.004 (25,5) | 1.748 (44,4) |


Note: For tape and reel packaging, add 'R' to end of part number.

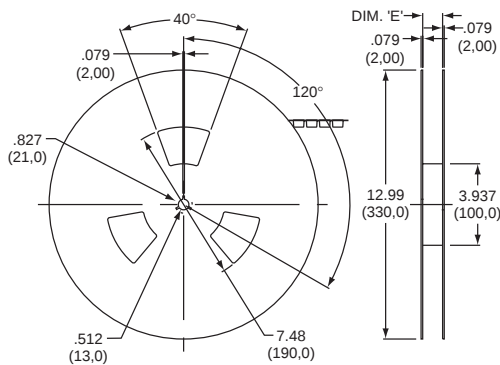


### 4 Position

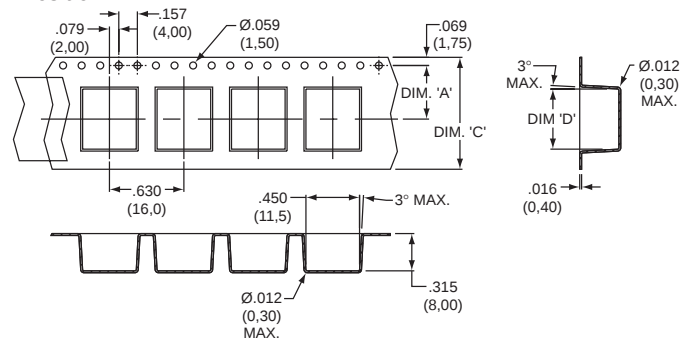

### 8 & 9 Position

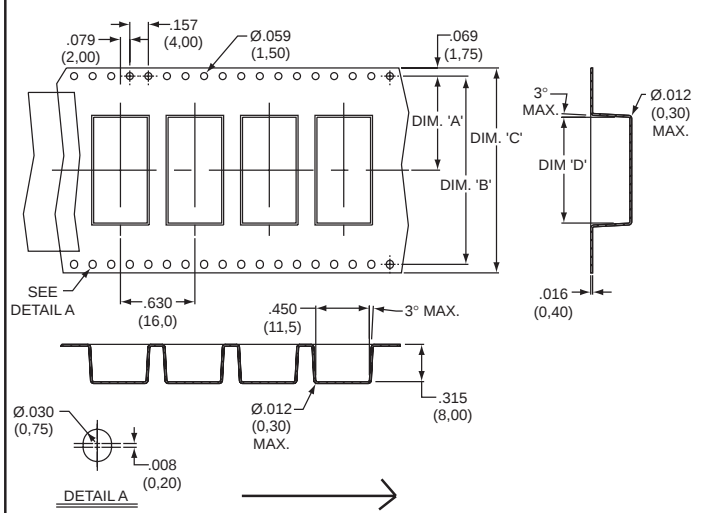

Direction of feed



Third Angle Projection

Dimensions are shown inch (mm)  
Dimensions subject to change