


RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module

ARJ12A

RoHS
Compliant



31.28 x 13.60 x 21.50 mm

FEATURES:

- Tab down
- Available with or without LED
- Suitable CAT 5 & 6 cable and UTP
- Comply IEEE 802.3ab
- LAN Magnetic with RJ4
- Suitable for RoHS compliant reflow

APPLICATIONS:

- 10, 100 and 1000 Base-T LAN
- NIC, LoM and PC

STANDARD SPECIFICATIONS at 25°C

Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C

Part Number	Turns Ratio $\pm 5\%$		Tab	EMI Fingers	LEDs	Insertion Loss (dB typ) 0.3- 100 MHz	Return Loss (dB typ @100 Ω $\pm 15\%$)		
	TX	RX					1- 10 MHz	30 MHz	60-80 MHz
ARJ12A-MASD-A-B-EMU2	1CT:1CT	1CT:1CT	DOWN	Yes	G/Y	-1.2	-18	-16	-12
ARJ12A-MASD-A-B-FMU2	1CT:1CT	1CT:1CT	DOWN	Yes	G/Y	-1.2	-18	-16	-12
ARJ12A-MCSD-MU2	1CT:1CT	1CT:1CT	DOWN	Yes	-	-1.2	-18	-16	-12

Part Number	Crosstalk (dB TYP)			Common Mode Rejection (dB TYP)		Hipot (Vrms)
	1 - 10 MHz	30 - 60 MHz	60 - 100 MHz	1 - 50 MHz	50 - 130 MHz	
ARJ12A-MASD-A-B-EMU2	-40	-35	-30	-30	-20	1500
ARJ12A-MASD-A-B-FMU2	-40	-35	-30	-30	-20	1500
ARJ12A-MCSD-MU2	-40	-35	-30	-30	-20	1500

Contact Abracon for more custom configurations. See options to build a custom configuration.

OPTIONS AND PART IDENTIFICATION

ARJ12A - - - -

Mechanical	Schematic	Left LED color (e.g. B for Yellow, AB for Green-Yellow)	Right LED color (e.g. B for Yellow, AB for Green-Yellow)	LED polarity	Turns Ratio (Tx)	Turns Ratio (Rx)	Gold plating
MA ~ MD (Please see mechanical section)	SA ~ SZ (Please see schematic section)	Blank: No LED	Blank: No LED	Blank: No LED	K: 1CT:1.41	S: 1CT:1.41	1: 3u "
		A: Green	A: Green	E ~ H (Please see 7.0 LED polarity section)	L: 1CT:1	T: 1CT:1	2: 6u "
		B: Yellow	B: Yellow		M: 1CT:1CT	U: 1CT:1CT	3: 15u "
		C: Amber	C: Amber		N: 1.414:1CT	V: 1.414:1CT	4: 30u "
		D: Orange	D: Orange		O: 1CT:1.41CT	W: 1CT:1.41CT	5: 50u "
					P: 1:2CT	X: 1:2CT	
					Q: 1:1.414CT	Y: 1:1.414CT	
					R: 1CT:2.5	Z: 1CT:2.5	



31.28 x 13.60 x 21.50 mm

**RoHS
Compliant**

MECHANICAL DIMENSIONS

[illegible]

ABRACON IS
ISO 9001:2008
CERTIFIED




Visit www.abracon.com for Terms & Conditions of Sale **Revised: 06.09.14**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 06.09.14

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module










ARJ12A

RoHS
Compliant



31.28 x 13.60 x 21.50 mm


SCHEMATICS

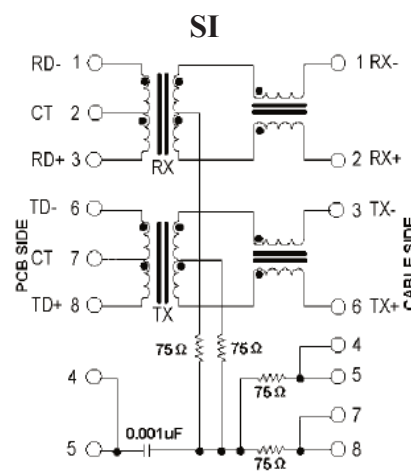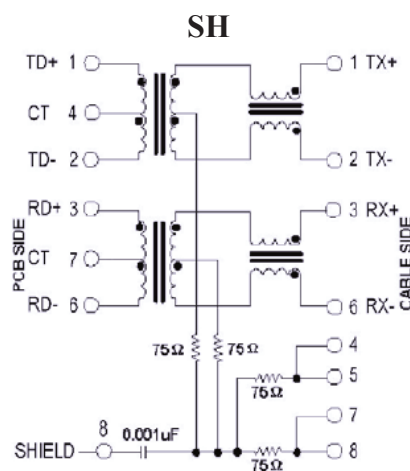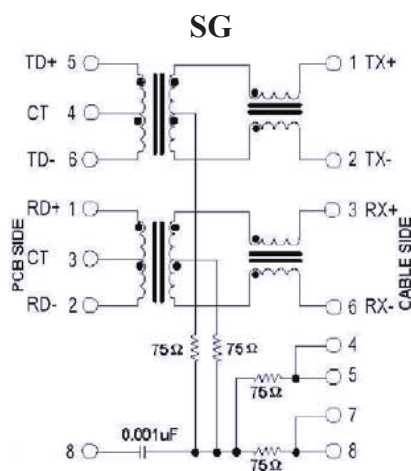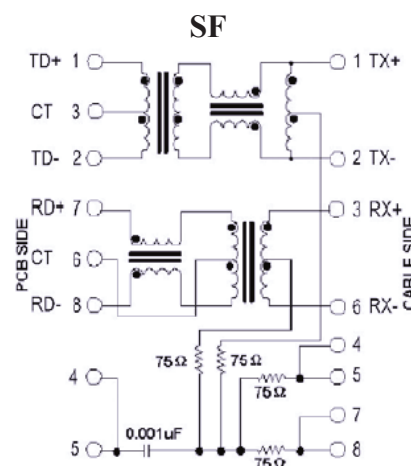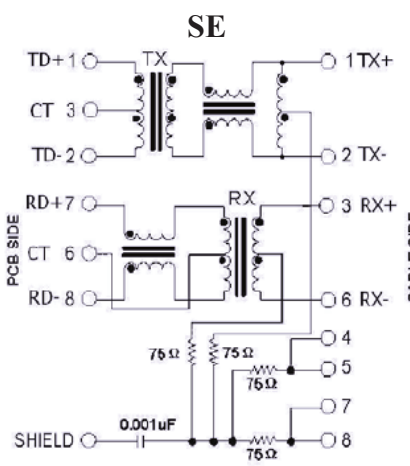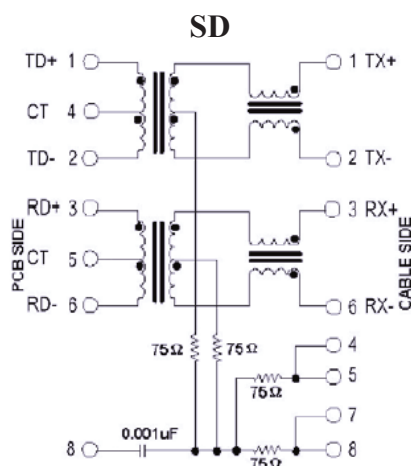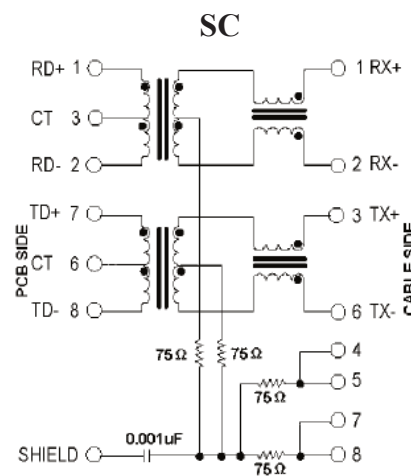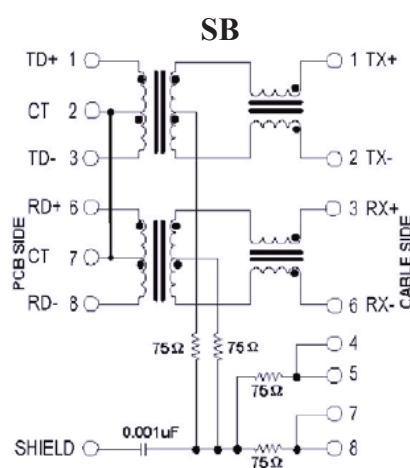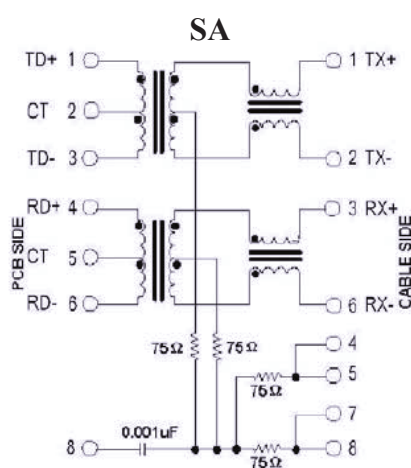

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module










ARJ12A

RoHS
Compliant



31.28 x 13.60 x 21.50 mm


SCHEMATICS - continued

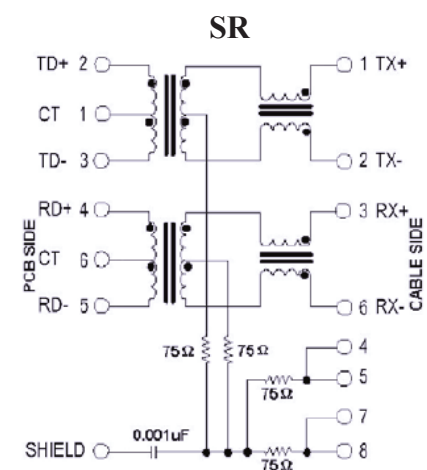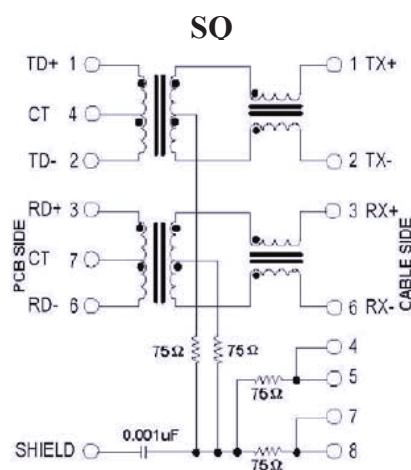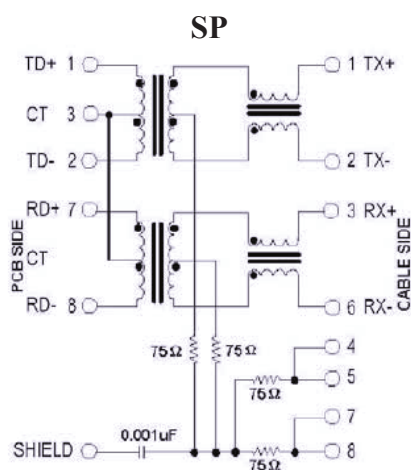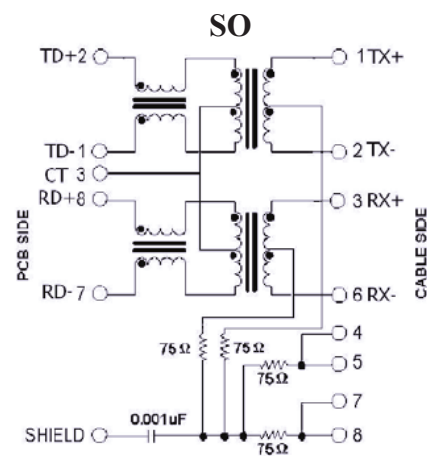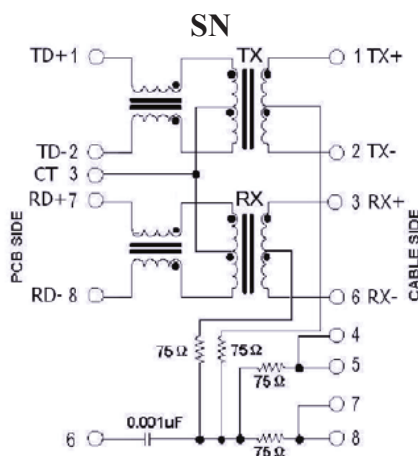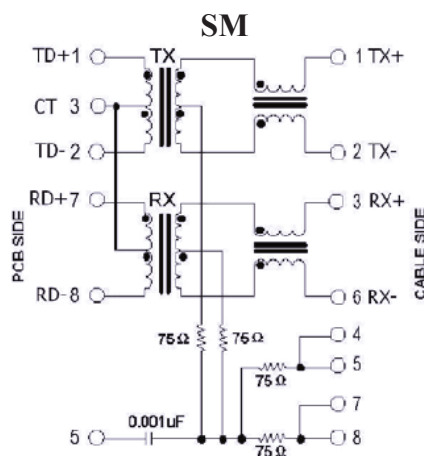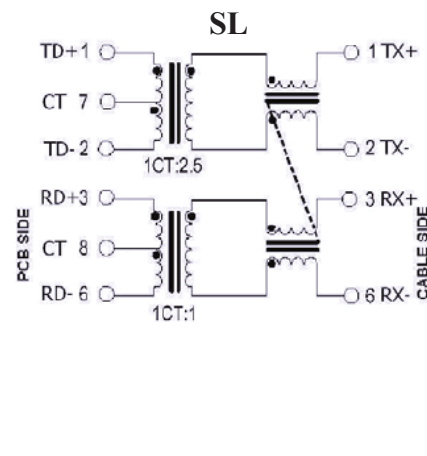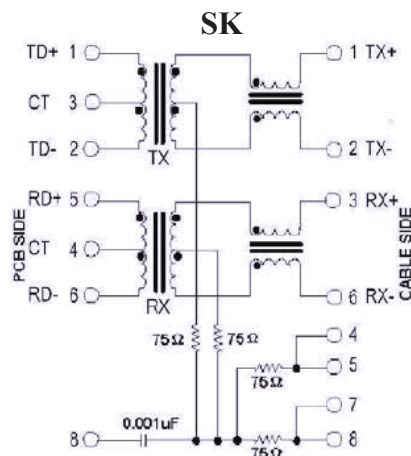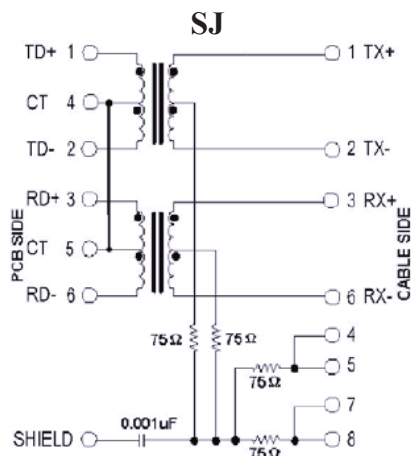

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module









ARJ12A

RoHS
Compliant



31.28 x 13.60 x 21.50 mm


SCHEMATICS

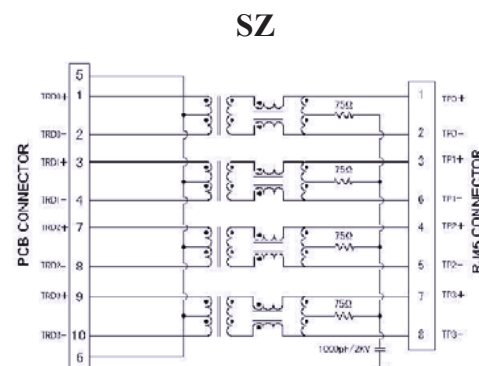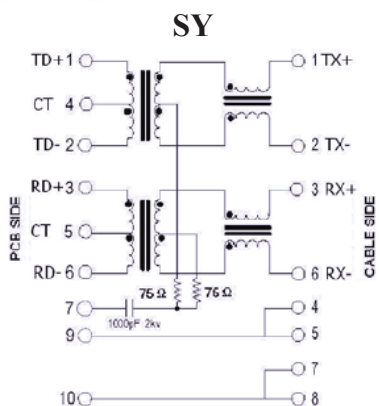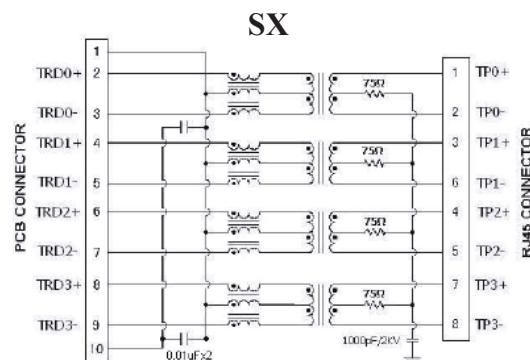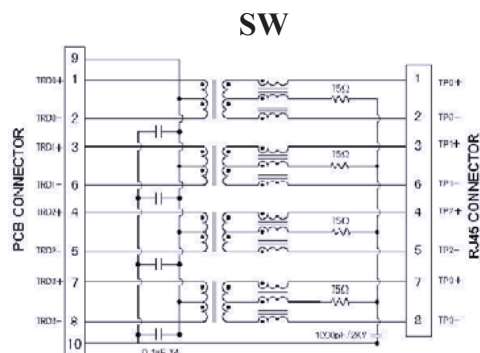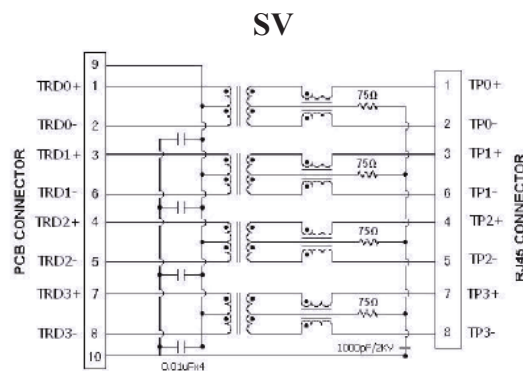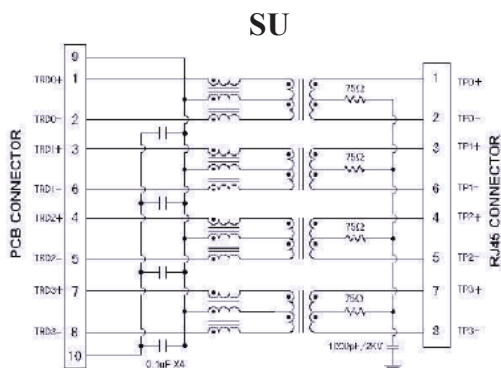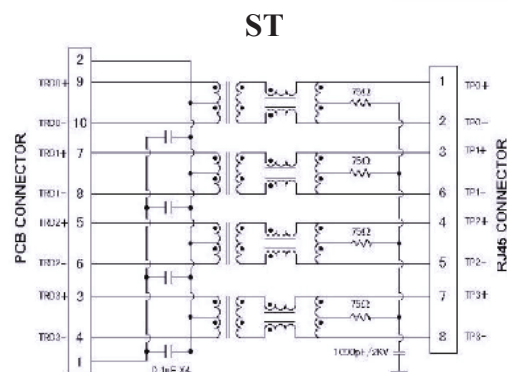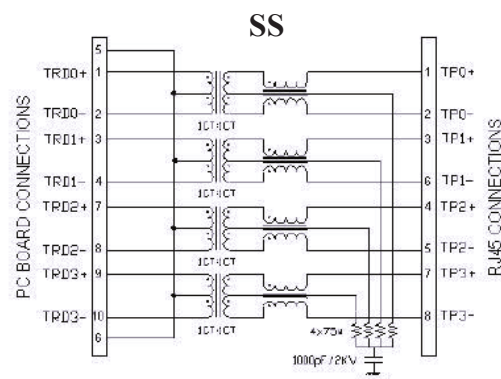

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module



ARJ12A

RoHS
Compliant





LED POLARITY

8PIN:

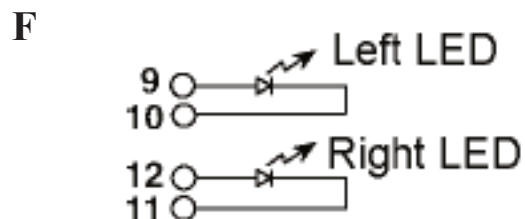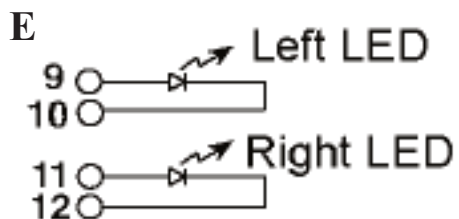


10PIN:

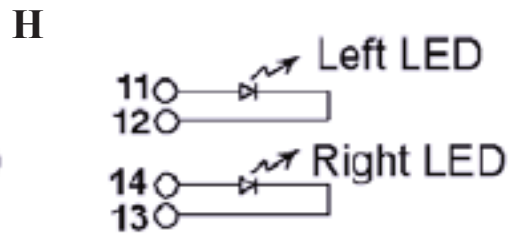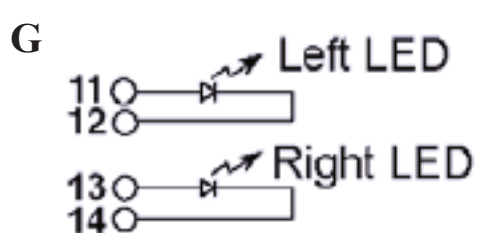

RJ45 10/100/1000 Base-TX Tab down 1x2 Jack with Magnetic Module

ARJ12A



RoHS
Compliant




PACKING: 30pcs/tray

Packaging material: PET

Outer carton unit : 600 pcs/ 20 Trays/box

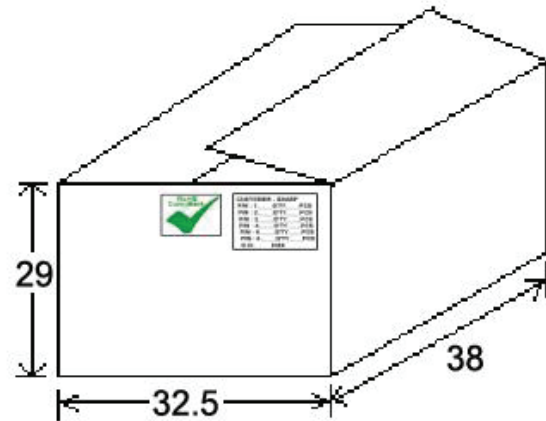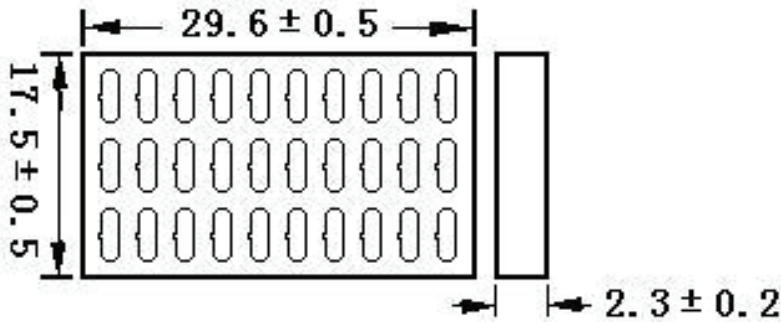

REFLOW PROFILE:

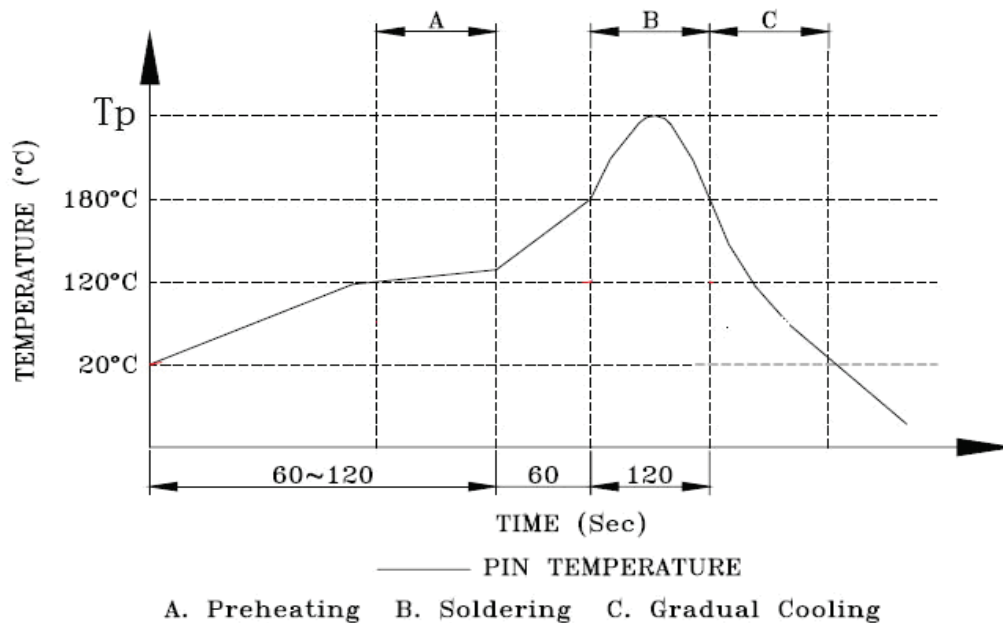

Peak temperature(Tp) : 250± 10°C

Peak temperature(Tp) time : 5sec max

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 06.09.14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[ARJ12A-MASD-A-B-EMU2](#) [ARJ12A-MASD-A-B-FMU2](#) [ARJ12A-MCSD-MU2](#)