




DUAL-IN-LINE SOCKETS

SERIES 121, 122, 123, 124 • 1 - 4 LEVEL WRAPOST • OPEN FRAME

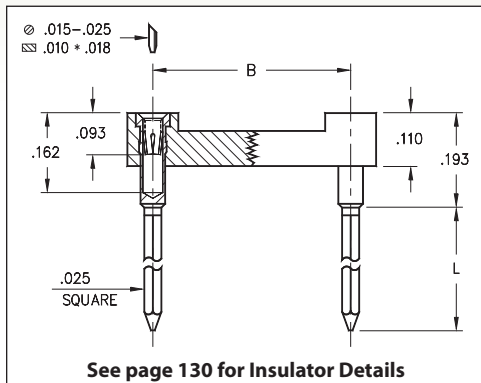

- Solderless wrappost terminals are firmly locked in the insulator body to withstand torque of a wrapping tool
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 121, 122, 123 and 124 use MM #0040, #0086, #0088 and #0089 pins. See page 198 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

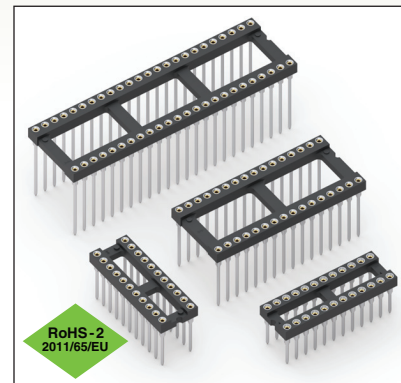

Total number of pins				Quantity per tube	ORDERING INFORMATION							
	A	B	C		L = .260 (1 Level Wrapost)		L = .370 (2 Level Wrapost)		L = .510 (3 Level Wrapost)		L = .630 (4 Level Wrapost)	
10	0.5	0.2	0.3	40	121-XX-210-41-001000	122-XX-210-41-001000	123-XX-210-41-001000	124-XX-210-41-002000 43 or 93 Plating Code ONLY				
4	0.2	0.3	0.4	102	121-XX-304-41-001000	122-XX-304-41-001000	123-XX-304-41-001000	124-XX-304-41-002000				
6	0.3	0.3	0.4	67	121-XX-306-41-001000	122-XX-306-41-001000	123-XX-306-41-001000	124-XX-306-41-002000				
8	0.4	0.3	0.4	50	121-XX-308-41-001000	122-XX-308-41-001000	123-XX-308-41-001000	124-XX-308-41-002000				
10	0.5	0.3	0.4	40	121-XX-310-41-001000	122-XX-310-41-001000	123-XX-310-41-001000	124-XX-310-41-002000				
14	0.7	0.3	0.4	28	121-XX-314-41-001000	122-XX-314-41-001000	123-XX-314-41-001000	124-XX-314-41-002000				
16	0.8	0.3	0.4	25	121-XX-316-41-001000	122-XX-316-41-001000	123-XX-316-41-001000	124-XX-316-41-002000				
18	0.9	0.3	0.4	22	121-XX-318-41-001000	122-XX-318-41-001000	123-XX-318-41-001000	124-XX-318-41-002000				
20	1.0	0.3	0.4	20	121-XX-320-41-001000	122-XX-320-41-001000	123-XX-320-41-001000	124-XX-320-41-002000				
22	1.1	0.3	0.4	18	121-XX-322-41-001000	122-XX-322-41-001000	123-XX-322-41-001000	124-XX-322-41-002000				
24	1.2	0.3	0.4	16	121-XX-324-41-001000	122-XX-324-41-001000	123-XX-324-41-001000	124-XX-324-41-002000				
28	1.4	0.3	0.4	14	121-XX-328-41-001000	122-XX-328-41-001000	123-XX-328-41-001000	124-XX-328-41-002000 43 or 93 Plating Code ONLY				
20	1.0	0.4	0.5	20	121-XX-420-41-001000	122-XX-420-41-001000	123-XX-420-41-001000	124-XX-420-41-002000				
22	1.1	0.4	0.5	18	121-XX-422-41-001000	122-XX-422-41-001000	123-XX-422-41-001000	124-XX-422-41-002000				
24	1.2	0.4	0.5	16	121-XX-424-41-001000	122-XX-424-41-001000	123-XX-424-41-001000	124-XX-424-41-002000				
28	1.4	0.4	0.5	14	121-XX-428-41-001000	122-XX-428-41-001000	123-XX-428-41-001000	124-XX-428-41-002000				
32	1.6	0.4	0.5	12	121-XX-432-41-001000	122-XX-432-41-001000	123-XX-432-41-001000	124-XX-432-41-002000 43 or 93 Plating Code ONLY				
24	1.2	0.6	0.7	16	121-XX-624-41-001000	122-XX-624-41-001000	123-XX-624-41-001000	124-XX-624-41-002000				
28	1.4	0.6	0.7	14	121-XX-628-41-001000	122-XX-628-41-001000	123-XX-628-41-001000	124-XX-628-41-002000				
32	1.6	0.6	0.7	12	121-XX-632-41-001000	122-XX-632-41-001000	123-XX-632-41-001000	124-XX-632-41-002000				
36	1.8	0.6	0.7	11	121-XX-636-41-001000	122-XX-636-41-001000	123-XX-636-41-001000	124-XX-636-41-002000				
40	2.0	0.6	0.7	10	121-XX-640-41-001000	122-XX-640-41-001000	123-XX-640-41-001000	124-XX-640-41-002000				
42	2.1	0.6	0.7	9	121-XX-642-41-001000	122-XX-642-41-001000	123-XX-642-41-001000	124-XX-642-41-002000				
48	2.4	0.6	0.7	8	121-XX-648-41-001000	122-XX-648-41-001000	123-XX-648-41-001000	124-XX-648-41-002000				
50	2.5	0.6	0.7	8	121-XX-650-41-001000	122-XX-650-41-001000	123-XX-650-41-001000	124-XX-650-41-002000				
52	2.6	0.6	0.7	7	121-XX-652-41-001000	122-XX-652-41-001000	123-XX-652-41-001000	124-XX-652-41-002000 43 or 93 Plating Code ONLY				
50	2.5	0.9	1.0	8	121-XX-950-41-001000	122-XX-950-41-001000	123-XX-950-41-001000	124-XX-950-41-002000				
52	2.6	0.9	1.0	7	121-XX-952-41-001000	122-XX-952-41-001000	123-XX-952-41-001000	124-XX-952-41-002000				
64	3.2	0.9	1.0	6	121-XX-964-41-001000	122-XX-964-41-001000	123-XX-964-41-001000	124-XX-964-41-002000				
SPECIFY PLATING CODE XX =					13 ◆	91	93	41 ◆	43 ◆	47 ◆	XX=Plating Code See to Left	
Sleeve (Pin) 					10 μ" Au	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn	200 μ" Sn		
Contact (Clip) 					30 μ" Au	10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au	Au Flash		



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[123-93-314-41-001000](#) [123-93-320-41-001000](#) [123-93-318-41-001000](#) [123-93-324-41-001000](#) [123-93-328-41-001000](#) [123-93-316-41-001000](#) [123-43-964-41-001000](#) [123-43-950-41-001000](#) [123-43-648-41-001000](#) [123-43-640-41-001000](#) [123-43-632-41-001000](#) [123-43-628-41-001000](#) [123-43-624-41-001000](#) [123-43-424-41-001000](#) [123-43-422-41-001000](#) [123-43-328-41-001000](#) [123-43-324-41-001000](#) [123-43-320-41-001000](#) [123-43-318-41-001000](#) [123-43-316-41-001000](#) [123-43-314-41-001000](#) [123-43-308-41-001000](#) [123-13-318-41-001000](#) [123-13-316-41-001000](#) [123-13-314-41-001000](#) [123-13-308-41-001000](#) [123-93-308-41-001000](#) [123-13-320-41-001000](#) [123-13-324-41-001000](#) [123-93-648-41-001000](#) [123-93-640-41-001000](#) [123-93-632-41-001000](#) [123-13-640-41-001000](#) [123-93-964-41-001000](#) [123-93-950-41-001000](#) [124-13-320-41-002000](#) [123-13-322-41-001000](#) [123-13-624-41-001000](#) [123-13-628-41-001000](#) [123-93-422-41-001000](#) [123-93-424-41-001000](#) [123-93-628-41-001000](#) [123-93-624-41-001000](#) [124-93-964-41-002000](#) [124-93-952-41-002000](#) [124-93-950-41-002000](#) [124-93-652-41-002000](#) [124-93-650-41-002000](#) [124-93-648-41-002000](#) [124-93-642-41-002000](#) [124-93-640-41-002000](#) [124-93-636-41-002000](#) [124-93-632-41-002000](#) [124-93-628-41-002000](#) [124-93-624-41-002000](#) [124-93-432-41-002000](#) [124-93-428-41-002000](#) [124-93-424-41-002000](#) [124-93-422-41-002000](#) [124-93-420-41-002000](#) [124-93-328-41-002000](#) [124-93-324-41-002000](#) [124-93-322-41-002000](#) [124-93-320-41-002000](#) [124-93-318-41-002000](#) [124-93-316-41-002000](#) [124-93-314-41-002000](#) [124-93-310-41-002000](#) [124-93-308-41-002000](#) [124-93-306-41-002000](#) [124-93-304-41-002000](#) [124-93-210-41-002000](#) [123-93-952-41-001000](#) [123-93-652-41-001000](#) [123-93-650-41-001000](#) [123-93-642-41-001000](#) [123-93-636-41-001000](#) [123-93-432-41-001000](#) [123-93-428-41-001000](#) [123-93-420-41-001000](#) [123-93-322-41-001000](#) [123-93-310-41-001000](#) [123-93-306-41-001000](#) [123-93-304-41-001000](#) [123-93-210-41-001000](#) [123-13-964-41-001000](#) [123-13-952-41-001000](#) [123-13-950-41-001000](#) [123-13-652-41-001000](#) [123-13-650-41-001000](#) [123-13-648-41-001000](#) [123-13-642-41-001000](#) [123-13-636-41-001000](#) [123-13-632-41-001000](#) [123-13-432-41-001000](#) [123-13-428-41-001000](#) [123-13-424-41-001000](#) [123-13-422-41-001000](#) [123-13-420-41-001000](#) [123-13-328-41-001000](#)