

MODEL 82

1/4" Diameter

Single Turn

Cermet Trimming

Potentiometer

1



ELECTRICAL

Standard Resistance Range, Ohms	10 to 1Meg
Standard Resistance Tolerance	±10% (<100 Ohms = ±20%)
Input Voltage, Maximum	200 Vdc or rms not to exceed power rating
Slider Current, Maximum	100mA or within rated power, whichever is less
Power Rating, Watts	0.5 at 70°C derating to 0 at 125°C
End Resistance, Maximum	2 Ohms
Actual Electrical Travel, Nominal	220°
Dielectric Strength	600 Vrms
Insulation Resistance, Minimum	1,000 Megohms
Resolution	Essentially infinite
Contact Resistance Variation, Maximum	1% or 1 Ohm, whichever is greater

ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient, Maximum	±100ppm/°C
Operating Temperature Range	-55°C to +125°C
Thermal Shock	5 cycles, -55°C to +125°C (1% ΔRT, 1%ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT, IR 100 Megohms Min.)
Shock, 6ms Sawtooth	100G's (1% ΔRT, 1% ΔVR)
Vibration	20G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (3% ΔRT)
Load Life at 0.5 Watts	1,000 hours at 70°C (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

MECHANICAL



Mechanical Stops	Solid
Torque, Starting Maximum	3 oz.-in. (0.021 N-m)
Weight, Nominal	.02 oz. (0.60 grams)

Fluorinert® is a registered trademark of 3M Company.
Specifications subject to change without notice.







1-65

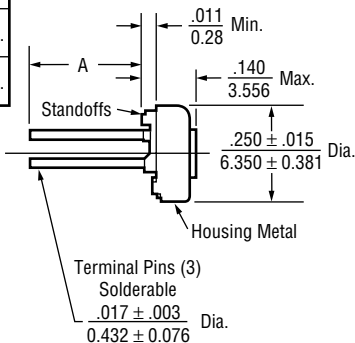Model 82

Model 82P, 82PF

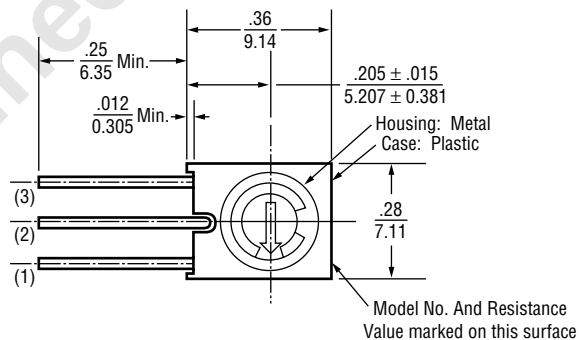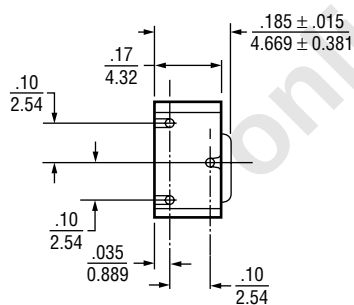Note: Model 82P dimensions applicable to all models except as noted.

**Model 82PA**

STANDARD RESISTANCE VALUES, OHMS

10	100	1K	10K	50K	250K
20	200	2K	20K	100K	500K
50	500	5K	25K	200K	1Meg

1

PACKAGING

Standard: Boxes

Capacity	=	50 Units (82PA, 82PF)
	=	100 Units (All other styles)

Option: Tubes

All units oriented with #1 pin to same side.

	Pin Style		PA	P,M,W
Magazine	Width	=	0.28"	0.34"
	Height	=	0.94"	0.65"
	Length	=	15.6"	27.5"
	Capacity	=	50 Units	100 Units


Option: Tape & Reel, Ammo Pack (Available for 82W Only)

All units oriented with #1 pin to the right of the direction of feed.


	Seat Plane to Centerline of Sprocket Hole	=	.71" (18.03 mm)
Tape	Width	=	18 mm
	Sprocket	=	Single Hole .50" spacing
	Capacity	=	1,000 Units
Reel	Diameter	=	14" (356 mm)
Ammo	Tape Fold	=	12" (305 mm)
	Box	=	1.5" x 13" x 10"

ORDERING INFORMATION

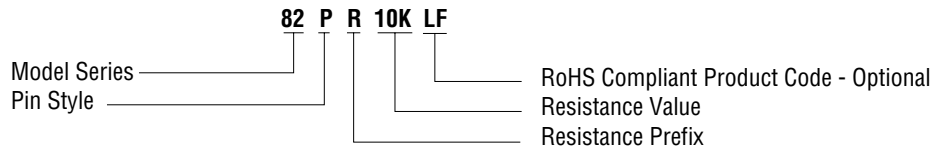
Standard:




Option:

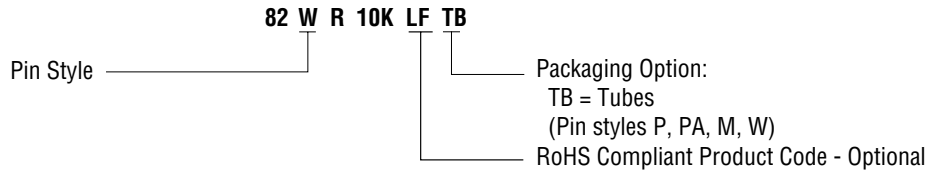

Option:

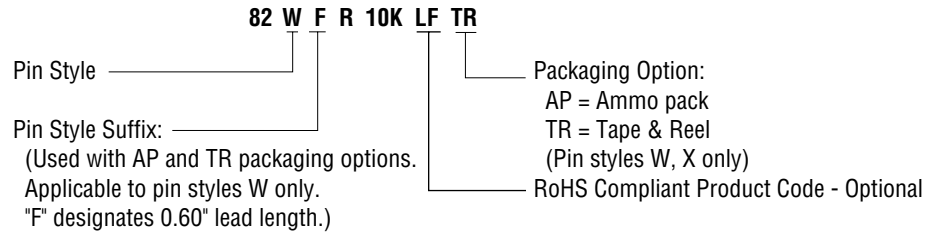


CIRCUIT DIAGRAM



NOTES

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original English units and are provided for general information only.

Tolerances unless otherwise specified:
Linear = $\pm .01$ inches (.25mm)
Angular = ± 2 degrees



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[82MR10K](#) [82MR1K](#) [82PR100K](#) [82PR10K](#) [82PR1K](#) [82PR20](#) [82PR20K](#) [82PR2K](#) [82PR500](#) [82PR5K](#) [82MR20K](#)
[82PFR5K](#) [82PR200K](#) [82PR500K](#) [82MR100KLF](#) [82MR10KLF](#) [82MR1KLF](#) [82MR1MEGLF](#) [82MR200LF](#) [82MR25KLF](#)
[82MR2KLF](#) [82MR500LF](#) [82MR500KLF](#) [82MR50KLF](#) [82MR5KLF](#) [82PAR1KLFTB](#) [82PAR5KLFTB](#) [82PR100LF](#)
[82PR100KLF](#) [82PR10KLF](#) [82PR1KLF](#) [82PR20LF](#) [82PR200LF](#) [82PR200KLF](#) [82PR20KLF](#) [82PR250KLF](#)
[82PR25KLF](#) [82PR2KLF](#) [82PR50LF](#) [82PR500LF](#) [82PR500KLF](#) [82PR50KLF](#) [82PR5KLF](#) [82PR50](#) [82PR1KLFTB](#)
[82PAR10K](#) [82WR10KLF](#) [82PR200LFTB](#) [82PAR500LFTB](#) [82PFR2KLF](#) [82PAR1MEGLF](#) [82WR100LF](#) [82PAR100LF](#)
[82PFR10KLF](#) [82PR500KLTB](#) [82MR250KLF](#) [82PAR20KLFTB](#) [82PAR10KLF](#) [82PAR100KLF](#) [82WR2KLF](#)
[82WR50KLF](#) [82PAR10LFTB](#) [82PAR10LF](#) [82PR100LFTB](#) [82PAR500KLFTB](#) [82PR1MEGLFTB](#) [82PAR2KLF](#)
[82PAR250KLFTB](#) [82MR100LF](#) [82PAR500LF](#) [82PAR100LFTB](#) [82PR1MEGLF](#) [82WR1MEGLF](#) [82PAR200LFTB](#)
[82PR10LF](#) [82PAR500KLF](#) [82MR2MEGLF](#) [82MR100KLFTB](#) [82PAR50KLFTB](#) [82PAR200KLFTB](#) [82PR20KLFTB](#)
[82PAR200LF](#) [82PAR20LF](#) [82MR10LF](#) [82WR1KLF](#) [82PR5KLFTB](#) [82PAR5KLF](#) [82MR200KLF](#) [82PAR50KLF](#)
[82PAR1KLF](#) [82WR50LF](#) [82WR250KLF](#) [82MR20KLF](#) [82PAR10KLFTB](#) [82PAR25KLFTB](#) [82PAR2KLFTB](#)
[82PAR25KLF](#) [82PAR50LFTB](#) [82PR50LFTB](#) [82WR100KLF](#)