


## Plug

### Contact Arrangements

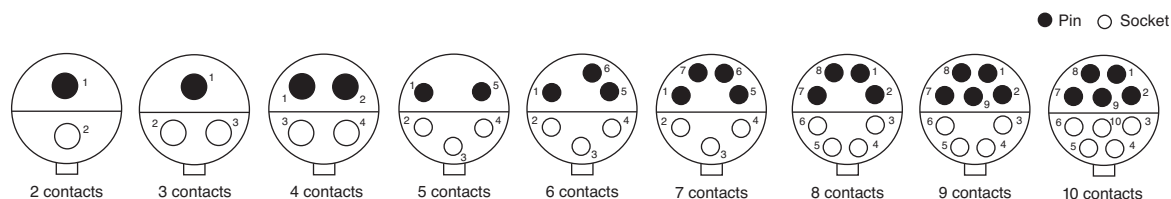


### Part Numbers

#### 2, 3 and 4 Contacts




| No. of contacts | Shell size | Part No.     | A<br>– 0,3 | B<br>– 0,3 | Insulation<br>Ø |
|-----------------|------------|--------------|------------|------------|-----------------|
| 2               | SS2P       | 120-8552-000 | 13,9       | 10,9       | 1,8 – 2,8       |
| 3               | SS3P       | 120-8552-001 | 15,2       | 12,3       | 1,8 – 2,8       |
| 4               | SS4P       | 120-8552-002 | 15,2       | 12,3       | 1,8 – 2,8       |



#### 5, 6 and 7 Contacts



| No. of contacts | Shell size | Part No.     | A<br>– 0,3 | B<br>– 0,3 | Insulation<br>Ø |
|-----------------|------------|--------------|------------|------------|-----------------|
| 5               | SS5P       | 120-8552-005 | 25,3       | 20,2       | 1,8 – 2,8       |
| 6               | SS6P       | 120-8552-006 | 25,3       | 20,2       | 1,8 – 2,8       |
| 7               | SS7P       | 120-8552-007 | 25,3       | 20,2       | 1,8 – 2,8       |



#### 8 to 10 Contacts



| No. of contacts | Shell size | Part No.     | A<br>± 0,3 | B<br>± 0,2 | Insulation<br>Ø |
|-----------------|------------|--------------|------------|------------|-----------------|
| 8               | SS8P       | 120-8552-308 | 28,55      | 23,5       | 1,8 – 2,8       |
| 9               | SS9P       | 120-8552-309 | 28,55      | 23,5       | 1,8 – 2,8       |
| 10              | SS10P      | 120-8552-310 | 28,55      | 23,5       | 1,8 – 2,8       |

