

CATALOG LISTING
MT-4RV34-A28
PAGE 1 OF 1

ISSUE
4

REPLACES
RELEASE NO PR-20387

REVISIONS

A	CO77089	LJF	20 DEC 93
B	CO-80986	LJF	7 JUN 95
C	CO-81413	GRT	16 OCT 95

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

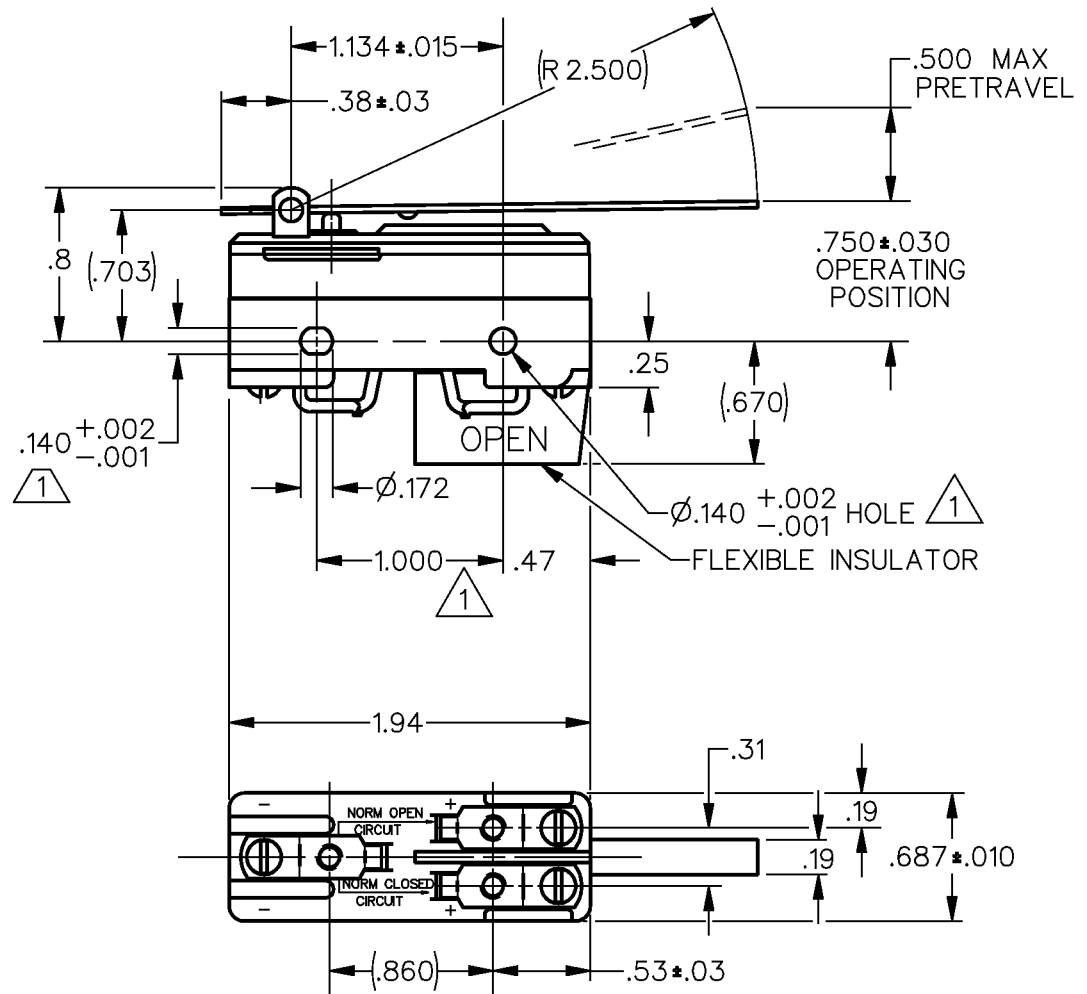


NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000 ± .002 CENTERS
- 2 - FOR BEST RESULTS EITHER POLARIZE THE SWITCH WITH COMMON TERMINAL BEING OF NEGATIVE POLARITY OR MOUNT THE SWITCH WITH BRASS SCREWS AND SPACE AT LEAST .250 FROM MAGNETIC MATERIALS
- 3 - 3X TERMINAL SCREWS FURNISHED UNASSEMBLED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA			SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - 2 OZ MAX	CONTACT ARRANGEMENT S P D T			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE - - - - 1/2 OZ MIN	NON-POLARIZED	VOLTS DC 125 250	MOTOR 1/4 HP + ----- RESISTIVE 10 AMPS 1.5 TO 3.0*	ONE PLACE (.)	± .030
DIFFERENTIAL TRAVEL - - -.085 MAX	POLARIZED OR NON-MAGNETICALLY MOUNTED	VOLTS DC 125 250	MOTOR 1/2 HP + ----- RESISTIVE 10 AMPS 1.5 TO 3.0*	TWO PLACE (.00)	± .015
OVERTRAVEL - - - - .047 MIN	* NOT SUITABLE FOR USE AT LESS THAN 1.5 AMPS + WILL NOT BREAK LOCKED MOTOR CURRENT			THREE PLACE (.000)	± .005
	L168 (NON-POLARIZED) 10A 125 VAC-DC 1/4HP 125 VAC-DC			ANGLES	±
				WEIGHT	

DDM/CAD

DRAWN

J W B 15 NOV 92

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[MT-4RV34-A28](#)