

# CRYSTAL TEST & BURN-IN SOCKET

AXS-1155-04-01

Precision test socket for 11.8x 5.5mm,  
4 pad crystal packages.




RoHS  
Compliant



## FEATURES:

- Accurate and reliable testing of frequency control devices
- Contact force ideal for avoiding measurement error
- Highest quality socket available
- Clam shell design for easy open and close
- Reliable gold plated POGO pins
- Suitable for high temperature burn-in test
- Operating Temperature: -30 ~ +150°C


## SIDE VIEW (OPEN):

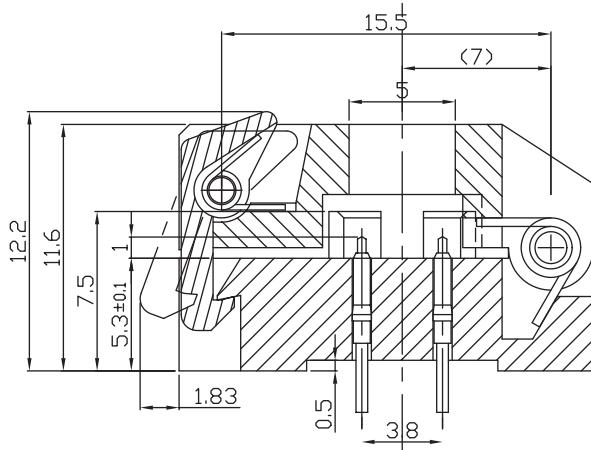


## APPLICATIONS:

- Design stage component engineering evaluation
- Supplier comparison tests
- High temperature burn-in board testing
- Prototyping


## POCKET TOP VIEW:

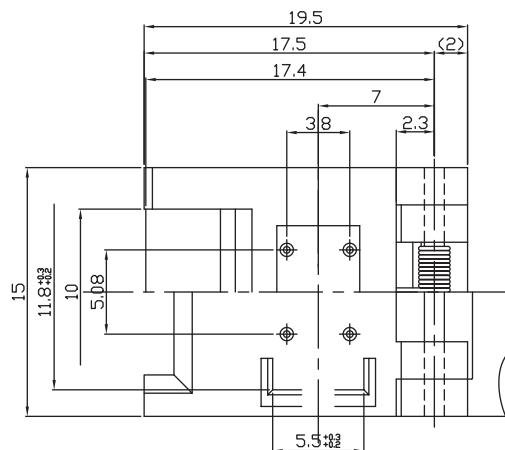

## END VIEW:

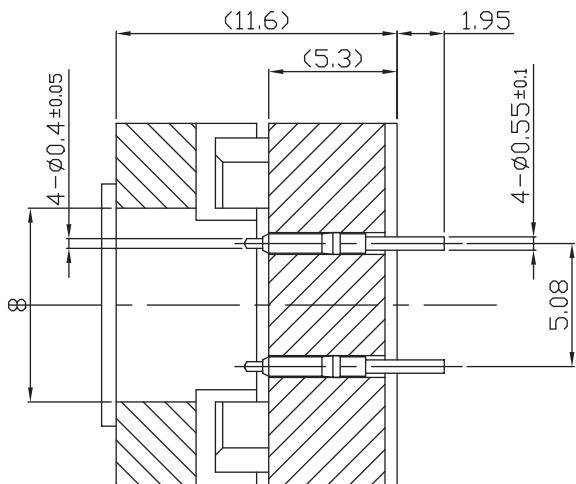

## SUITABLE CRYSTAL PACKAGE DIMENSIONS:

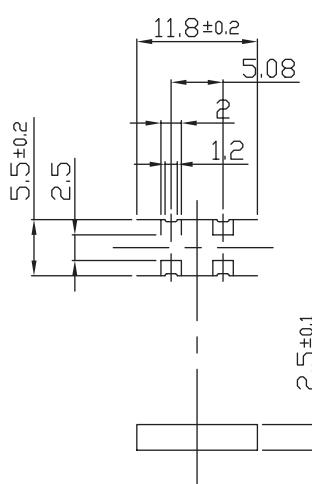

Dimensions: mm

## ORDERING INFORMATION:

When ordering, please refer to part number

**AXS-1155-04-01**

## RECOMMENDED FOR USE WITH DEVICE PACKAGE DIMENSIONS:

**11.8 x 5.5 x 2.5mm**

## COMPATIBLE ABRACON SURFACE MOUNT CRYSTAL:

### ABC2 Series

(for a pdf download go to [www.abracon.com/Resonators/ABC2.pdf](http://www.abracon.com/Resonators/ABC2.pdf))

*\* ABRACON test and burn in sockets are compatible with all industry standard frequency control packages.*

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[AXS-1155-04-01](#)