


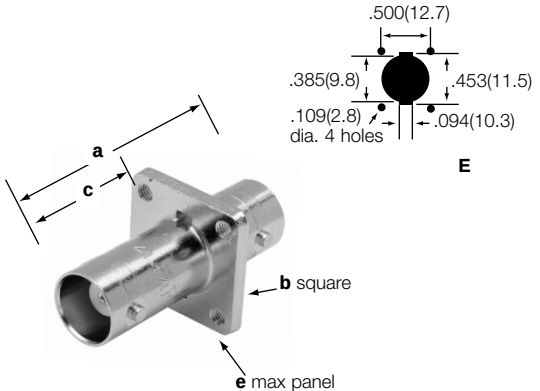


|                                                                                                                                                                                  |                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Fig. 1</p>  <p>BNC Straight Adapters - Jack/Jack<br/><b>31-219</b><br/><b>31-219-RFX</b></p> | <p>Fig. 2</p>  <p>BNC Straight Adapters - Plug/Plug<br/><b>31-218</b><br/><b>31-218-RFX</b></p> |
| <p>Fig. 3</p>  <p>BNC Angle Adapters - Jack/Plug<br/><b>31-9</b><br/><b>31-9-RFX</b></p>        | <p>Fig. 4</p>  <p>BNC Panel Adapter - Jack/Jack<br/><b>47000</b></p>                            |

## BNC ADAPTERS - STRAIGHT, ANGLE, PANEL MOUNT

| Description                     |           | Dimensions, inches (millimeters) |            |            |           | Notes |      | Mtg. Hole | Military Number | Amphenol Number            | Fig. |
|---------------------------------|-----------|----------------------------------|------------|------------|-----------|-------|------|-----------|-----------------|----------------------------|------|
|                                 |           | a                                | b          | c          | e         | Plt.  | Ins. |           |                 |                            |      |
| Straight                        | Jack-Jack | 1.28(32.5)                       | .437(11.1) | —          | —         | P1    | D1   | —         | UG-914/U        | <a href="#">31-219*</a>    | 1 ▲  |
|                                 |           |                                  |            |            |           | P7    | D26  | —         | —               | <a href="#">31-219-RFX</a> | 1 ▲  |
| Straight                        | Plug-Plug | 1.25(31.8)                       | .562(14.3) | —          | —         | P1    | D1   | —         | UG-491A/U       | <a href="#">31-218*</a>    | 2 ▲  |
|                                 |           |                                  |            |            |           | P7    | D1   | —         | —               | <a href="#">31-218-RFX</a> | 2 ▲  |
| Angle                           | Jack-Plug | 1.06(27.0)                       | .562(14.3) | 1.02(25.8) | —         | P1    | D1   | —         | UG-306/U        | <a href="#">31-9*‡</a>     | 3 ▲  |
|                                 |           | 1.06(27.0)                       | .562(14.3) | 1.02(25.8) | —         | P1    | D1   | —         | —               | <a href="#">31-9-RFX</a>   | 3 ▲  |
|                                 |           | 1.09(27.6)                       | .594(15.1) | 1.02(25.8) | —         | P34   | D1   | —         | M55339/14-00306 | <a href="#">31-4561</a>    | 3    |
| Panel, 3-56 Tapped Flange Holes | Jack-Jack | 1.28(32.5)                       | .688(17.5) | .691(17.6) | .250(6.4) | P1    | D1   | E         | —               | <a href="#">47000*</a>     | 4    |

\* recognized under the component program of U.L., Inc. ▲ distributor stocked ‡ IBM 6028521