



ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	DC-XXX-XXX	DEEP CHANNEL PRESS-IN CARD GUIDE
2	1	CS-600 F-10.75	CONDUCTIVE INSERT

REV	DESCRIPTION	DATE	APPROVED
A	ENGINEERING RELEASE.	02/06/03	M. C.
B	ECO#388, ENGINEERING UPDATE.	05/01/03	M. C.
C	Updated Conductive Insert P/N	03/12/08	M. C.

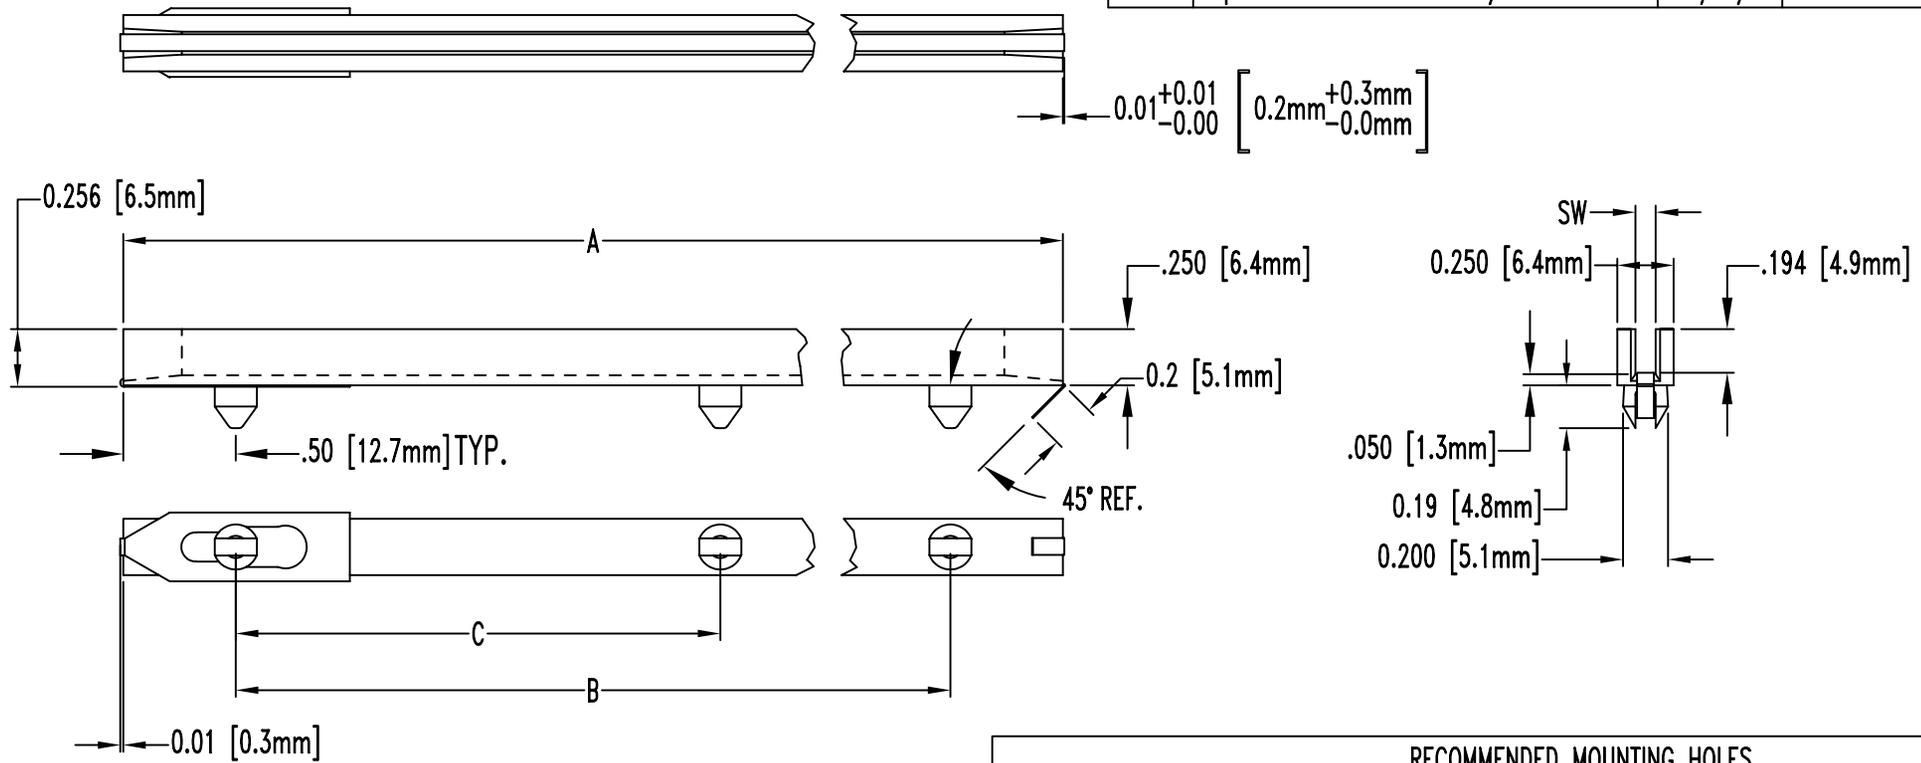

PART NO.	A ±.062 (1.6)	B ±.032 (.8)	C ±.015 (.4)	S.W. ±.005 (.1)	PCB THICKNESS	DESC DWG. NO.
DC-250 CI	2.5 (63.5)	1.5 (38.1)	--			84101-01
DC-450 CI	4.5 (114.3)	3.5 (88.9)	--			84101-02
DC-600 CI	6.0 (152.4)	5.0 (127.0)	--	.080 (2.0)	1/16 (1.6)	84101-03
DC-800 CI	8.0 (203.2)	7.0 (177.8)	3.5 (88.9)			84101-04
DC-450-102 CI	4.5 (114.3)	3.5 (88.9)	--			--
DC-600-102 CI	6.0 (152.4)	5.0 (127.0)	--	.102 (2.6)	3/32 (2.4)	--
DC-800-102 CI	8.0 (203.2)	7.0 (177.8)	3.5 (88.9)			--
DC-450-130 CI	4.5 (114.3)	3.5 (88.9)	--			84101-22
DC-600-130 CI	6.0 (152.4)	5.0 (127.0)	--	.132 (3.4)	1/8 (3.2)	84101-23
DC-800-130 CI	8.0 (203.2)	7.0 (177.8)	3.5 (88.9)			84101-24

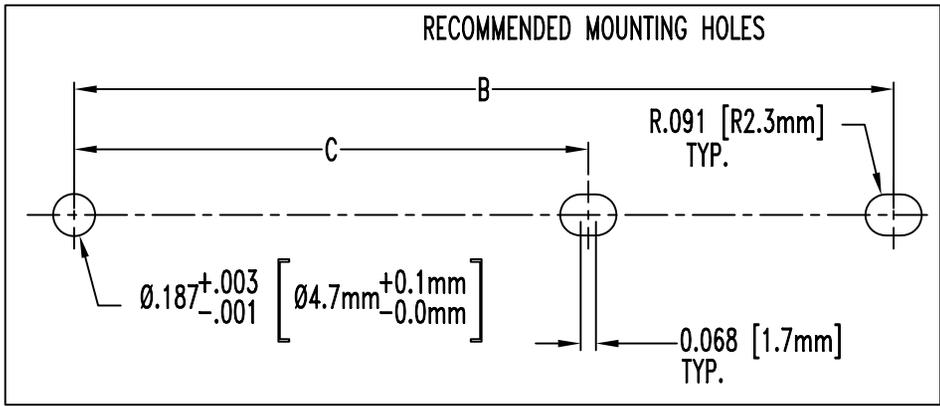

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES

TOLERANCES	
DECIMALS	ANGULAR
.X ± .1	X° ± 1°
.XX ± .01	
.XXX ± .005	

DESIGNER: Michael Chen
DATE: 02/06/03

CHECKER: D. Green
DATE: 02/06/03

Bivar[®]
4 THOMAS, IRVINE, CA.92618
TEL: (949) 951-8808 FAX: (949) 951-3974

PART NAME: DEEP CHANNEL PRESS-IN CARD GUIDE W/ CONDUCTIVE INSERT

SIZE: A	DWG NAME:	DWG NO.: DC-XXX-XXX-CI	REV: C
SCALE: 1=1	CAGE CODE: 32559	SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[BIVAR:](#)

[DC-250-CI](#) [DC-450-102-CI](#) [DC-450-130-CI](#) [DC-450-CI](#) [DC-800-102-CI](#) [DC-800-130-CI](#) [DC-800-CI](#)