


**040 Series (Standard)** (Continued)**Receptacle Contacts
(For Plug Housing)****Material and Finish:**

KLF-5, pre-tinned or selective gold plated

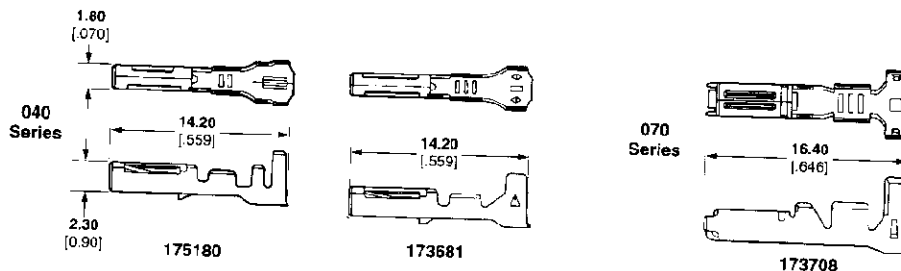


Wire Range AWG	Wire Ins. mm ²	Wire Ins. Diameter	Finish	Part No. of Receptacle Contact		Hand Tool No.
				Strip Form	Loose Piece	
24-20*	0.2~0.56	1.1~1.4	Pre-tinned	175180-1	—	—
		.043~.055	Sel. gold	175180-2	—	—
		1.4~2.0	Pre-tinned	173681-1	175062-1	911738-1
		.055~.079	Sel. gold	173681-2	175062-2	(408-417J)
20-14**	0.56~2.09	2.0~2.9	Pre-tinned	173708-1	175081-1	911771-1
		.079~.114	Sel. gold	173708-2	175081-2	(408-422J)

*040 Series for signal circuit. (Extraction tool No. 755430-1/IS-288J)

**070 Series for signal circuit. (Extraction tool No. 755430-2/IS-287J)

**Tab Contacts
(For Cap Housing)****Material and Finish:**

Pre-tinned brass



Wire Range AWG	Wire Ins. mm ²	Wire Ins. Diameter	Finish	Part No. of Tab Contact		Hand Tool No.
				Strip Form	Loose Piece	
24-20	0.2~0.56	1.4~2.0 .055~.079	Pre-tinned	173682-1	175063-1	911738-2 (408-417J)