

# **Miniature Relay PT**

- 2 pole 12A, 3 pole 10A or 4 pole 6A, 2, 3 or 4 form C (CO) contacts
- **■** DC or AC coil
- Switching performance up to 3000VA
- Relay height 29mm
- Mechanical indicator, optional LED and protection diode
- Manual test tab, optionally lockable
- **■** White marking tabs

Typical applications
Universal use in control and automation

### **Approvals**


VDE Cert. No. 40009108, UL E214025, Lloyds 00/20059


Technical data of approved types on request


Contact Data	PT2	PT3	PT5					
Contact arrangement	2 form C	3 form C	4 form C					
	2 CO	3 CO	4 CO					
Rated voltage		240VAC						
Max. switching voltage	400VAC	400VAC	240VAC					
Rated current	12A	10A	6A					
Limiting making current, max. 20ms	24A	20A	12A					
Limiting breaking current	12A	10A	6A					
Limiting short-time current		300A/30ms						
Switching power	3000VA	2500VA	1500VA					
Contact material	AgNi90/1	10, AgNi90/10	gold plated					
Min. recommended contact load		12V at 10mA						
	gold p	olated: 20mV a	t 1mA					
Initial voltage drop	30n	nV at 100mA/6	VDC					
Frequency of operation								
with/without load		360/36000h <sup>-1</sup>						
Operate time typ., DC coil		15ms						
Release time typ., DC coil, without/v	vith PD	10/18ms						
Bounce time typ., DC coil, form A/fc	rm B	6/8ms						

Contact ratings

Type	Contact	Load	Cycles
IEC 61810			
PT 2 DC/AC coil	C (CO)	12A, 250VAC, cosφ=1, 70°C	70x10 <sup>3</sup>
PT 2 DC/AC coil	A (NO) of C (CO)	9A, 250VAC, cosφ=1, 80°C	150x10 <sup>3</sup>
PT 2 DC/AC coil	A (NO) of C (CO)	4A, 250VAC, cosφ=1, 80°C	300x10 <sup>3</sup>
PT 3 DC/AC coil	C (CO)	10A, 250VAC, cosφ=1, 70°C	100x10 <sup>3</sup>
PT 5 DC/AC coil	C (CO)	6A, 250VAC, cosφ=1, 70°C	100x10 <sup>3</sup>





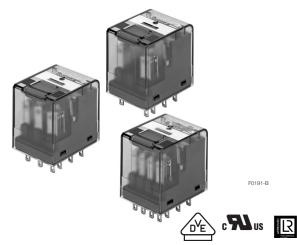

## Contact Data (continued)

Conta	act ratings		
Type	Contact	Load	Cycles
<b>UL</b> 50	8		
PT 2	C (CO)	12A, 250VAC, general purpose, 70°C	6.000
PT 2	C (CO)	12A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 2	A (NO) of C (CO)	12A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 2	A (NO) of C (CO)	12A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 3	C (CO)	10A, 250VAC, general purpose, 70°C	6.000
PT 3	C (CO)	10A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 3	A (NO) of C (CO)	10A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 3	B (NC) of C (CO)	10A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 5	C (CO)	6A, 250VAC, general purpose, 70°C	6.000
PT 5	C (CO)	6A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 5	A (NO) of C (CO)	6A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
PT 5	B (NC) of C (CO)	6A, 250VAC, resistive, 70°C	100x10 <sup>3</sup>
	947-4-1		
PT 2	A (NO) of C (CO)	400VAC, 3.75A, AC3, opposite polarity	
PT 2	A (NO) of C (CO)	230VAC, 1.7A, AC5b (400W lamp load)	),
		opposite polarity, 70°C	
PT 3	A (NO) of C (CO)	250VAC, 2A, AC3, opposite polarity 70	
PT 3	A (NO) of C (CO)	230VAC, 1.7A, AC5b (400W lamp load)	),
		opposite polarity, 70°C	
PT 5	A (NO) of C (CO)	250VAC, 3A, AC3, same polarity 70°C	
PT 5	A (NO) of C (CO)	230VAC, 1.7A, AC5b (400W lamp load)	),
DT 0	4 (410) ( 6 (600)	same polarity, 70°C	
PT 2	A (NO) of C (CO)	DC coil, AC-15, 250VAC/4A, opposite	oolarity
DT 0	A (NO) -4 O (OO)	6.050	
PT 3 PT 5	A (NO) of C (CO) A (NO) of C (CO)	DC coil, AC-15, 250VAC/4A, same pola DC coil, AC-15, 250VAC/4A, same pola	
PT 2	' ' '	7 7 1	,
F12	A (NO) of C (CO)	AC coil, AC-15, 250VAC/2A, opposite p 6.050	Joianty
PT 3	A (NO) of C (CO)	AC coil, AC-15, 250VAC/2A, same pola	ority 6 OEO
PT 5	A (NO) of C (CO)	AC coil, AC-15, 250VAC/2A, same pola	
	/5 A (NO) of C (CO)	DC-13, 24VDC/4A 6.050	arity 0.000
F12/3/	73 A (190) OI C (CO)	DO-13, 24VDO/4A 0.000	

Coil Data	
Coil voltage range	6 to 220VDC
	6 to 230VAC
Operative range, IEC 61810	
DC coil, AC-coil 50Hz	2
AC coil 60 Hz at 70°C	90110% of rated voltage
Coil insulation system according UL	class 155 (F)

Mechanical endurance

DC coil

AC coil

30x10<sup>6</sup> operations

20x10<sup>6</sup> operations



# Miniature Relay PT (Continued)

750

**Other Data** 

Coil Da	ita (continue	ed)			
Coil vers	sions, DC co	il, standard			
Coil	Rated	Operate	Release	Coil	Rated coil
code	voltage	voltage	voltage	resistance	power
	VDC	VDC	VDC	$\Omega \pm 10\%^{1)2}$	mW
006	6	4.5	0.6	48	750
012	12	9.0	1.2	192	750
024	24	18.0	2.4	777	741
048	48	36.0	4.8	3072	750
060	60	45.0	6	4845 <sup>1)</sup>	743
110	110	82.5	11	161332)	750

22

645332)

165.0

Coil ve	ersions	, DC coil wit	h bipolar	LED or LED	and protec	tion diode
Coil co	ode	Rated	Operate	Release	Coil	Rated coil
bipol.	LED+	voltage	voltage	voltage	resistance	+LED pwr.
LED	PD <sup>3</sup> )	VDC	VDC	VDC	$\Omega \pm 10\%^{1)2)}$	mW
L06	LA6	6	4.5	0.6	48	750+3.5
L12	LB2	12	9.0	1.2	192	750+10
L24	LC4	24	18.0	2.4	777	741+18
L48	LE8	48	36.0	4.8	3072	750+38
L60	LG0	60	45.0	6.0	4845 <sup>1)</sup>	743+56
M10	MB0	110	82.5	11.0	16133 <sup>2)</sup>	750+96.5
N20	NC0	220	165.0	22.0	64533 <sup>2)</sup>	750+202.5

<sup>1)</sup> Coil resistance ±12%, 2) Coil resistance ±15%,

#### Coil versions, AC coil, 50/60Hz


220


220

			,				
	Coil c	ode	Rated	Operate	Release	Coil	Rated coil
STD LED voltage		voltage	voltage	resistance	power		
		50/60Hz	50/60Hz		50/60Hz		
			VAC	VAC	VAC	$\Omega \pm 10\%^{1)2)}$	VA
	506	R06	6	4.8/5.4	1.8	11	1.0/0.85
	512	R12	12	9.6/10.8	3.6	48	1.0/0.85
	524	R24	24	19.2/21.6	7.2	192	1.0/0.79
	548	R48	48	38.4/43.2	14.4	777	1.0/0.87
	560	R60	60	48.0/54.0	18.0	1306	1.0/0.87
	615	S15	115	92.0/103.5	34.5	4845 <sup>1)</sup>	1.0/0.86
	730	T30	230	184/207	69.0	19465 <sup>2)</sup>	1.0/0.90

<sup>1)</sup> Coil resistance ±12%, 2) Coil resistance ±15%

All figures are given for coil without pre-energization, at ambient temperature +23°C





Insulation Data	PT2	PT3	PT5
Initial dielectric strength			
between open contacts	$1200V_{rms}$	$1200V_{rms}$	1200V <sub>rms</sub>
between contact and coil	$2500V_{rms}$	$2500V_{rms}$	2500V <sub>rms</sub>
between adjacent contacts	$2500V_{rms}$	2500V <sub>rms</sub>	2000V <sub>rms</sub>
Initial surge withstand voltage			
between contact and coil	50	000V (1.2/50 <sub>L</sub>	is)
Clearance/creepage			
between contact and coil		≥3/4mm	
Material group of insulation parts		IIIa	
Pollution degree		2	

Material compliance: EU RoHS/ELV,	China RoHS, REACH, Halogen content
refer to the	Product Compliance Support Center at
www.te.co	om/customersupport/rohssupportcenter
Ambient temperature	-40 to +70°C
Cold storage, IEC 60068-2-1	-40°C/16h
Dry heat, IEC 60068-2-2	70°C/16h

Dry heat, IEC 60068-2-2 70°C/16h

Category of environmental protection
IEC 61810 RTII - flux proof

Vibration resistance (functional),
form A (NO)/form B (NC) 7/4g

Shock resistance (functional), form A (NO)/form B (NC) 20/5g Terminal type PCB-THT, plug-in quick-connect Cover retention, pull/push force 100/100N Weight 30g Mounting distance, for mounting on PCB 5mm Resistance to soldering heat THT IEC 60068-2-20 270°C/10s Packaging unit 10/250pcs

# Accessories For details see datasheet Note: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

Package PT	
	Package PT

<sup>3)</sup> Protection diode PD; standard polarity: +A1/-A2


All figures are given for coil without pre-energization, at ambient temperature +23°C



# Miniature Relay PT (Continued)

### PCB layout / terminal assignment

Bottom view on pins

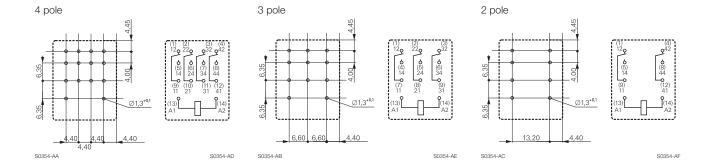






protection diode+LED




### Dimensions

Solder- and plug-in terminals (standard version)

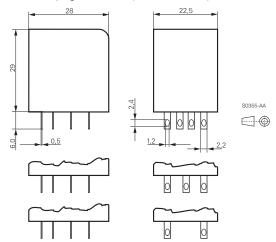



http://relays.te.com/definitions

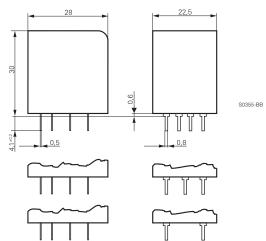



# Miniature Relay PT (Continued)

Produc	t code structure		Typical product code PT	5	7	0	730
Туре	T Miniature Relay PT						
	arrangement			l			
2	•						
3	3 form C contacts (3 CO contacts)						
5	4 form C contacts (4 CO contacts)						
Contact	material				-		
7	AgNi 90/10, with test button	8	AgNi 90/10 gold plated, with test button				
2	AgNi 90/10, without test button	3	AgNi 90/10 gold plated, without test button				
Version							
0	Standard, 2.8mm quick connect term.	1	PCB terminals				
Coil							
C	Coil code: please refer to coil versions table						
Other type	s on request						

Product code	Cont. Config.	Cont. material	Version	Coil	Coil	Part number
PT270024	2 form C	AgNi 90/10	AMP 2.8	DC coil	24VDC	4-1419111-2
PT270524	2 CO contacts	test button	connectors	AC coil	24VAC	4-1419111-8
PT270615					115VAC	5-1419111-0
PT270730					230VAC	5-1419111-1
PT270L24				DC coil+LED	24VDC	9-1415001-1
PT270R24				AC coil+LED	24VAC	1415002-1
PT270S15					115VAC	2-1415039-1
PT270T30					230VAC	3-1415002-1
PT271024			PCB terminals	DC coil	24VDC	5-1419111-3
PT271524				AC coil	24VAC	5-1419111-6
PT271615					115VAC	4-1419135-0
PT271730					230VAC	5-1419111-8
PT370024	3 form C	AgNi 90/10	AMP 2.8	DC coil	24VDC	6-1419111-1
PT370524	3 CO contacts	test button	connectors	AC coil	24VAC	6-1419111-6
PT370615					115VAC	6-1419111-8
PT370730					230VAC	6-1419111-9
PT370L24				DC coil+LED	24VDC	5-1415002-1
PT370R24				AC coil+LED	24VAC	7-1415002-1
PT370S15					115VAC	9-1415039-1
PT370T30					230VAC	9-1415002-1
PT371024			PCB terminals	DC coil	24VDC	7-1419111-1
PT371524				AC coil	24VAC	7-1419111-3
PT371615					115VAC	1393154-8
PT371730					230VAC	7-1419111-5
PT570024	4 form C	AgNi 90/10	AMP 2.8	DC coil	24VDC	1-1393154-2
PT570524	4 CO contacts	test button	connectors	AC coil	24VAC	8-1419111-7
PT570615					115VAC	9-1419111-0
PT570730					230VAC	9-1419111-1
PT570L24				DC coil+LED	24VDC	6-1415001-1
PT570LC4				DC coil+LED+PD	0.4) (4.0)	7-1415541-0
PT570R24				AC coil+LED	24VAC	7-1415001-1
PT570S15					115VAC	7-1415003-1
PT570T30			DOD I I I	500 11	230VAC	8-1415001-1
PT571024			PCB terminals	DC coil	24VDC	9-1419111-3
PT571524				AC coil	24VAC	9-1419111-6
PT571615					115VAC	1-1393154-5
PT571730		A NI 00/10	ANAD O O	DO 1	230VAC	9-1419111-8
PT580024		AgNi 90/10	AMP 2.8	DC coil	24VDC	1-1393154-7
PT580524		gold plated	connectors	AC coil	24VAC 230VAC	2-1393154-1
PT580730		test button		DC asili LED		2-1393154-2
PT580L24				DC coil+LED	24VDC	5-1415026-1
PT580R24				AC coil+LED	24VAC	6-1415026-1
PT580T30			DOD townsinel-	DC soil	230VAC	7-1415026-1
PT581024			PCB terminals	DC coil	24VDC	7-1419135-2
PT581730	1			AC coil	230VAC	2-1393154-3