

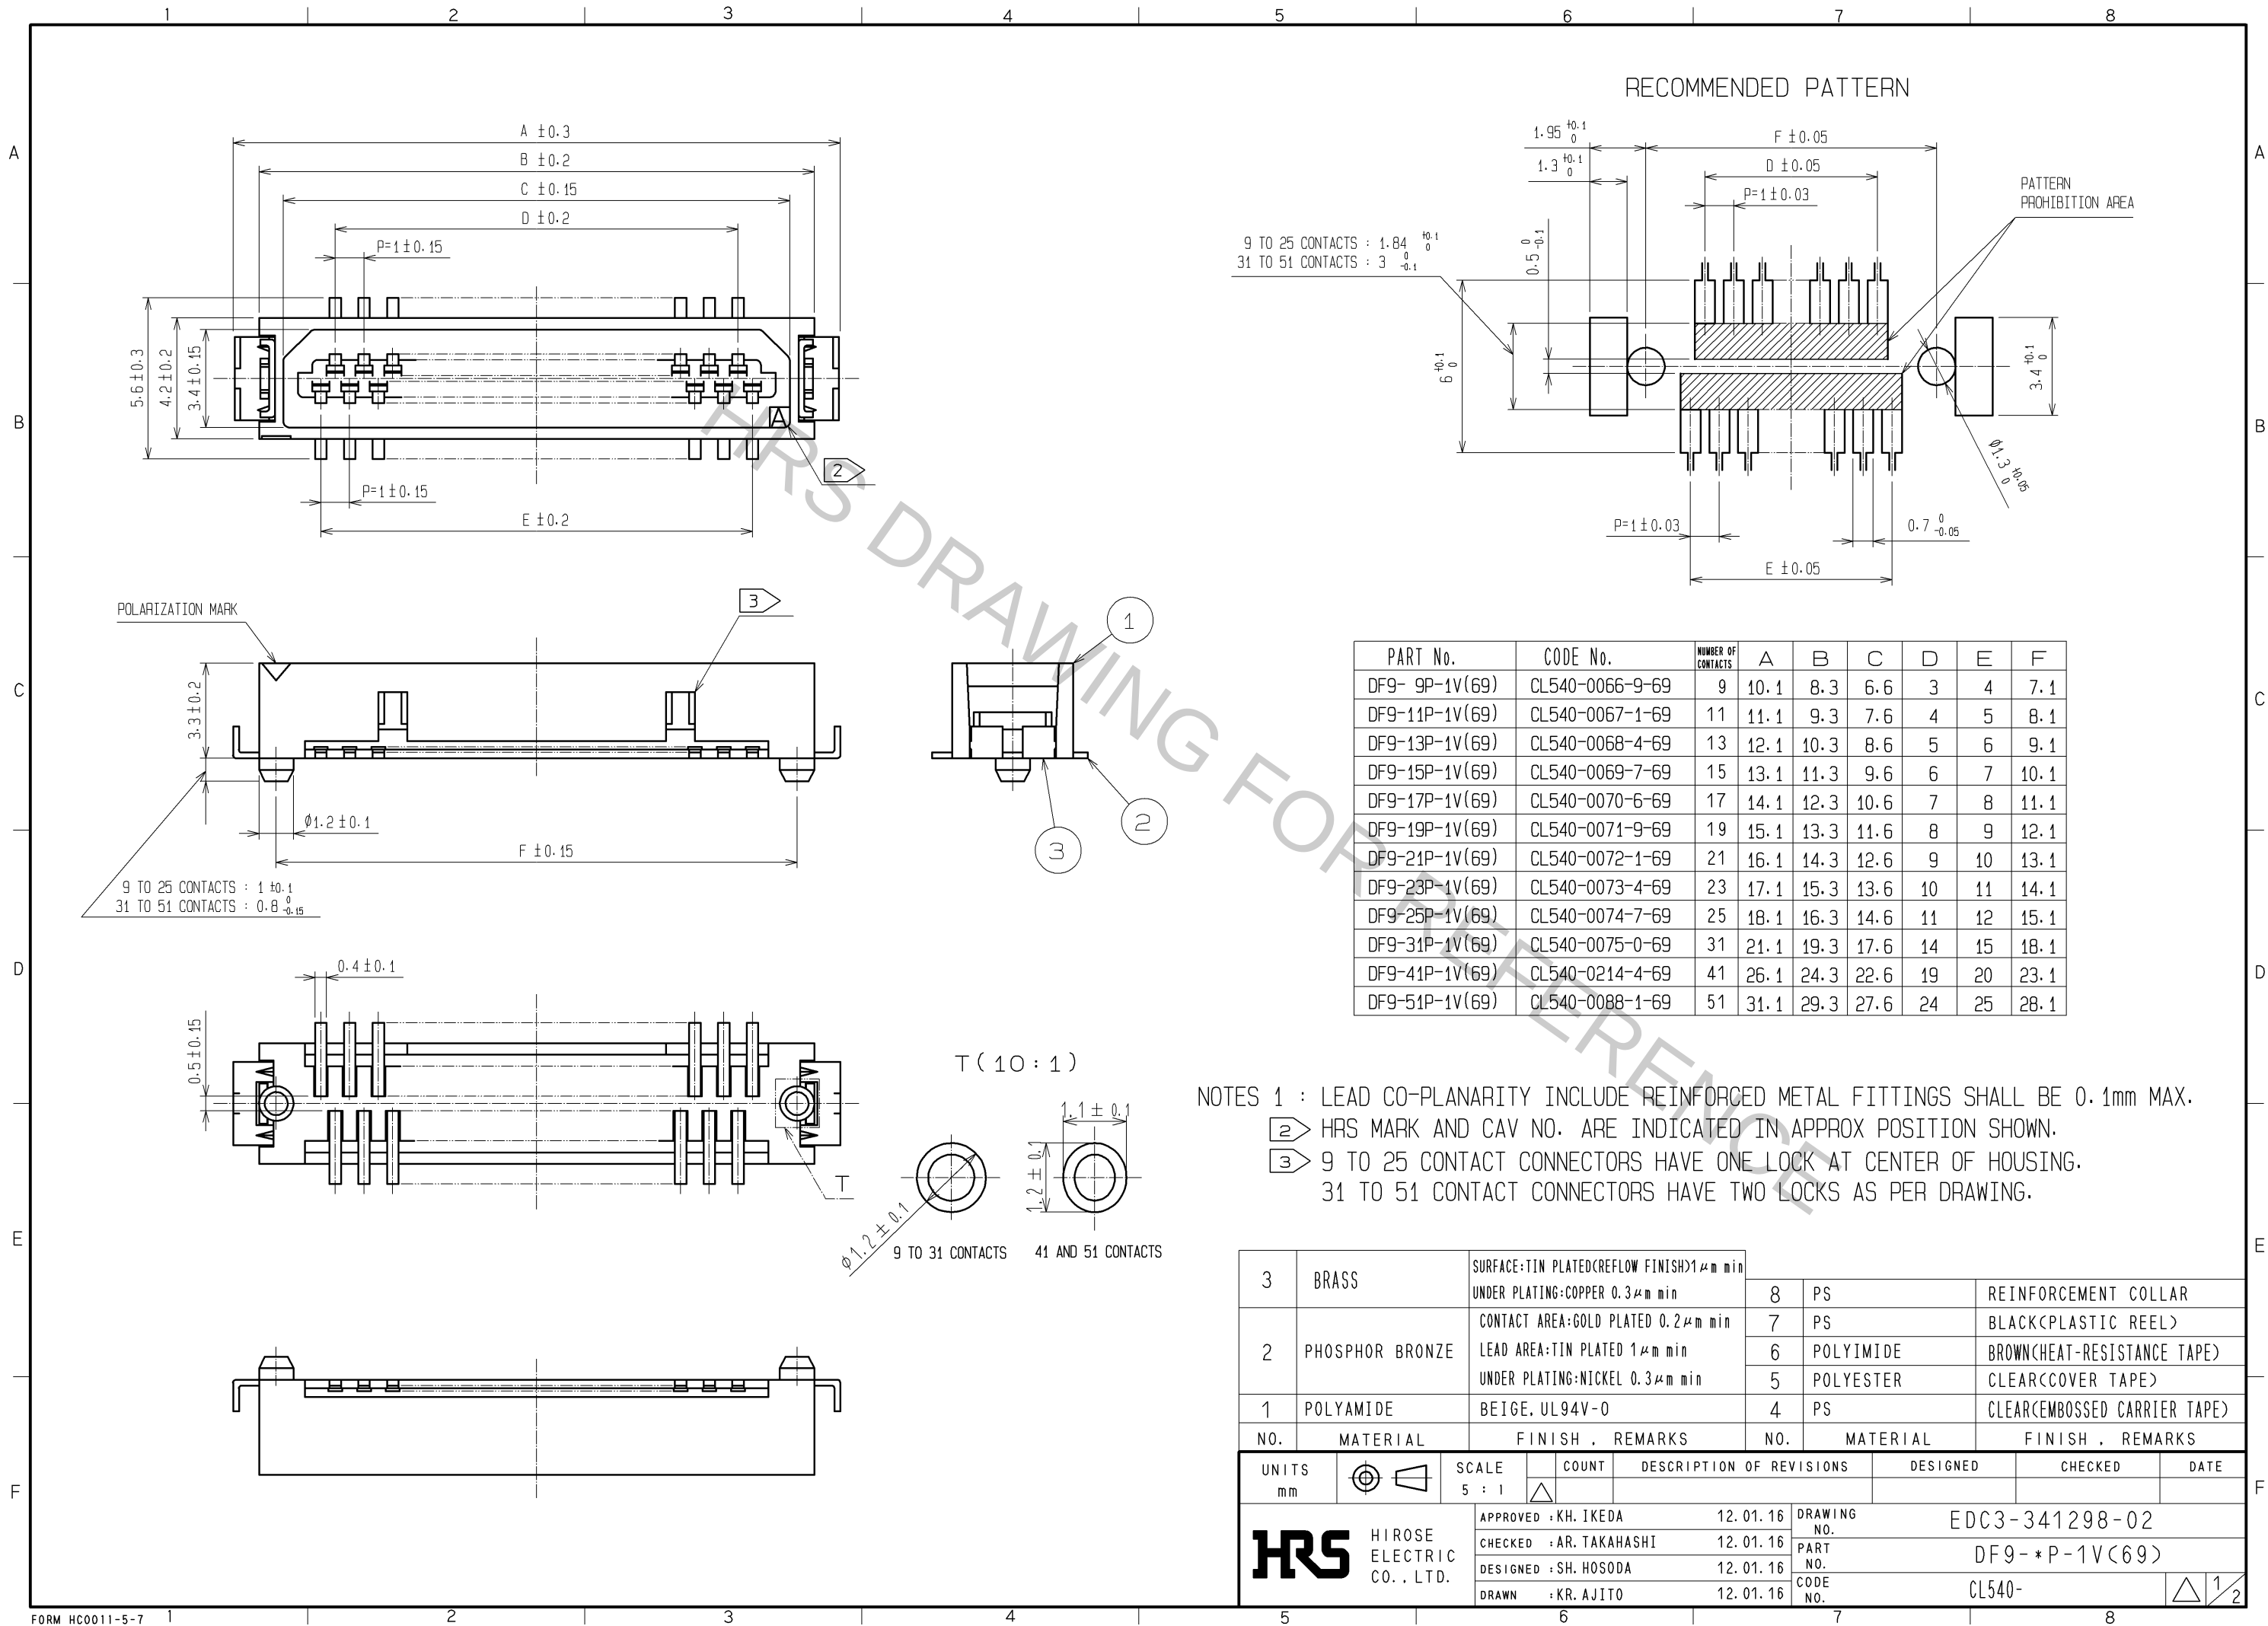
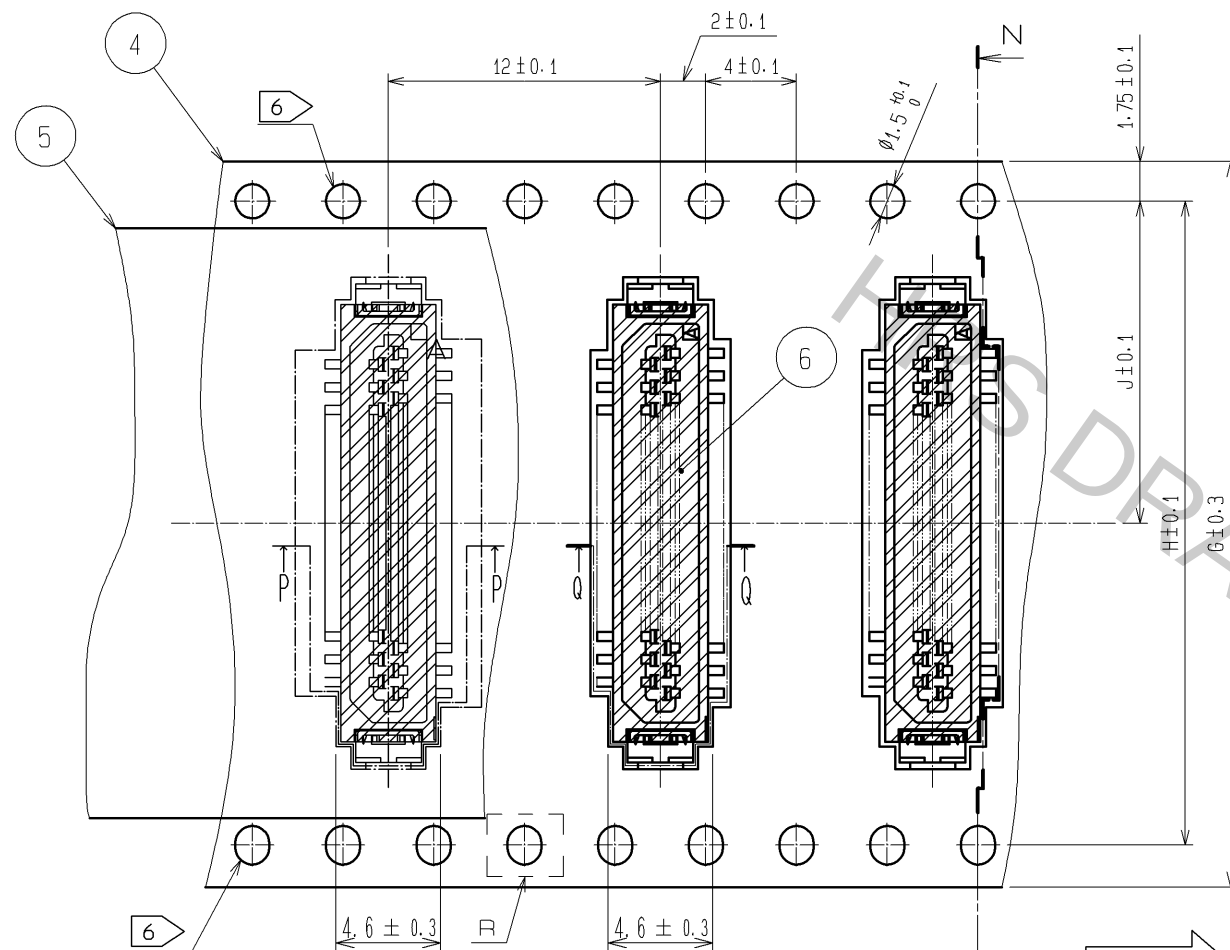


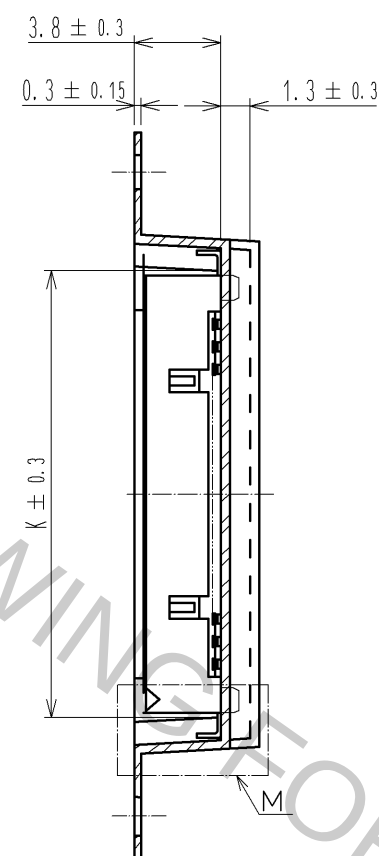

エンボスキャリアテープ(3:1)


$$\text{N}-\text{N}(3:1)$$


STYLE AND DIMENSION OF REEL (FREE)

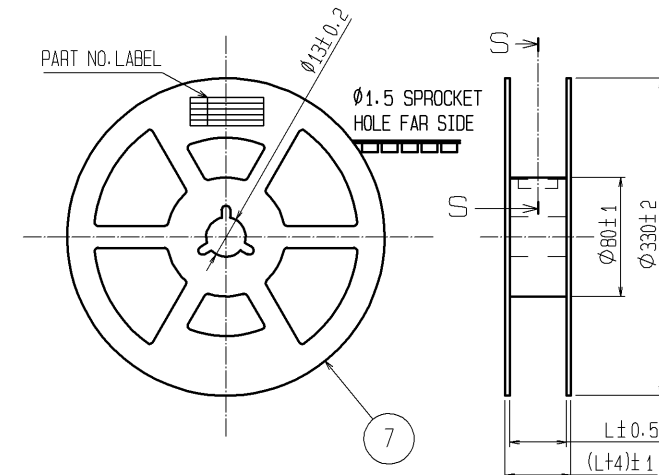

PART No.	CODE No.	NUMBER OF CONTACTS	G	H	J	K	L
DF9-9P-1V(69)	CL540-0066-9-69	9	24	—	11.5	8.7	25.5
DF9-11P-1V(69)	CL540-0067-1-69	11	24	—	11.5	9.7	25.5
DF9-13P-1V(69)	CL540-0068-4-69	13	24	—	11.5	10.7	25.5
DF9-15P-1V(69)	CL540-0069-7-69	15	24	—	11.5	11.7	25.5
DF9-17P-1V(69)	CL540-0070-6-69	17	24	—	11.5	12.7	25.5
DF9-19P-1V(69)	CL540-0071-9-69	19	24	—	11.5	13.7	25.5
DF9-21P-1V(69)	CL540-0072-1-69	21	24	—	11.5	14.7	25.5
DF9-23P-1V(69)	CL540-0073-4-69	23	32	28.4	14.2	15.7	33.5
DF9-25P-1V(69)	CL540-0074-7-69	25	32	28.4	14.2	16.7	33.5
DF9-31P-1V(69)	CL540-0075-0-69	31	32	28.4	14.2	19.7	33.5
DF9-41P-1V(69)	CL540-0214-4-69	41	44	40.4	20.2	24.7	45.5
DF9-51P-1V(69)	CL540-0088-1-69	51	44	40.4	20.2	29.7	45.5

NOTES 4 : 1 REEL 1000 CONNECTORS.

5 : AT THE BEGINNING OF THE REEL,
30 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL,
20 COMPONENTS SHALL BE EMPTY.




6 LET THE SENDING HOLE OF 9 TO 21 CONTACTS
BE ONLY THE UPPER ONE SIDE TOWARD A DRAWING.
THE SENDING HOLE OF 23 OR MORE CONTACTS
IS ESTABLISHED IN BOTH SIDES, AS SHOWN IN A FIGURE.

7 A POCKET SHAPE IS DIFFERET AT INTERVALS OF EACH
CAVITY NUMBER TO AVOID OVERLAP.

8 : PEEL FORCE REFERS TO JIS C 0806.

9 AFTER PACKING, ROLL 2 METERS OF THE REINFORCEMENT
COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL
POCKET, AND TAPE DOWN AT THE END THE COLLAR.

P-P(3:1)

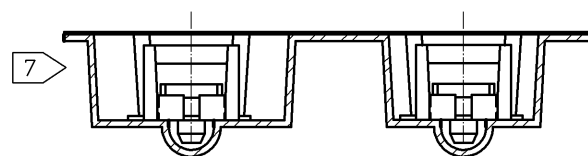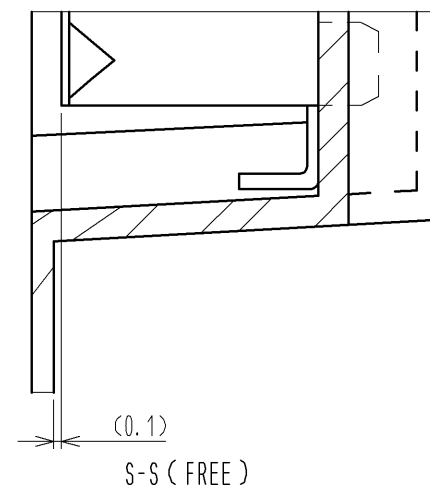 $Q-Q(3:1)$  $M(10:1)$ 

DETAIL OF PART NO. LABEL

- SUPPLIER
- QUANTITY
- PART NO.
- CODE NO.
- DATE OF MANUFACTURED

生産月日	年 月 日
図番	CL540-*****-**-69
品名	DF9-*P-1V(69)
納入数量	1000K0
納入者	ヒロセ電機(株)


$$R(10:1)$$


Diagram 8 illustrates a cross-section of a component with a reinforcement collar, taping, and a tape and reel pocket. The diagram shows a curved structure with a central channel. A reinforcement collar is shown on the left, and a tape and reel pocket is shown on the right. The taping is indicated by a hatched area. A circular callout with the number 8 is present.